

GBP PRICES VALID FROM 1 APRIL 2025

GEBERIT SUPPLY SYSTEMS PRODUCT GUIDE AND PRICE LIST

**KNOW
HOW**
INSTALLED

Geberit Mapress Stainless Steel	7
Geberit Mapress Carbon Steel	107
Geberit Mapress Copper	163
Geberit Mapress CuNiFe	217
Geberit FlowFit	239
Pipe Valve Fittings	297
Tools	319
Appendix	361

Swiss precision, spirit of innovation and art of engineering

Since the day it all began in 1874 in Switzerland, we have been defined by our experiences. Geberit has been among the pioneers of the industry and is still setting trends with comprehensive system solutions.

Those who use Geberit systems are playing safe. No uncertainties that can result when combining components from different manufacturers and no unnecessary material costs and installation workload. In addition, Geberit systems offer maximum reliability and economic viability, and cause a minimum of environmental impact.

Geberit Mapress Pressing Technology

Geberit Mapress is a metal pressing system that provides an efficient, safe, and reliable solution for a range of different job requirements. To ensure a safe and long lasting connection the fitting and pipe are pressed once the pipe has been inserted to the required insertion depth.

Reduce your down time and improve safety with Geberit Mapress

- The system can be fixed wet so no draining required
- Reduced flushing time due to a cleaner installation process
- No hot works and no cooling down period
- Unpressed joints leak during pressure test
- Coloured pressing indicators help identify the material and pressed fittings
- Protection end caps stop debris and dirt getting into the system

A little Know-how goes a long way

Geberit provide installer training at purpose built training academies in Warwick and Dublin – providing the Know-how for installers to feel confident in installing Geberit products.

At Geberit we have a dedicated technical support team on hand and ready to help. To contact us call 01926 516800 or email technical@geberit.co.uk

Geberit at your fingertips

Also available to you is the Geberit ProApp where you can get access to product specifications, installation instructions and videos. You can also identify any Geberit product simply by scanning its barcode



ProApp QR-Code for Apple App Store:




ProApp QR-Code for Google Play Store:



From beginning to end

With an in-depth range of products and systems, Geberit provides innovative solutions for water supply, use and drainage. Once installed, many Geberit products remain invisible to the end user. And they fulfil their function for many decades thanks to their high level of quality and reliability.

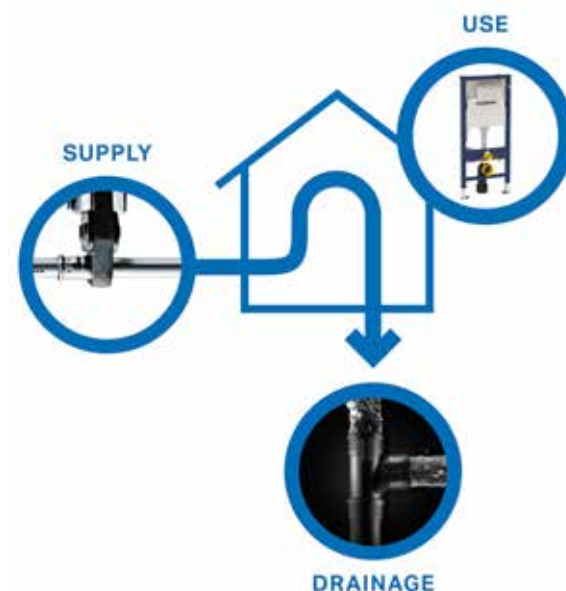





Geberit Mapress Stainless Steel

Preliminary Remarks.....	9
Application overview – Geberit Mapress Stainless Steel for liquid media	11
Application overview – Geberit Mapress Stainless Steel for gaseous media.....	11
Geberit Mapress Stainless Steel.....	12
System pipes 1.4401	12
Pipe nipples	13
Couplings	13
Reducers.....	15
Bends.....	16
T-pieces.....	20
Adaptors, permanent.....	22
Adaptors and connections, detachable.....	29
Compensators	38
Feed-throughs	39
Sealings.....	39
Connections	40
Geberit Mapress Stainless Steel, gas.....	42
System pipes 1.4401	42
Pipe nipples	43
Couplings	44
Reducers.....	45
Bends.....	46
T-pieces.....	50
Adaptors, permanent.....	52
Adaptors and connections, detachable.....	55
Sealings.....	59
Connections	60

Geberit Mapress Stainless Steel, silicone-free	62
System pipes 1.4401	62
Couplings	63
Reducers	64
Bends	64
T-pieces	66
Adaptors, permanent	68
Adaptors and connections, detachable	71
Sealings	77
Connections	78
Compensators	79
Feed-throughs	79
Geberit Mapress Stainless Steel, FKM, blue	80
System pipes 1.4401	80
Pipe nipples	81
Couplings	81
Reducers	82
Bends	83
T-pieces	86
Adaptors, permanent	89
Adaptors and connections, detachable	92
Sealings	97
Feed-throughs	98
Accessories for Geberit Mapress Stainless Steel	98
Pipe fastenings	98
Connector fastenings	100
System seals	100
Sets of bolts for flange connections	105



Preliminary Remarks

Introduction to Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

In addition to the standard Geberit Mapress Stainless Steel product range, LABS free fittings are also available.

Benefits of Geberit Mapress Stainless Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Protective caps ensure installation is clean from start to finish
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

High molybdenum content

High resistance to corrosion due to 2.2% minimum Molybdenum content compared to the industry standard of 2%

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Stainless Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Always check that you are using the correct tools

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress Stainless Steel for liquid media

Geberit Great Britain, Version: December 2024

Application purposes	Operating temperature	Maximum operating pressure	Pipes		Fittings		
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	Stainless steel blue indicator	Gunmetal white indicator	
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa ³⁾	✓	✓	✓	✓	
For cooling and heating water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	
For cooling and heating water with antifreeze agent	–30 – +120 °C ¹⁾	16 bar / 1600 kPa	✓	✓	✓	✓	
For district heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓	✓	
For district heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓	✓	✓	✓	
For saturated steam ≤ 120 °C	0–120 °C	2 bar/200 kPa	✓		✓		
For saturated steam ≤ 155 °C	0–155 °C	4.5 bar / 450 kPa	✓		✓		
For service water and process water	0–100 °C	16 bar / 1600 kPa	5)	5)	5)		
For treated water	0–100 °C	16 bar / 1600 kPa	✓ ⁶⁾	✓ ⁶⁾	✓ ⁶⁾		
For rainwater with a pH value of > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓	✓		
For grey and black water with pH value > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓	✓		
For extinguishing water (wet)	0–100 °C	16 bar / 1600 kPa	✓		✓		
For extinguishing water (wet/dry, dry)	0–100 °C	16 bar / 1600 kPa	✓		✓		
For sprinklers (wet)	0–100 °C	16 / 10 bar ⁴⁾ 1600 / 1000 kPa	✓		✓		
For sprinklers (wet/dry, dry)	0–100 °C	16 / 10 bar ⁴⁾ 1600 / 1000 kPa	✓		✓		
For thermal media (solar)	–25 – +220 °C ²⁾	16 bar / 1600 kPa	✓	✓	✓	✓	
For mineral and lubricating oil	Upon request	Upon request	5)		5)		
For motor fuels (e.g. diesel)	Upon request	Upon request	5)		5)		
For chemicals and technical liquids	Upon request	Upon request	5)		5)		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

²⁾ Lifetime with collector standstill: 200 h/a at 180 °C; 60 h/a at 200 °C; total 500 h/lifetime at 220 °C

³⁾ 10 bar / 1000 kPa for MasterFix and MeplaFix

⁴⁾ 16 bar / 1600 kPa for d22–76.1 mm, 10 bar / 1000 kPa for d88.9–108 mm

⁵⁾ Following Geberit approval

⁶⁾ Application range according to TI "Treated Waters"

⁷⁾ Only use fittings with union nuts made of CrNi steel



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

Application overview – Geberit Mapress Stainless Steel for gaseous media

Geberit Great Britain, Version: December 2024

Application purposes	Operating temperature	Maximum operating pressure	Pipes		Fittings		
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	Stainless steel blue indicator		
For compressed air (oil purity class 0–3)	0–100 °C	25/16/12 bar 2500/1600/1200 kPa	✓ ³⁾	✓ ³⁾	✓		
For compressed air (oil purity class 0–X)	0–100 °C	25/16/12 bar 2500/1600/1200 kPa	✓ ³⁾	✓ ³⁾	✓		
For negative pressure ¹⁾	0–100 °C	Abs. ≥ 0,2 bar/20 kPa	✓	⁴⁾	✓		
For inert gases (e.g. nitrogen)	0–100 °C	25/16/12 bar 2500/1600/1200 kPa	✓ ³⁾	✓ ³⁾	✓		
For industrial gases (e.g. acetylene, shielding gases)	Upon request	Upon request	⁴⁾		⁴⁾		
For natural gases	–20 – +70 °C	MOP 5/malleable cast iron ⁵⁾	✓		✓		
For liquefied gases	–20 – +70 °C	MOP 5/malleable cast iron ⁵⁾	✓		✓		
For biogases	Upon request	Upon request	⁴⁾		⁴⁾		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.
Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

²⁾ Malleable cast iron 0.1 if thread > 2"

³⁾ 25 bar / 2500 kPa for d12–54 mm (d35–54mm only with pressing collars), 16 bar / 1600 kPa for d76.1 mm, 12 bar / 1200 kPa für d88.9–108 mm

⁴⁾ Following Geberit approval

⁵⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.




	Seal rings				Flat gaskets for screw connections			Flange gaskets
	CIIR, black	FKM, blue	FKM, white	FPM, red	EPDM, black	FPM, green	Fibre composite material	Fibre composite material
	✓				✓		✓	✓
	✓ ¹⁾				✓ ¹⁾		✓	✓
	✓ ¹⁾						✓ ⁷⁾	✓
	✓ ¹⁾					✓	✓ ⁷⁾	✓
		✓ ¹⁾					✓ ⁷⁾	✓
	✓ ¹⁾						✓ ⁷⁾	✓
			✓ ¹⁾				✓ ⁷⁾	✓
	5)				5)		5)	5)
	✓ ⁶⁾				✓ ⁶⁾		✓ ⁶⁾	✓ ⁶⁾
	✓				✓		✓	✓
	✓				✓		✓	✓
	✓				✓		✓	✓
		✓		✓		✓	✓	✓
	✓				✓		✓	✓
		✓		✓		✓	✓	✓
		✓				✓	✓ ⁷⁾	✓
		5)				5)	5)	5)
		5)				5)	5)	5)
	5)	5)			5)	5)	5)	5)

	Seal rings			Flat gaskets for screw connections			Flange gaskets
	CIIR, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Fibre composite material	Fibre composite material
	✓ ⁵⁾			✓ ⁵⁾		✓	✓
		✓ ⁵⁾			✓ ⁵⁾	✓	✓
	✓					✓	✓
	✓			✓		✓	✓
	4)					4)	4)
			✓			✓	✓
			✓			✓	✓
			4)			4)	4)

Geberit Mapress Stainless Steel

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo

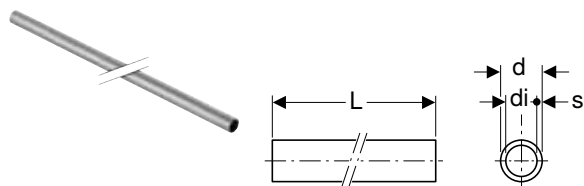

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.		DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 3 m									
39031	N	12	15	13	1	420	60		18.20
39032	N	15	18	16	1	210			21.74
39033	N	20	22	19.6	1.2	210			29.82
39034	N	25	28	25.6	1.2	90			36.13
39035	N	32	35	32	1.5	90			53.81
39036	N	40	42	39	1.5	90			63.89
39037	N	50	54	51	1.5	90			82.46
39038	N	65	76.1	72.1	2	72			170.51
39039	N	80	88.9	84.9	2	48			193.61
39040	N	100	108	104	2	39			249.11
L / length: 6 m									
39002		12	15	13	1	840	120		14.14
39003		15	18	16	1	420	60		16.69
39004		20	22	19.6	1.2	420	60		22.57
39005		25	28	25.6	1.2	180	60		27.82
39006		32	35	32	1.5	180	30		40.99
39007		40	42	39	1.5	180	30		50.41
39008		50	54	51	1.5	180	30		64.16
39009		65	76.1	72.1	2	144		6	130.02
39010		80	88.9	84.9	2	96		6	148.13
39011		100	108	104	2	78		6	178.41

N: New, available as of April 2025


Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339



Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	4.10
32051	15	18	16	1	5	5	1	4.44
32052	20	22	19.6	1.2	5.2	5	1	4.74
32053	25	28	25.6	1.2	5.6	5	1	6.05
32054	32	35	32	1.5	6.2		1	7.76
32055	40	42	39	1.5	8		1	10.99
32056	50	54	51	1.5	9		1	14.24
32057	65	76.1	72.1	2	13.6		1	58.69
32058	80	88.9	84.9	2	15		1	68.42
32059	100	108	104	2	18		1	95.77

Couplings

Geberit Mapress Stainless Steel coupling



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33001	10	12	4.2	0.8		100	10		9.76
32002	12	15	4.8	0.8		200	20		7.95
32003	15	18	4.8	0.8		200	20		8.57
32004	20	22	5	0.8		200	20		10.01
32005	25	28	5.4	0.8	4000	100	20		11.37
32006	32	35	6.2	1		100	5		14.04
32007	40	42	7.1	1.1	1440	48	4		19.21
32008	50	54	8.3	1.3	768	48	4		23.00
32009	65	76.1	12.7	2.1	320	20		1	113.97
32010	80	88.9	14.5	2.5	320	10		1	130.22
32011	100	108	17.6	2.6	160	10		1	165.47

Geberit Mapress Stainless Steel slip coupling



[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32102	12	15	2.5	8	3		50	10		13.31
32103	15	18	2.5	8	3		50	10		13.80
32104	20	22	2.5	8.4	3.4		50	10		15.73
32105	25	28	3	9.1	3.1		50	10		18.23
32106	32	35	3	10.2	4.2		50	5		20.35
32107	40	42	4	12	4		48	4		23.69
32108	50	54	4	14	6		40	4		30.26
32109	65	76.1	6	23	11			5	1	168.27
32110	80	88.9	7	26	12	160	5		1	189.99
32111	100	108	8	31	15	80	5		1	227.92

Reducers

Geberit Mapress Stainless Steel reducer with plain end


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33002	12 / 10	15	12	5.1	3.4		100	5		10.19
33003	15 / 10	18	12	5.3	3.6			5	1	10.40
32303	15 / 12	18	15	5.5	3.5		200	20		10.40
33004	20 / 10	22	12	6	4.3				1	9.71
32305	20 / 12	22	15	5.9	3.9		100	20		9.71
32306	20 / 15	22	18	5.7	3.7		200	20		9.71
32307	25 / 12	28	15	6.6	4.6		50	10		11.08
32308	25 / 15	28	18	6.4	4.4		50	10		11.08
32309	25 / 20	28	22	6	3.9		200	20		11.08
32310	32 / 12	35	15	7.5	5.5		25	5		18.75
32311	32 / 15	35	18	7.4	5.4		25	5		18.75
32312	32 / 20	35	22	7.1	5		50	5		18.75
32313	32 / 25	35	28	6.8	4.5	3200	100	5		18.75
32314	40 / 12	42	15	8.1	6.1			5	1	34.12
32315	40 / 15	42	18	8	6			5	1	34.12
32316	40 / 20	42	22	8.2	6.1		24	4		34.12
32317	40 / 25	42	28	8.3	6		48	4		34.12
32318	40 / 32	42	35	7.7	5.1		48	4		34.12
32319	50 / 12	54	15	9.7	7.7		5		1	47.75
32320	50 / 15	54	18	9.6	7.6			5	1	47.75
32321	50 / 20	54	22	9.5	7.4		24	4		47.75
32322	50 / 25	54	28	11	8.7		48	4		47.75
32323	50 / 32	54	35	10.6	8		48	4		47.75
32324	50 / 40	54	42	9.2	6.2		48	4		47.75
32331	65 / 50	76.1	54	14.6	11.1	400	25		1	102.37
32338	80 / 50	88.9	54	16.2	12.8	320	20		1	109.24
32339	80 / 65	88.9	76.1	16.1	10.8	320	20		1	109.24
32345	100 / 50	108	54	17.2	13.7		5		1	119.42
32346	100 / 65	108	76.1	18.4	13.1		5		1	119.42
32348	100 / 80	108	88.9	20.3	14.3	160	5		1	119.42

Bends

Geberit Mapress Stainless Steel bend

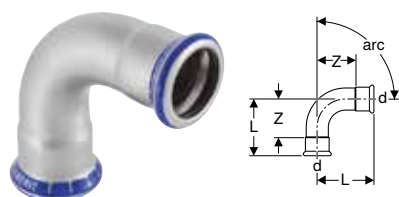
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°									
36101	12	15	3	1				1	11.91
36103	20	22	3.2	1.1			5	1	16.19
36104	25	28	3.6	1.3			5	1	20.46
36105	32	35	3.2	0.6			5	1	31.57
36106	40	42	3.7	0.7			5	1	49.47
36107	50	54	4.4	0.9			5	1	68.23
36108	65	76.1	7.5	2.2		5		1	170.64
36109	80	88.9	8.5	2.5				1	214.33
36110	100	108	10.3	2.8				1	293.05
arc / angle: 30°									
36121	12	15	3.3	1.3				1	11.91
36123	20	22	3.7	1.6		25	5		16.19
36124	25	28	4.1	1.8		25	5		20.46
36125	32	35	3.7	1.1		25		1	31.57
36126	40	42	4.4	1.4		25		1	49.47
36127	50	54	5.2	1.7		25		1	68.23
36128	65	76.1	8.8	3.5		5		1	170.64
36129	80	88.9	10.1	4.1		5		1	214.33
36130	100	108	12.2	4.7		5		1	293.05
arc / angle: 45°									
30602	12	15	2.8	0.8		200	20		11.91
30603	15	18	2.9	0.9	8000	200	20		13.32
30604	20	22	3.2	1.1		100	20		16.19
30605	25	28	3.7	1.4		100	10		20.46
32606	32	35	4.3	1.7		100	5		31.57
32607	40	42	5.1	2.1		48	4		49.47
32608	50	54	6.2	2.7	800	50	2		68.23
32609	65	76.1	10.3	5	320	10		1	170.64
32610	80	88.9	11.7	5.7	160	5		1	214.33
32611	100	108	14.3	6.8	80	5		1	293.05
arc / angle: 60°									
36161	12	15	4	2				1	11.91
36163	20	22	4.7	2.6			5	1	16.19
36164	25	28	5.4	3.1				1	20.46
36165	32	35	5	2.4				1	31.57
36166	40	42	5.9	2.9				1	49.47
36167	50	54	7.2	3.7			5	1	68.23
36168	65	76.1	11.7	6.4				1	170.64
36169	80	88.9	13.6	7.6				1	214.33
36170	100	108	16.6	9.1				1	293.05
arc / angle: 90°									
30102	12	15	3.8	1.8	8000	200	20		11.91
30103	15	18	4.2	2.2	6400	100	20		13.32
30104	20	22	4.7	2.6	4000	100	20		16.19
30105	25	28	5.7	3.4	2400	100	10		20.46
31106	32	35	6.8	4.2	1500	50	5		31.57
31107	40	42	8	5	800	50	2		49.47
31108	50	54	10	6.5	480	30	5		68.23
31109	65	76.1	15.7	10.4	160	10		1	170.64
31110	80	88.9	18.4	12.4	120	10		1	214.33
31111	100	108	22.6	15.1	60	5		1	293.05

Geberit Mapress Stainless Steel bend with plain end


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
36111	12	15	3	4	1				1	11.91
36113	20	22	3.3	4.1	1.2			5	1	16.19
36114	25	28	3.6	4.3	1.3			5	1	20.46
36115	32	35	3.2	4.1	0.6				1	31.57
36116	40	42	3.7	4.7	0.7				1	49.47
36117	50	54	4.4	5.5	0.9				1	68.23
36118	65	76.1	7.5	8.4	2.2				1	170.64
36119	80	88.9	8.5	9.5	2.5				1	214.33
36120	100	108	10.3	11.7	2.8				1	293.05
arc / angle: 30°										
36131	12	15	3.3	4.3	1.3			5	1	11.91
36133	20	22	3.7	4.6	1.6			5	1	16.19
36134	25	28	4.1	4.8	1.8			5	1	20.46
36135	32	35	3.7	4.6	1.1			5	1	31.57
36136	40	42	4.4	5.4	1.4			5	1	49.47
36137	50	54	5.2	6.3	1.7			5	1	68.23
36138	65	76.1	8.8	9.7	3.5				1	170.64
36139	80	88.9	10.1	11.1	4.1				1	214.33
36140	100	108	12.2	13.6	4.7				1	293.05
arc / angle: 45°										
30702	12	15	2.8	3.6	0.8		200	20		11.91
30703	15	18	2.9	3.6	0.9	8000	200	20		13.32
30704	20	22	3.2	4	1.1		100	20		16.19
30705	25	28	3.7	4.4	1.4		100	10		20.46
32706	32	35	4.3	5	1.7		100	5		31.57
32707	40	42	5.1	5.9	2.1		48	4		49.47
32708	50	54	6.2	7	2.7	960	24	2		68.23
32709	65	76.1	10.3	11.1	5		5		1	170.64
32710	80	88.9	11.7	12.8	5.7		5		1	214.33
32711	100	108	14.3	15.8	6.8	80	5		1	293.05
arc / angle: 60°										
36171	12	15	4	5	2			5	1	11.91
36173	20	22	4.7	5.6	2.6			5	1	16.19
36174	25	28	5.4	6.1	3.1			5	1	20.46
36175	32	35	5	5.9	2.4			5	1	31.57
36176	40	42	5.9	6.9	2.9			5	1	49.47
36177	50	54	7.2	8.3	3.7			5	1	68.23
36178	65	76.1	11.7	12.6	6.4				1	170.64
36179	80	88.9	13.6	14.6	7.6				1	214.33
36180	100	108	16.6	18	9.1				1	293.05
arc / angle: 90°										
30302	12	15	3.8	4.8	1.8		200	20		11.91
30303	15	18	4.2	5.1	2.2	8000	200	20		13.32
30304	20	22	4.7	5.8	2.6	4000	100	20		16.19
30305	25	28	5.7	6.3	3.4	3200	100	10		20.46
33306	32	35	6.8	7.4	4.2	2000	50	5		31.57
33307	40	42	8	8.8	5		40	2		49.47
33308	50	54	10	10.8	6.5	480	30	5		68.23
33309	65	76.1	15.9	16.7	10.6	250	5		1	170.64
33310	80	88.9	18.5	19.5	12.5	160	5		1	214.33
33311	100	108	22.6	24.1	15.5	60	5		1	293.05

Geberit Mapress Stainless Steel bend with plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
30892	12	15	4	11	0	7				1	14.17
30893	15	18	4	11.2	0	7.1				1	14.47
30894	20	22	4.1	11.4	0	7.3				1	15.32
30905	25	28	4.3	11.9	0	7.6			5	1	15.87
30906	32	35	4.1	11.8	0	7.7				1	33.26
30907	40	42	4.7	13.7	0	9				1	40.93
30908	50	54	5.5	14.9	0	9.4				1	51.19
30009	65	76.1	8.4	20.4	0	12				1	160.37
30010	80	88.9	9.5	22	0	12.5				1	180.87
30011	100	108	11.7	25.4	0	13.7				1	216.70
arc / angle: 30°											
30932	12	15	4.3	11.3	0	7				1	14.17
30933	15	18	4.4	11.6	0	7.1				1	14.47
30934	20	22	4.6	11.8	0	7.2			5	1	15.32
30935	25	28	4.8	12.4	0	7.6			5	1	15.87
30936	32	35	4.6	12.3	0	7.7				1	33.26
30937	40	42	5.4	14.4	0	9				1	40.93
30938	50	54	6.3	15.7	0	9.4				1	51.19
30029	65	76.1	9.7	21.7	0	12				1	160.37
30030	80	88.9	11.1	23.6	0	12.5				1	180.87
30031	100	108	13.6	27.3	0	13.7				1	216.70
arc / angle: 45°											
30872	12	15	4.5	11.6	0	7.1			5	1	14.17
30873	15	18	4.2	11.7	0	7.5				1	14.47
30874	20	22	5.2	12.3	0	7.1				1	15.32
30875	25	28	5.6	13.1	0	7.5				1	15.87
30876	32	35	5.3	12.9	0	7.6				1	33.26
30877	40	42	6.1	15.1	0	9				1	40.93
30878	50	54	7.3	16.7	0	9.4				1	51.19
30049	65	76.1	11.1	23	0	11.9				1	160.37
30050	80	88.9	13	25.2	0	12.2				1	180.87
30051	100	108	15.7	29.4	0	13.7				1	216.70
arc / angle: 60°											
30942	12	15	5	12	0	7				1	14.17
30943	15	18	5.3	12.4	0	7.1				1	14.47
30944	20	22	5.6	12.8	0	7.2				1	15.32
30955	25	28	6.1	13.7	0	7.6				1	15.87
30956	32	35	5.9	13.6	0	7.7				1	33.26
30957	40	42	6.9	15.9	0	9				1	40.93
30958	50	54	8.3	17.7	0	9.4				1	51.19
30069	65	76.1	12.6	24.6	0	12				1	160.37
30070	80	88.9	14.6	27.1	0	12.5				1	180.87
30071	100	108	18	31.7	0	13.7				1	216.70
arc / angle: 90°											
30402	12	15	5.9	12.9	0	7	5600	50	10		14.17
30403	15	18	6.1	13.3	0	7.2		50	10		14.47
30404	20	22	7	14.2	0	7.2		50	10		15.32
30405	25	28	7.9	15.5	0	7.6		50	10		15.87
30406	32	35	7.7	15.4	0	7.7			5	1	33.26
30407	40	42	9	18	0	9			5	1	40.93
30408	50	54	11.1	20.5	0	9.4			5	1	51.19
30089	65	76.1	16.6	28.6	0	12				1	160.37
30090	80	88.9	19.4	31.9	0	12.5				1	180.87
30091	100	108	24	37.7	0	13.7				1	216.70



Geberit Mapress Stainless Steel bend 90°, long



click & scan

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU1 [pc.]	GBP/pc.
30414	20	22	90	7	84	1.5	70	1	43.22
30415	25	28	90	8	85	1.7	77	1	46.31

Geberit Mapress Stainless Steel pipe bridge



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	30	6	16.5	3.2	25	5		12.21
30803	15	18	30	6	16.6	3.3	25	5		12.63
30804	20	22	30	6	16.8	3.5	25	5		14.33
30805	25	28	30	6	17.9	3.8			1	17.39

T-pieces

Geberit Mapress Stainless Steel T-piece, equal


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33008	10	12	90	5.6	3.5	2.8	1.1	1.8		50	10		17.58
31002	12	15	90	6.4	3.9	3.2	1.2	1.9		200	20		18.53
31003	15	18	90	6.8	4.1	3.4	1.4	2.1	5000	100	20		21.09
31004	20	22	90	7.4	4.4	3.7	1.6	2.3		100	20		22.68
31005	25	28	90	8.4	5	4.2	1.9	2.7	2000	50	10		26.65
31006	32	35	90	10	5.7	5	2.4	3.1		50	5		33.66
31007	40	42	90	11.4	6.5	5.7	2.7	3.5		48	4		47.78
31008	50	54	90	13.8	7.7	6.9	3.4	4.2		30	2		57.10
31009	65	76.1	90	23	11	11.5	6.2	5.7		5		1	314.58
31010	80	88.9	90	26	12.7	13	7	6.7	80	5		1	344.23
31011	100	108	90	31	15.3	15.5	8	7.8	60	5		1	424.86

Geberit Mapress Stainless Steel T-piece, reduced


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33005	12 / 10 / 12	15	12	15	90	6.4	3.5	3.2	3.2	1.2	1.8	1.2			5		18.69
33006	15 / 10 / 15	18	12	18	90	6.8	3.7	3.4	3.4	1.4	2	1.4				1	19.48
31208	15 / 12 / 12	18	15	15	90	7.9	4.1	3.4	4.5	1.4	2.1	2.5	25	5			19.48
31204	15 / 12 / 15	18	15	18	90	6.8	4.1	3.4	3.4	1.4	2.1	1.4	100	20			19.48
33007	20 / 10 / 20	22	12	22	90	7.4	3.9	3.7	3.7	1.6	2.3	1.6				1	19.82
31227	20 / 12 / 15	22	15	18	90	8.5	4.3	3.7	4.8	1.6	2.3	2.8			5	1	19.82
31206	20 / 12 / 20	22	15	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	100	20			19.82
31228	20 / 15 / 15	22	18	18	90	8.5	4.3	3.7	4.8	1.6	2.3	2.8			5	1	19.82
31207	20 / 15 / 20	22	18	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	100	20			19.82
31209	25 / 12 / 25	28	15	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9	100	10			24.74
31210	25 / 15 / 25	28	18	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9	100	10			24.74
31234	25 / 20 / 20	28	22	22	90	9	4.7	4.2	4.8	1.9	2.6	2.7	25	5			24.74
31211	25 / 20 / 25	28	22	28	90	8.4	4.7	4.2	4.2	1.9	2.6	1.9	100	10			24.74
31212	32 / 12 / 32	35	15	35	90	10	4.9	5	5	2.4	2.9	2.4	50	5			30.19



Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31213	32 / 15 / 32	35	18	35	90	10	4.9	5	5	2.4	2.9	2.4		50	5		30.19
31235	32 / 20 / 25	35	22	28	90	10.4	5	5	5.4	2.4	2.9	3.1			5	1	30.19
31214	32 / 20 / 32	35	22	35	90	10	5	5	5	2.4	2.9	2.4		50	5		30.19
31242	32 / 25 / 25	35	28	28	90	10.4	5.3	5	5.4	2.4	3	3.1			5	1	30.19
31215	32 / 25 / 32	35	28	35	90	10	5.3	5	5	2.4	3	2.4		50	5		30.19
31216	40 / 12 / 40	42	15	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7			5	1	44.34
31217	40 / 15 / 40	42	18	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		48	4		44.34
31243	40 / 20 / 32	42	22	35	90	11.5	5.4	5.7	5.8	2.7	3.3	3.2				1	44.34
31218	40 / 20 / 40	42	22	42	90	11.4	5.4	5.7	5.7	2.7	3.3	2.7		48	4		44.34
31251	40 / 25 / 32	42	28	35	90	11.5	5.7	5.7	5.8	2.7	3.4	3.2			5	1	44.34
31219	40 / 25 / 40	42	28	42	90	11.4	5.7	5.7	5.7	2.7	3.4	2.7		48	4		44.34
31220	40 / 32 / 40	42	35	42	90	11.4	6.1	5.7	5.7	2.7	3.5	2.7		48	4		44.34
31221	50 / 12 / 50	54	15	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4			5	1	51.19
31222	50 / 15 / 50	54	18	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4		20	5		51.19
31223	50 / 20 / 50	54	22	54	90	13.8	6	6.9	6.9	3.4	3.9	3.4		30	2		51.19
31224	50 / 25 / 50	54	28	54	90	13.8	6.3	6.9	6.9	3.4	4	3.4		30	2		51.19
31225	50 / 32 / 50	54	35	54	90	13.8	6.7	6.9	6.9	3.4	4.1	3.4		30	2		51.19
31226	50 / 40 / 50	54	42	54	90	13.8	7.1	6.9	6.9	3.4	4.1	3.4	320	20	5		51.19
31229	65 / 20 / 65	76.1	22	76.1	90	23	7.2	11.5	11.5	6.2	5.1	6.2	200	5		1	266.21
31230	65 / 25 / 65	76.1	28	76.1	90	23	7.5	11.5	11.5	6.2	5.2	6.2		5		1	266.21
31231	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2		5		1	266.21
31232	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2		5		1	266.21
31233	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2		5		1	266.21
31236	80 / 20 / 80	88.9	22	88.9	90	26	7.8	13	13	7	5.7	7		5		1	290.10
31237	80 / 25 / 80	88.9	28	88.9	90	26	8.1	13	13	7	5.8	7		5		1	290.10
31238	80 / 32 / 80	88.9	35	88.9	90	26	8.5	13	13	7	5.9	7		5		1	290.10
31239	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7		5		1	290.10
31240	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7	160	10		1	290.10
31241	80 / 65 / 80	88.9	76.1	88.9	90	26	11.6	13	13	7	6.3	7				1	290.10
31244	100 / 20 / 100	108	22	108	90	31	8.8	15.5	15.5	8	6.7	8				1	341.32
31245	100 / 25 / 100	108	28	108	90	31	9.1	15.5	15.5	8	6.8	8				1	341.32
31246	100 / 32 / 100	108	35	108	90	31	9.5	15.5	15.5	8	6.9	8	80	5		1	341.32
31247	100 / 40 / 100	108	42	108	90	31	9.9	15.5	15.5	8	6.9	8				1	341.32
31248	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8	80	5		1	341.32
31249	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8	60	5		1	341.32
31250	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8				1	341.32

Geberit Mapress Stainless Steel T-piece with male thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	d1, ø [mm]	arc [°]	L [cm]	I [cm]	I1 [cm]	H [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31401	12 / 10 / 12	15	3/8	15	90	6.4	3.2	3.2	5	1.2	1.2	10	1	26.91
31454	12 / 15 / 12	15	1/2	15	90	6.4	3.2	3.2	4	1.2	1.2	5	1	20.46
31455	15	18	1/2	18	90	6.8	3.4	3.4	4.2	1.4	1.4	5	1	20.46
31458	20	22	3/4	22	90	7.4	3.7	3.7	4.8	1.6	1.6	5	1	23.87
31461	25	28	1	28	90	8.4	4.2	4.2	5.4	1.9	1.9	5	1	27.28
31464	32	35	1 1/4	35	90	10	5	5	6	2.4	2.4	5	1	32.43

Geberit Mapress Stainless Steel T-piece with female thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31304	12 / 15 / 12	15	1/2	15	90	6.4	4	3.2	3.2	1.2	2.7	1.2		100	10		20.46
31305	15	18	1/2	18	90	6.8	4.1	3.4	3.4	1.4	2.9	1.4		100	10		20.46
31306	15 / 20 / 15	18	3/4	18	90	6.8	4.4	3.4	3.4	1.4	2.9	1.4			5		20.46
31307	20 / 15 / 20	22	1/2	22	90	7.4	4.3	3.7	3.7	1.6	3	1.6		100	20		23.87
31308	20	22	3/4	22	90	7.4	4.6	3.7	3.7	1.6	3.1	1.6		50	10		23.87
31309	25 / 15 / 25	28	1/2	28	90	8.4	4.6	4.2	4.2	1.9	3.3	1.9		50	10		27.28
31310	25 / 20 / 25	28	3/4	28	90	8.4	4.9	4.2	4.2	1.9	3.4	1.9		50	10		27.28
31311	25	28	1	28	90	8.4	5.3	4.2	4.2	1.9	3.6	1.9			5	1	27.28
31312	32 / 15 / 32	35	1/2	35	90	10	5	5	5	2.4	3.7	2.4		50	5		32.43
31313	32 / 20 / 32	35	3/4	35	90	10	5.3	5	5	2.4	3.8	2.4		50	5		32.43
31316	40 / 15 / 40	42	1/2	42	90	11.4	5.3	5.7	5.7	2.7	4	2.7		48	4		36.70
31317	40 / 20 / 40	42	3/4	42	90	11.4	5.6	5.7	5.7	2.7	4.1	2.7		24	4		36.70
31320	50 / 15 / 50	54	1/2	54	90	13.8	5.9	6.9	6.9	3.4	4.6	3.4	480	30	2		46.06
31321	50 / 20 / 50	54	3/4	54	90	13.8	6.2	6.9	6.9	3.4	4.7	3.4		20	2		46.06
31324	50	54	2	54	90	13.8	7.9	6.9	6.9	3.4	5.6	3.4		20		1	46.06
31326	65 / 20 / 65	76.1	3/4	76.1	90	23	7.4	11.5	11.5	6.2	5.9	6.2	250	5		1	272.99
31329	65 / 50 / 65	76.1	2	76.1	90	23	9.1	11.5	11.5	6.2	6.8	6.2	200	5		1	272.99
31331	80 / 20 / 80	88.9	3/4	88.9	90	26	8	13	13	7	6.5	7		5		1	290.10
31334	80 / 50 / 80	88.9	2	88.9	90	26	9.7	13	13	7	7.4	7		5		1	290.10
31336	100 / 20 / 100	108	3/4	108	90	31	9	15.5	15.5	8	7.5	8	80	5		1	341.32
31339	100 / 50 / 100	108	2	108	90	31	10.7	15.5	15.5	8	8.4	8				1	341.32

Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with weld-on and plain end



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For welding on stainless steel pipes according to EN ISO 1127, material no. 1.4404
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s [mm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32412	12	15	17.2	1	4.5	3.4	5	1	37.54
32413	15	18	21.3	1	5	3.7	5	1	37.54
32414	20	22	26.9	1.2	5.5	3.9	5	1	39.77
32415	25	28	33.7	1.2	5.5	3.9	5	1	41.97
32416	32	35	42.4	1.5	6.5	4.4	5	1	44.18



Art. no.	DN	d, ø [mm]	d1, ø [mm]	s [mm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32417	40	42	48.3	1.5	7.5	5.4	4	1	46.38
32418	50	54	60.3	1.5	8	5.8	4	1	50.80
32419	65	76.1	76.1	2	12			1	66.27
32420	80	88.9	88.9	2	13.5			1	71.11
32421	100	108	114.3	2	15	12.8		1	83.95

Geberit FlowFit adaptor to Geberit Mapress, with plain end, stainless steel



click & scan

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.250.00.1	12	16	15	7.1	3.8	10	1	18.53
620.251.00.1	15	20	18	7.1	3.8	10	1	21.81
620.252.00.1	15 / 20	20	22	7.2	3.9	10	1	21.81
620.253.00.1	20	25	22	7.2	3.9	10	1	27.24
620.254.00.1	25	32	28	7.9	4.3	10	1	35.49
620.255.00.1	32	40	35	8.2	4.6	10	1	47.99
620.256.00.1	40	50	42	12.5	6.6	5	1	81.80
620.257.00.1	50	63	54	14.2	7.9	5	1	106.37

Geberit FlowFit adaptor to Geberit Mapress, with plain end



click & scan

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01
620.232.00.1	20	25	22	7	3.7	25	5		13.91
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93
620.234.00.1	32	40	35	8	4.4	25	5		22.24
620.235.00.1	40	50	42	12.8	6.9	10		1	50.07
620.236.00.1	50	63	54	13.8	7.5	5		1	77.86

Geberit FlowFit adaptor to Geberit Mapress, with pressing socket, stainless steel

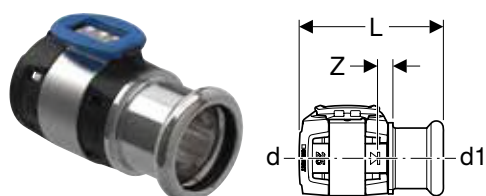
[click & scan](#)

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.329.00.1	12 / 10	16	12	5.4	0.6	10	1	18.53
620.332.00.1	12	16	15	5.6	0.6	10	1	18.53
620.347.00.1	15 / 12	20	15	5.6	0.6	10	1	21.81
620.333.00.1	15	20	18	5.6	0.6	10	1	21.81
620.334.00.1	15 / 20	20	22	5.7	0.6	10	1	21.81
620.335.00.1	20	25	22	5.7	0.6	10	1	27.24
620.336.00.1	25	32	28	6.4	0.8	10	1	35.49
620.337.00.1	32	40	35	6.7	0.8	10	1	47.99
620.338.00.1	40	50	42	9.7	1.1	5	1	81.80
620.339.00.1	50	63	54	10.7	1.2	5	1	106.37

Geberit Mapress Stainless Steel adaptor with male thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33009	10 / 15	12	1/2	3.6	1.9		25	5		16.45
31726	12 / 10	15	3/8	3.8	1.8		50	5		15.32
31703	12 / 15	15	1/2	4.1	2.1	6400	200	20		15.32
31714	12 / 20	15	3/4	4.3	2.3		50	10		15.32
31704	15	18	1/2	4.2	2.2	6400	200	20		17.02
31705	15 / 20	18	3/4	4.4	2.4		100	20		17.02
31715	20 / 15	22	1/2	4.2	2.1		100	20		18.75
31707	20	22	3/4	4.4	2.3	6400	100	20		18.75
31716	20 / 25	22	1	4.6	2.5		100	10		18.75
31717	25 / 20	28	3/4	4.6	2.3		100	20		23.87
31708	25	28	1	4.8	2.3	4000	100	20		23.87
31718	25 / 32	28	1 1/4	4.8	2.5		50	10		23.87
31719	32 / 25	35	1	5.1	2.5		50	5		34.12
31709	32	35	1 1/4	5.3	2.7		50	5		34.12
31720	32 / 40	35	1 1/2	5.3	2.7		25	5		34.12
31721	40 / 32	42	1 1/4	5.7	2.7		48	4		50.48
31710	40	42	1 1/2	5.7	2.7	1920	48	4		50.48
31722	50 / 40	54	1 1/2	8.3	4.8		25		1	68.23
31711	50	54	2	8.9	5.4	1000	25		1	68.23
31713	65	76.1	2 1/2	11.9	7		5		1	310.27
31724	80	88.9	3	13.7	7.7		5		1	465.55



Geberit Mapress Stainless Steel adaptor with male thread G


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31731	12	15	3/4	3.5	1.5		1	30.25
31732	15	18	3/4	3.8	1.7		1	34.87
31733	20	22	1	4	1.9		1	46.34
31738	25	28	1	4.1	2.1		1	78.56
31734	25	28	1 1/4	4.1	1.8		1	83.19
31735	32	35	1 1/2	4.7	2.1	5	1	85.82
31736	40	42	1 3/4	5.2	2.2		1	125.55
31737	50	54	2 3/8	6.3	2.8		1	223.53

Geberit Mapress Stainless Steel adaptor with male thread and plain end


[click & scan](#)

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12 / 15	15	1/2	5.7	25	5		15.32
31933	15	18	1/2	5.7	25	5		17.02
31936	20	22	3/4	5.9	25	5		18.75
31937	25	28	1	6.6	25	5		23.87
31938	32	35	1 1/4	8		5	1	34.12
31939	40	42	1 1/2	9.1		5	1	50.48
31940	50	54	2	10.2		5	1	68.23

Geberit Mapress Stainless Steel adaptor with female thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33010	10 / 15	12	1/2	3.4	0.4			5	1	17.81
31801	12 / 10	15	3/8	3.5	0.5				5	15.32
31802	12 / 15	15	1/2	3.7	0.4		200	20		15.32
31823	12 / 20	15	3/4	3.8	0.3		50	5		15.32
31803	15	18	1/2	3.7	0.4	8000	100	20		17.02
31804	15 / 20	18	3/4	3.8	0.3		50	10		17.02
31805	20 / 15	22	1/2	3.6	0.2		100	20		18.75
31806	20	22	3/4	3.9	0.3		100	20		18.75
31824	20 / 25	22	1	4.2	0.4		50	10		18.75
31807	25 / 15	28	1/2	3.8	0.2		50	5		23.87
31819	25 / 20	28	3/4	3.9	0.3		50	10		23.87
31809	25	28	1	4.4	0.4		50	10		23.87
31825	25 / 32	28	1 1/4	4.6	0.4		25	5		23.87
31820	32 / 25	35	1	4.5	0.2		50	5		34.12
31811	32	35	1 1/4	4.9	0.4		50	5		34.12
31826	32 / 40	35	1 1/2	4.9	0.4		25	5		34.12
31821	40 / 32	42	1 1/4	5.1	0.2		48	4		50.48
31814	40	42	1 1/2	5.3	0.4		48	4		50.48
31822	50 / 40	54	1 1/2	7.7	2.1		25		1	68.23
31818	50	54	2	6.2	0.4		25		1	68.23

Geberit Mapress Stainless Steel adaptor with female thread and plain end


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	5.8	4.5	5		1	21.70
33848	25 / 15	28	1/2	6.6	5.3		5	1	28.28
33850	32 / 15	35	1/2	6.9	5.6			1	37.47
33852	40 / 15	42	1/2	7.4	6.1		5	1	48.01
33854	50 / 15	54	1/2	7.9	6.6		5	1	57.20
33860	65 / 15	76.1	1/2	10.4	9.1			1	199.87
33862	80 / 15	88.9	1/2	11.3	10			1	284.02
33864	100 / 15	108	1/2	13.4	12.1			1	342.50



Geberit Mapress Stainless Steel adaptor with female thread and plain end, long


[click & scan](#)

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12 / 15	15	1/2	14.8	13.5	9	5	1	15.32
90933	15	18	1/2	14.8	13.5	9	5	1	17.02
90934	15 / 20	18	3/4	15.2	13.3	9		1	17.02
90935	20 / 15	22	1/2	14.8	13.9	8.9	5		18.75
90936	20	22	3/4	15.2	13.7	8.7	5	1	18.75

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33833	12 / 15	15	1/2	90	5.7	3.7	3.7	50	10		22.19
33834	15	18	1/2	90	5.7	3.9	3.7	50	10		23.87
33835	20	22	3/4	90	6	4.6	3.9	50	10		30.72
33836	25	28	1	90	6.7	5.4	4.4	50	5		39.26
33837	32	35	1 1/4	90	7.5	6.3	4.9		5	1	52.91
33838	40	42	1 1/2	90	8.3	6.7	5.3		5	1	92.35
33839	50	54	2	90	9.4	7.8	5.9		5	1	117.91

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread

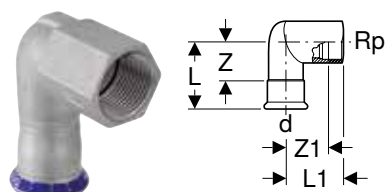
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Technical data												
Product material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	d, Ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33802	12 / 10	15	3/8	90	5.7	3.4	3.7	2.4			1	21.03
33803	12 / 15	15	1/2	90	5.7	3.7	3.7	2.4	100	20		21.32
33804	15	18	1/2	90	5.7	3.9	3.7	2.6	50	10		26.67
33808	20 / 15	22	1/2	90	5.8	3.9	3.7	2.4	50	10		30.81
33810	20 / 15	22	1/2	90	5.8	4.9	3.7	3	50	10		29.11
33805	20	22	3/4	90	6	4.6	3.9	3.1	50	10		30.72
33806	25	28	1	90	6.7	5.4	4.3	3.7	40	10		39.26
33807	32	35	1 1/4	90	7.5	6.3	4.9	4.4	25	5		52.91

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Technical data									
Product material		CrNiMo steel 1.4401 (EN 10088)							
L	H	Z			SU3	SU2	GBP/pc.		
[cm]	[cm]	[cm]			[pc.]	[pc.]			
3.6	5.3	2.3			25	5	21.32		


Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100



Adaptors and connections, detachable

Geberit Mapress adaptor with MasterFix

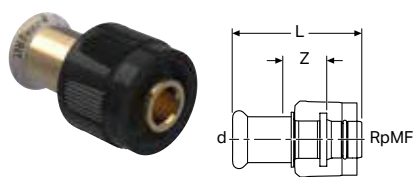
[click & scan](#)

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61110	12 / 15	15	1/2	5.4	1.8	50	5	31.02

Geberit Mapress adaptor with MasterFix and plain end

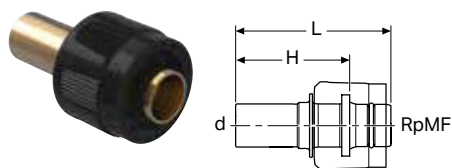
[click & scan](#)

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61112	12 / 15	15	1/2	5.6	4	30	5	41.60

Geberit Mapress elbow adaptor 90° with MasterFix

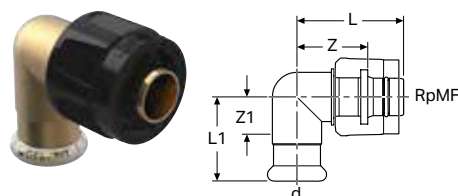

click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61120	12 / 15	15	1/2	90	4.4	3.3	2.8	1.4	50	5	54.14

Geberit Mapress elbow adaptor 90° with MasterFix and plain end

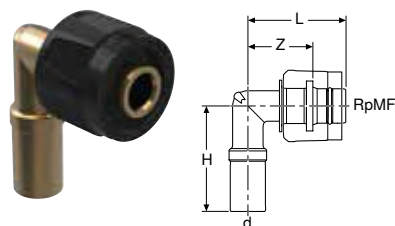

click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- O-ring made of EPDM
- MasterFix with blue protective cap


Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61121	12 / 15	15	1/2	90	4.4	4.5	2.8	30	5	56.77



Geberit Mapress Stainless Steel union


[click & scan](#)

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35320	12	15	3/4	6.6	2.6		5	1	52.48
35321	15	18	3/4	6.9	2.9		5	1	59.47
35322	20	22	1	7.2	3	10		1	73.74
35323	25	28	1 1/4	7.7	3.1	10		1	113.25
35324	32	35	1 1/2	8.2	3		5	1	118.76
35325	40	42	1 3/4	9.5	3.5		5	1	171.13
35326	50	54	2 3/8	11.3	4.3		5	1	284.21

Geberit Mapress Stainless Steel union with union nut made of CrNi steel


[click & scan](#)

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
35390	12	15	3/4	6.6	2.6	1	64.79
35391	15	18	3/4	6.9	2.9	1	73.79
35392	20	22	1	7.2	3	1	91.32
35393	25	28	1 1/4	7.7	3.1	1	139.85
35394	32	35	1 1/2	8.2	3	1	146.25
35395	40	42	1 3/4	9.5	3.5	1	210.57
35396	50	54	2 3/8	11.3	4.3	1	349.47

Geberit Mapress Stainless Steel adaptor with union nut

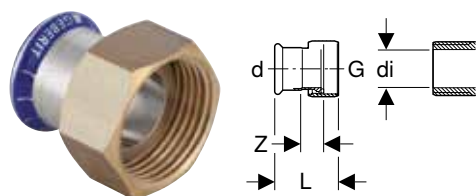

click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	G ["]	di, Ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35042	12	15	1/2	10	5.1	2.5	50	5		23.87
35032	12 / 20	15	3/4	13	3.7	1.1	50	10		18.75
35033	15 / 20	18	3/4	13	3.7	1.1	50	10		19.59
35034	20 / 25	22	1	20	4	1.1	100	10		27.28
35044	20	22	1 1/4	26	4.3	1.3		5	1	27.28
35045	20	22	1 1/2	32	4.4	1.3		5	1	27.28
35046	25	28	1	20	5.5	2.4	50	5		35.82
35035	25 / 32	28	1 1/4	26	4.4	1.3	50	10		35.82
35047	25 / 40	28	1 1/2	32	4.6	1.3		5	1	35.82
35036	32 / 40	35	1 1/2	32	4.8	1.3	50	5		39.26
35037	40	42	1 3/4	39	5.2	1.3	48	4		52.25
35038	50 / 60	54	2 3/8	51	5.8	1.5	25		1	70.53
35039	65 / 80	76.1	3	73	9.9	3.3			1	290.10
35040	80 / 90	88.9	3 1/2	84	11.1	3.7			1	375.42

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel

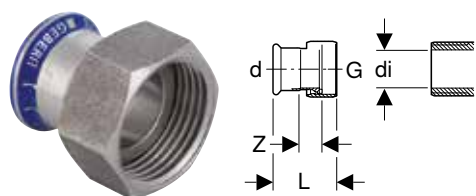

click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug


Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	G ["]	di, Ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35132	12	15	3/4	13	3.7	1.1	25	5		24.22
35134	20	22	1	20	4	1.1		5	1	30.22
35075	25	28	1 1/2	32	4.4	1.3		5	1	68.95



Geberit Mapress Stainless Steel adaptor union with male thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35330	12 / 15	15	1/2	3/4	6.4	4.4	50	2		27.28
35331	12 / 20	15	3/4	3/4	6.6	4.6		5	1	27.28
35332	15	18	1/2	3/4	6.4	4.4	50	5		29.50
35333	15 / 20	18	3/4	3/4	6.6	4.6	20	2		29.50
35334	20 / 15	22	1/2	1	6.7	4.6	20	2		30.72
35335	20	22	3/4	1	6.8	4.7	20	2		30.72
35336	20 / 25	22	1	1	7.3	5.2	20	2		30.72
35337	25	28	1	1 1/4	7.8	5.5	20	2		51.19
35338	32	35	1 1/4	1 1/2	8.5	5.9	20	2		66.54
35339	40	42	1 1/2	1 3/4	9	6	25		1	76.63
35340	50	54	2	2 3/8	10.3	6.8	15		1	133.09

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35360	12 / 15	15	1/2	3/4	6.4	4.4	50	2		35.82
35361	12 / 20	15	3/4	3/4	6.6	4.6			1	35.82
35362	15	18	1/2	3/4	6.4	4.4	50	2		40.93
35363	15 / 20	18	3/4	3/4	6.6	4.6		5	1	40.93
35364	20 / 15	22	1/2	1	6.7	4.6		5	1	42.64
35365	20	22	3/4	1	6.8	4.7	50	2		42.64
35366	20 / 25	22	1	1	7.3	5.2			1	42.64
35367	25	28	1	1 1/4	7.8	5.5	30	2		64.82
35368	32	35	1 1/4	1 1/2	8.5	5.9	20	2		86.66
35369	40	42	1 1/2	1 3/4	9	6	20		1	100.26
35370	50	54	2	2 3/8	10.3	6.8	15		1	173.28

Geberit Mapress Stainless Steel adaptor union with male thread and plain end


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35400	12 / 15	15	1/2	3/4	8.6		1	35.82
35402	15	18	1/2	3/4	8.6		1	40.93
35405	20	22	3/4	1	9.2		1	42.64
35407	25	28	1	1 1/4	10.1	5	1	64.82
35408	32	35	1 1/4	1 1/2	10.9		1	86.66
35409	40	42	1 1/2	1 3/4	11.5		1	100.26
35410	50	54	2	2 3/8	12.9		1	173.28

Geberit Mapress Stainless Steel adaptor union with female thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug


Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35300	12 / 15	15	1/2	3/4	5.9	2.6	25	5		27.28
35301	12 / 20	15	3/4	3/4	6.1	2.6			1	27.28
35302	15	18	1/2	3/4	5.9	2.6	25	5		29.50
35303	15 / 20	18	3/4	3/4	6.1	2.6		5	1	29.50
35304	20	22	3/4	1	6.3	2.7	50	2		30.72
35305	20 / 25	22	1	1	6.6	2.8	25	5		30.72
35306	25	28	1	1 1/4	7.1	3.1	30	2		51.19
35307	32	35	1 1/4	1 1/2	7.7	3.2	20	2		66.54
35308	40	42	1 1/2	1 3/4	8.2	3.3	25		1	76.63
35309	50	54	2	2 3/8	9.5	3.7		5	1	133.09



Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35350	12 / 15	15	1/2	3/4	5.9	2.6	5	1	35.82
35357	12 / 20	15	3/4	3/4	6.1	2.6		1	35.82
35351	15	18	1/2	3/4	5.9	2.6	5	1	40.93
35358	15 / 20	18	3/4	3/4	6.1	2.6		1	40.93
35352	20	22	3/4	1	6.3	2.7	5	1	42.64
35359	20 / 25	22	1	1	6.6	2.8		1	42.64
35353	25	28	1	1 1/4	7.1	3.1	5	1	64.82
35354	32	35	1 1/4	1 1/2	7.7	3.2	5	1	86.66
35355	40	42	1 1/2	1 3/4	8.2	3.3	5	1	100.26
35356	50	54	2	2 3/8	9.5	3.7		1	173.28

Geberit Mapress Stainless Steel adaptor union with female thread and plain end


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35380	12 / 15	15	1/2	3/4	8.1	5.9		1	35.82
35382	15	18	1/2	3/4	8.1	5.9		1	40.93
35384	20	22	3/4	1	8.7	6.4		1	42.64
35386	25	28	1	1 1/4	9.4	6.7		1	64.82
35387	32	35	1 1/4	1 1/2	10.1	7.2		1	86.66
35388	40	42	1 1/2	1 3/4	10.7	7.7	5	1	100.26
35389	50	54	2	2 3/8	12	8.4		1	173.28

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end


[click & scan](#)

Application purposes

- Suitable exclusively for liquid media

Characteristics

- Not admissible for drinking water installations

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	20.11
22431	12	20	15	6.7	5.2	10	2	23.45
22422	15	16	18	6.4	4.9	10	2	21.81
22432	15	20	18	6.7	5.2	10	2	25.15
22423	20	16	22	6.8	5.9	10	2	23.45
22433	20	20	22	6.8	5.9	10	2	26.80
22444	25	25	28	6.8	5.9	10	2	36.85



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket

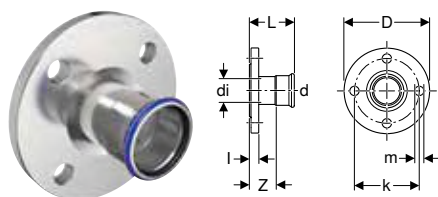
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33732	15 / 12	15	15	9.5	65	14	6.1	1.6	4.1	4	10 / 16	1	1	62.29
33733	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16	1	1	64.00
33734	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16	1	1	75.69
33735	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16	1	1	92.54
33736	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16	1	1	130.69
33737	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16	1	1	153.28
33738	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	1	1	189.04
33739	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	298.59
33740	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	354.82
33741	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	421.22

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104



Geberit Mapress Stainless Steel flange PN 10/16, with plain end

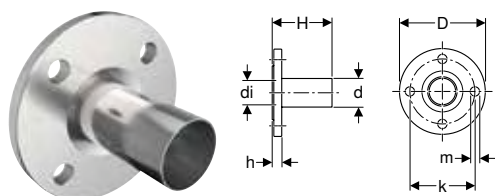
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	72.08
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	88.13
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	124.45
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	145.99
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	72	1	257.45
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	294.73
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	345.01
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	413.34

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6

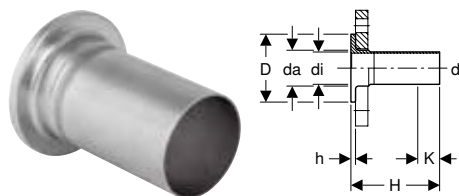
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	3.7	6		1	93.66
36151	32	35	40	32	7	13.5	0.6	2.7	6		1	134.82
36152	40	42	47	39	8	13.5	0.6	0	6		1	157.33
36153	50	54	59	51	9	13.5	0.8	0	6		1	194.78
36154	65	76.1	78	73.1	11	13.5	0.8	0	6		1	307.14
36155	80	88.9	91	84.9	12.8	13.5	1	0	6	96	1	359.58
36156	100	108	110	104	14.8	13.5	1	0	6	75	1	430.79


To order additionally

- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 6 → p. 104

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	87.11
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	106.23
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	153.44
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	178.46
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16		1	220.94
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	348.42
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	407.91
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	488.62

To order additionally


- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Therm
- Suitable exclusively for liquid media

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating pressure	≤ 16 bar
Operating temperature	-30 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	D [cm]	La [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33932	12	15	2.6	7	15.1	11.1			1	137.46
33933	15	18	2.6	7	14.7	10.7			1	145.18
33934	20	22	3.1	11	10.6	6.4			1	167.67
33935	25	28	3.9	13	12	7.4	5		1	181.08
33936	32	35	4.6	13	13.9	8.7		5	1	203.55
33937	40	42	5.9	13	14.9	8.9			1	365.64
33938	50	54	7	18	17.6	10.6			1	416.57
33939	65	76.1	8.8	22	26.2	15.6			1	517.78
33940	80	88.9	11.7	23	28.6	16.6			1	582.20
33941	100	108	14.4	23	54.2	39.2			1	1182.77



Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	I [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	71.71
90981	15	18	3	45	16.5		1	73.46
90982	20	22	3.4	45	16.5		1	77.06
90983	25	28	3.8	45	16.5		1	84.22
90984	32	35	4.5	45	16.5		1	102.13
90985	40	42	5.4	45	16.5		1	121.85
90986	50	54	7	45	16.5		1	134.42
90987	65	76.1	8.9	45	16.5		1	304.60
90988	80	88.9	10.8	45	16.5		1	340.49
90989	100	108	13.3	45	16.5		1	376.32

Sealings

Geberit Mapress Stainless Steel cap



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33212	12	15	2.3	0.3	50	10		13.40
33213	15	18	2.3	0.3	50	5		16.10
33214	20	22	2.4	0.3	50	5		17.42
33215	25	28	2.6	0.3	50	5		20.94
33216	32	35	2.9	0.3	50	5		29.25
33217	40	42	3.3	0.3	25		1	63.73
33218	50	54	3.8	0.3	25		1	70.09
33219	65	76.1	6	0.7			1	89.20
33220	80	88.9	6.7	0.7			1	108.63
33221	100	108	8.2	0.7			1	150.48

Connections

Geberit Mapress Stainless Steel elbow tap connector 90°



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm												
33013	10 / 15	12	1/2	90	4.6	1.3	1.5	2.9		5	1	26.72
33403	12 / 15	15	1/2	90	5	1.3	1.5	3	100	20		26.39
33405	15	18	1/2	90	5	1.3	1.5	3	100	20		28.41
L1 / length: 5.1 cm												
33407	20	22	3/4	90	5.4	1.7	1.6	3.3	50	10		40.84

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset

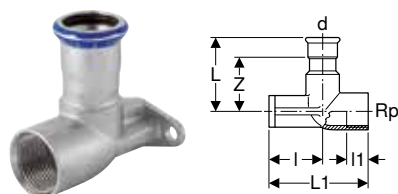

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 6.5 cm											
33423	12 / 15	15	1/2	90	5	3.5	1.5	3	50	10	26.12
33425	15	18	1/2	90	5	3.5	1.5	3	50	10	28.20
33427	20	22	3/4	90	5.4	3.1	1.6	3.3	25	5	40.42



Geberit Mapress Stainless Steel corner elbow 90°



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 4.3 cm												
33503	12 / 15 / 12	15	1/2	15	90	6	1.3	1.5	4	50	5	40.52
33504	N 15 / 15 / 15	18	1/2	18	90	6	1.3	1.5	4	50	5	84.64
33505	N 20 / 15 / 20	22	1/2	22	90	6	1.3	1.5	4		5	107.48
L1 / length: 6.2 cm												
33510	15 / 15 / 15	18	1/2	18	90	6	1.3	1.5	4		5	50.95
33520	20 / 15 / 20	22	1/2	22	90	6	1.3	1.5	4		5	64.73

N: New, available as of January 2025

Geberit Mapress Stainless Steel, gas

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo, plastic-jacketed (gas)

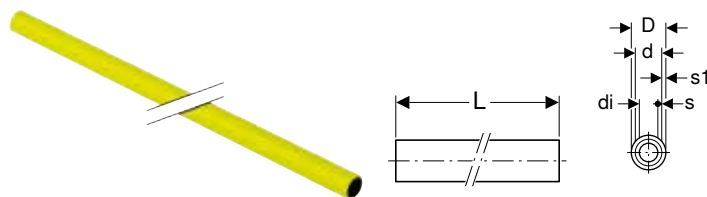

click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Plastic jacketing made of PP, yellow
- Protected against external chemical and electrochemical factors

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s1 [mm]	s [mm]	L [m]	SU3 [m]	GBP/m
39112	12	15	13	1.7	0.9	1	6	60	18.10
39113	15	18	16	2	0.9	1	6	60	21.96
39114	20	22	19.6	2.4	0.9	1.2	6	60	30.13
39115	25	28	25.6	3	0.9	1.2	6	60	36.42
39116	32	35	32	3.7	0.9	1.5	6	30	54.40
39117	40	42	39	4.4	0.9	1.5	6	30	64.69
39118	50	54	51	5.6	0.9	1.5	6	30	83.32

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress stripping tool → p. 339
- Geberit Mapress stripping tool → p. 339
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

Geberit Mapress Stainless Steel system pipe CrNiMo

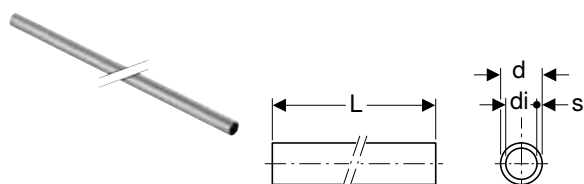

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)



Art. no.		DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 3 m									
39031	N	12	15	13	1	420	60		18.20
39032	N	15	18	16	1	210			21.74
39033	N	20	22	19.6	1.2	210			29.82
39034	N	25	28	25.6	1.2	90			36.13
39035	N	32	35	32	1.5	90			53.81
39036	N	40	42	39	1.5	90			63.89
39037	N	50	54	51	1.5	90			82.46
39038	N	65	76.1	72.1	2	72			170.51
39039	N	80	88.9	84.9	2	48			193.61
39040	N	100	108	104	2	39			249.11
L / length: 6 m									
39002		12	15	13	1	840	120		14.14
39003		15	18	16	1	420	60		16.69
39004		20	22	19.6	1.2	420	60		22.57
39005		25	28	25.6	1.2	180	60		27.82
39006		32	35	32	1.5	180	30		40.99
39007		40	42	39	1.5	180	30		50.41
39008		50	54	51	1.5	180	30		64.16
39009		65	76.1	72.1	2	144		6	130.02
39010		80	88.9	84.9	2	96		6	148.13
39011		100	108	104	2	78		6	178.41


N: New, available as of April 2025

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	4.10
32051	15	18	16	1	5	5	1	4.44
32052	20	22	19.6	1.2	5.2	5	1	4.74
32053	25	28	25.6	1.2	5.6	5	1	6.05
32054	32	35	32	1.5	6.2		1	7.76
32055	40	42	39	1.5	8		1	10.99
32056	50	54	51	1.5	9		1	14.24
32057	65	76.1	72.1	2	13.6		1	58.69
32058	80	88.9	84.9	2	15		1	68.42
32059	100	108	104	2	18		1	95.77

Couplings

Geberit Mapress Stainless Steel coupling (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34101	12	15	4.8	0.8		50	5		9.09
34102	15	18	4.8	0.8		25	5		9.79
34103	20	22	5	0.8		50	5		11.44
34104	25	28	5.4	0.8		50	5		12.98
34105	32	35	6.2	1		50	5		16.04
34106	40	42	7.1	1.1		24	4		21.90
34107	50	54	8.3	1.3		50	5		26.31
34248	65	76.1	12.7	2.1	320	20		1	130.09
34249	80	88.9	14.5	2.5		5		1	148.71
34250	100	108	17.6	2.6		5		1	188.91

Geberit Mapress Stainless Steel slip coupling (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34108	12	15	2.5	8	3		1	15.12
34109	15	18	2.5	8	3		1	15.74
34110	20	22	2.5	8.4	3.4	5		17.97
34111	25	28	3	9.1	3.1	5	1	20.81
34112	32	35	3	10.2	4.2		1	23.26
34113	40	42	4	12	4		1	27.05
34114	50	54	4	14	6		1	34.55
34162	65	76.1	6	23	11		1	122.01
34121	80	88.9	7	26	12		1	200.23
34122	100	108	8	31	15		1	260.20



Reducers

Geberit Mapress Stainless Steel reducer with plain end (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Concentric
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34115	15 / 12	18	15	5.5	3.5		5	1	10.08
34116	20 / 12	22	15	5.9	3.9		5	1	11.10
34117	20 / 15	22	18	5.7	3.7	25	5		11.10
34118	25 / 12	28	15	6.6	4.6			1	12.63
34119	25 / 15	28	18	6.4	4.4		5	1	12.63
34120	25 / 20	28	22	6	3.9	50	5		12.63
34123	32 / 20	35	22	7.1	5		5	1	21.42
34124	32 / 25	35	28	6.8	4.5	25	5		21.42
34127	40 / 20	42	22	8.2	6.1			1	21.67
34128	40 / 25	42	28	8.3	6		5	1	37.14
34129	40 / 32	42	35	7.7	5.1		5	1	37.14
34132	50 / 20	54	22	9.5	7.4			1	34.34
34133	50 / 25	54	28	11	8.7		5	1	54.53
34134	50 / 32	54	35	10.6	8		5	1	54.53
34135	50 / 40	54	42	9.2	6.2		5	1	54.53
34296	65 / 50	76.1	54	14.6	11.1	5		1	116.87
34297	80 / 50	88.9	54	16.2	12.8	5		1	124.67
34298	80 / 65	88.9	76.1	16.1	10.8			1	124.67
34259	100 / 50	108	54	17.2	13.7			1	136.35
34260	100 / 65	108	76.1	18.4	13.1			1	136.35
34261	100 / 80	108	88.9	20.3	14.3			1	136.35

Bends

Geberit Mapress Stainless Steel bend (gas)

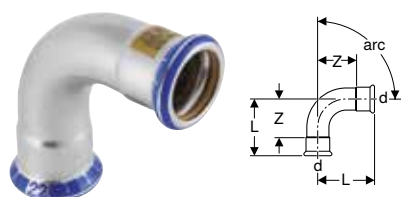
[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34014	12	15	2.8	0.8			5	1	13.99
34015	15	18	2.9	0.9			5	1	15.74
34016	20	22	3.2	1.1		50	5		19.09
34017	25	28	3.7	1.4		50	5		24.16
34193	32	35	4.3	1.7		20	5		36.05
34194	40	42	5.1	2.1			5	1	56.51
34195	50	54	6.2	2.7			5	1	77.92
34447	65	76.1	10.3	5		5		1	199.64
34448	80	88.9	11.7	5.7				1	244.68
34449	100	108	14.3	6.8				1	334.57
arc / angle: 90°									
34000	12	15	3.8	1.8		50	5		13.99
34001	15	18	5.3	3.3		50	5		15.74
34002	20	22	4.7	2.6	2500	50	5		19.09
34003	25	28	5.7	3.4	2500	50	5		24.16
34187	32	35	6.8	4.2		50	5		36.05
34188	40	42	8	5		48	4		56.51
34189	50	54	10	6.5	400	25		1	77.92
34441	65	76.1	15.9	10.6		5		1	199.64
34442	80	88.9	18.5	12.5	80	5		1	244.68
34443	100	108	23	15.5	60	5		1	334.57

Geberit Mapress Stainless Steel bend with plain end (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34021	12	15	2.8	3.6	0.8		5	1	13.99
34022	15	18	2.9	3.6	0.9	25	5		15.74
34023	20	22	3.2	4	1.1	50	5		19.09
34024	25	28	3.7	4.4	1.4	50	5		24.16
34196	32	35	4.3	5	1.7	20	5		36.05
34197	40	42	5.1	5.9	2.1		5	1	56.51
34198	50	54	6.2	7	2.7	24	2		77.92
34450	65	76.1	10.3	11.1	5			1	199.64
34451	80	88.9	11.7	12.8	5.7			1	244.68
34452	100	108	14.3	15.8	6.8			1	334.57
arc / angle: 90°									
34007	12	15	3.8	4.8	1.8	25	5		13.99
34008	15	18	4.2	5.2	2.2	25	5		15.74
34009	20	22	4.7	5.8	2.6	50	5		19.09
34010	25	28	5.7	6.3	3.4	50	5		24.16
34190	32	35	6.8	7.4	4.2	50	5		36.05
34191	40	42	8	8.8	5	24	2		56.51
34192	50	54	10	10.8	6.5	30		1	77.92
34444	65	76.1	15.9	16.7	10.6	5		1	199.64
34445	80	88.9	18.5	19.5	12.5			1	244.68
34446	100	108	23	24.1	15.5			1	334.57

Geberit Mapress Stainless Steel bend with plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
30892	12	15	4	11	0	7				1	14.17
30893	15	18	4	11.2	0	7.1				1	14.47
30894	20	22	4.1	11.4	0	7.3				1	15.32
30905	25	28	4.3	11.9	0	7.6			5	1	15.87
30906	32	35	4.1	11.8	0	7.7				1	33.26
30907	40	42	4.7	13.7	0	9				1	40.93
30908	50	54	5.5	14.9	0	9.4				1	51.19
30009	65	76.1	8.4	20.4	0	12				1	160.37
30010	80	88.9	9.5	22	0	12.5				1	180.87
30011	100	108	11.7	25.4	0	13.7				1	216.70
arc / angle: 30°											
30932	12	15	4.3	11.3	0	7				1	14.17
30933	15	18	4.4	11.6	0	7.1				1	14.47
30934	20	22	4.6	11.8	0	7.2			5	1	15.32
30935	25	28	4.8	12.4	0	7.6			5	1	15.87
30936	32	35	4.6	12.3	0	7.7				1	33.26
30937	40	42	5.4	14.4	0	9				1	40.93
30938	50	54	6.3	15.7	0	9.4				1	51.19
30029	65	76.1	9.7	21.7	0	12				1	160.37
30030	80	88.9	11.1	23.6	0	12.5				1	180.87
30031	100	108	13.6	27.3	0	13.7				1	216.70
arc / angle: 45°											
30872	12	15	4.5	11.6	0	7.1			5	1	14.17
30873	15	18	4.2	11.7	0	7.5				1	14.47
30874	20	22	5.2	12.3	0	7.1				1	15.32
30875	25	28	5.6	13.1	0	7.5				1	15.87
30876	32	35	5.3	12.9	0	7.6				1	33.26
30877	40	42	6.1	15.1	0	9				1	40.93
30878	50	54	7.3	16.7	0	9.4				1	51.19
30049	65	76.1	11.1	23	0	11.9				1	160.37
30050	80	88.9	13	25.2	0	12.2				1	180.87
30051	100	108	15.7	29.4	0	13.7				1	216.70
arc / angle: 60°											
30942	12	15	5	12	0	7				1	14.17
30943	15	18	5.3	12.4	0	7.1				1	14.47
30944	20	22	5.6	12.8	0	7.2				1	15.32
30955	25	28	6.1	13.7	0	7.6				1	15.87
30956	32	35	5.9	13.6	0	7.7				1	33.26
30957	40	42	6.9	15.9	0	9				1	40.93
30958	50	54	8.3	17.7	0	9.4				1	51.19
30069	65	76.1	12.6	24.6	0	12				1	160.37
30070	80	88.9	14.6	27.1	0	12.5				1	180.87
30071	100	108	18	31.7	0	13.7				1	216.70
arc / angle: 90°											
30402	12	15	5.9	12.9	0	7	5600	50	10		14.17
30403	15	18	6.1	13.3	0	7.2		50	10		14.47
30404	20	22	7	14.2	0	7.2		50	10		15.32
30405	25	28	7.9	15.5	0	7.6		50	10		15.87
30406	32	35	7.7	15.4	0	7.7			5	1	33.26
30407	40	42	9	18	0	9			5	1	40.93
30408	50	54	11.1	20.5	0	9.4			5	1	51.19
30089	65	76.1	16.6	28.6	0	12				1	160.37
30090	80	88.9	19.4	31.9	0	12.5				1	180.87
30091	100	108	24	37.7	0	13.7				1	216.70



Geberit Mapress Stainless Steel bend 90°, long


[click & scan](#)

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU1 [pc.]	GBP/pc.
30414	20	22	90	7	84	1.5	70	1	43.22
30415	25	28	90	8	85	1.7	77	1	46.31

Geberit Mapress Stainless Steel pipe bridge


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	30	6	16.5	3.2	25	5		12.21
30803	15	18	30	6	16.6	3.3	25	5		12.63
30804	20	22	30	6	16.8	3.5	25	5		14.33
30805	25	28	30	6	17.9	3.8			1	17.39

T-pieces

Geberit Mapress Stainless Steel T-piece, equal (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34028	12	15	90	6.4	3.9	3.2	1.2	1.9		5	1	21.15
34029	15	18	90	6.8	4.1	3.4	1.4	2.1		5	1	24.09
34030	20	22	90	7.4	4.4	3.7	1.6	2.3	25	5		25.90
34031	25	28	90	8.4	5	4.2	1.9	2.7	25	5		30.41
34032	32	35	90	10	5.7	5	2.4	3.1		5		38.37
34033	40	42	90	11.4	6.5	5.7	2.7	3.5		5	1	54.56
34034	50	54	90	13.8	7.7	6.9	3.4	4.2		5	1	65.19
34285	65	76.1	90	23	11	11.5	6.2	5.7			1	359.17
34286	80	88.9	90	26	12.7	13	7	6.7			1	393.00
34287	100	108	90	31	15.3	15.5	8	7.8			1	485.09

Geberit Mapress Stainless Steel T-piece, reduced (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34035	15 / 12 / 15	18	15	18	90	6.8	4.1	3.4	3.4	1.4	2.1	1.4		1	21.83
34036	20 / 12 / 20	22	15	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	23.36
34037	20 / 15 / 20	22	18	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6		1	23.36
34038	25 / 12 / 25	28	15	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	28.21
34039	25 / 15 / 25	28	18	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	28.21
34040	25 / 20 / 25	28	22	28	90	8.4	4.7	4.2	4.2	1.9	2.6	1.9	5	1	28.21
34041	32 / 12 / 32	35	15	35	90	10	4.9	5	5	2.4	2.9	2.4		1	34.44
34042	32 / 15 / 32	35	18	35	90	10	4.9	5	5	2.4	2.9	2.4		1	35.05
34043	32 / 20 / 32	35	22	35	90	10	5	5	5	2.4	2.9	2.4	5	1	35.05
34044	32 / 25 / 32	35	28	35	90	10	5.3	5	5	2.4	3	2.4	5	1	35.05
34140	40 / 12 / 40	42	15	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	44.59
34141	40 / 15 / 40	42	18	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	44.59
34045	40 / 20 / 40	42	22	42	90	11.4	5.4	5.7	5.7	2.7	3.3	2.7	5	1	50.65
34046	40 / 25 / 40	42	28	42	90	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	50.65
34047	40 / 32 / 40	42	35	42	90	11.4	6.1	5.7	5.7	2.7	3.5	2.7		1	50.65
34048	50 / 20 / 50	54	22	54	90	13.8	6	6.9	6.9	3.4	3.9	3.4	5	1	58.43
34049	50 / 25 / 50	54	28	54	90	13.8	6.3	6.9	6.9	3.4	4	3.4	5	1	58.43
34050	50 / 32 / 50	54	35	54	90	13.8	6.7	6.9	6.9	3.4	4.1	3.4		1	58.43



Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34051	50 / 40 / 50	54	42	54	90	13.8	7.1	6.9	6.9	3.4	4.1	3.4		1	58.43
34097	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2		1	303.93
34098	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7		1	331.22
34099	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8		1	389.67

Geberit Mapress Stainless Steel T-piece with female thread (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug


Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34052	12 / 15 / 12	15	1/2	15	90	6.4	4	3.2	3.2	1.2	2.7	1.2			1	23.36
34053	15	18	1/2	18	90	6.8	4.2	3.4	3.4	1.4	2.9	1.4			1	23.36
34054	15 / 20 / 15	18	3/4	18	90	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	23.36
34055	20 / 15 / 20	22	1/2	22	90	7.4	4.3	3.7	3.7	1.6	3	1.6	25	5		27.28
34056	20	22	3/4	22	90	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	27.28
34057	25 / 15 / 25	28	1/2	28	90	8.4	4.6	4.2	4.2	1.9	3.3	1.9	25	5		31.14
34058	25 / 20 / 25	28	3/4	28	90	8.4	4.9	4.2	4.2	1.9	3.4	1.9			1	31.14
34059	32 / 15 / 32	35	1/2	35	90	10	5	5	5	2.4	3.7	2.4		5	1	31.84
34060	32 / 20 / 32	35	3/4	35	90	10	5.3	5	5	2.4	3.8	2.4			1	36.99
34061	40 / 15 / 40	42	1/2	42	90	11.4	5.3	5.7	5.7	2.7	4	2.7		5	1	41.86
34126	40 / 20 / 40	42	3/4	42	90	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	41.86
34063	50 / 15 / 50	54	1/2	54	90	13.8	5.9	6.9	6.9	3.4	4.6	3.4		5	1	52.60
34264	50 / 20 / 50	54	3/4	54	90	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	52.60
34265	50	54	2	54	90	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	52.60
34266	65 / 20 / 65	76.1	3/4	76.1	90	23	7.4	11.5	11.5	6.2	5.9	6.2			1	311.73
34267	65 / 50 / 65	76.1	2	76.1	90	23	9.1	11.5	11.5	6.2	6.8	6.2			1	311.73
34268	80 / 20 / 80	88.9	3/4	88.9	90	26	8	13	13	7	6.5	7			1	331.22
34269	80 / 50 / 80	88.9	2	88.9	90	26	9.7	13	13	7	7.4	7			1	331.22
34270	100 / 20 / 100	108	3/4	108	90	31	9	15.5	15.5	8	7.5	8			1	389.67
34271	100 / 50 / 100	108	2	108	90	31	10.7	15.5	15.5	8	8.4	8			1	389.67



- Fittings with screwing joints >2" have a reduced operating pressure: MOP 0.1 / GT 0.1

Adaptors, permanent

Geberit Mapress Stainless Steel adaptor to cutting ring connection (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	I [cm]	H [cm]	SU1 [pc.]	GBP/pc.
34355	12	15	8	5.1	6	1	19.26

Geberit Mapress Stainless Steel adaptor with male thread (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34066	12 / 15	15	1/2	4.1	2.1	50	5		17.50
34142	12 / 20	15	3/4	4.3	2.3			1	17.50
34067	15	18	1/2	4.2	2.2	50	5		19.47
34143	15 / 20	18	3/4	4.4	2.4			1	19.47
34069	20 / 15	22	1/2	4.2	2.1	50	5		21.42
34070	20	22	3/4	4.4	2.3	50	5		21.42
34346	20 / 25	22	1	4.6	2.5	50	5		21.42
34068	25 / 20	28	3/4	4.6	2.3	50	5		27.28
34071	25	28	1	4.8	2.3	50	5		27.28
34075	32 / 25	35	1	5.1	2.5	25	5		39.00
34072	32	35	1 1/4	5.3	2.7	50	5		39.00
34076	32 / 40	35	1 1/2	5.3	2.7		5	1	39.00
34073	40	42	1 1/2	5.7	2.7	25		1	57.63
34074	50	54	2	8.9	5.4	25		1	77.92
34077	65	76.1	2 1/2	12.3	7	5		1	354.23
34078	80	88.9	3	13.7	7.7			1	531.49



- Fittings with screwing joints >2" have a reduced operating pressure: MOP 0.1 / GT 0.1

Geberit Mapress Stainless Steel adaptor with male thread and plain end


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------



Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12 / 15	15	1/2	5.7	25	5		15.32
31933	15	18	1/2	5.7	25	5		17.02
31936	20	22	3/4	5.9	25	5		18.75
31937	25	28	1	6.6	25	5		23.87
31938	32	35	1 1/4	8		5	1	34.12
31939	40	42	1 1/2	9.1		5	1	50.48
31940	50	54	2	10.2		5	1	68.23

Geberit Mapress Stainless Steel adaptor with female thread (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34083	12 / 15	15	1/2	3.7	0.4	25	5		16.67
34169	12 / 20	15	3/4	3.8	0.3			1	16.67
34084	15	18	1/2	3.7	0.4		5	1	18.72
34170	15 / 20	18	3/4	3.8	0.3			1	18.72
34086	20 / 15	22	1/2	3.6	0.2	25	5		19.84
34087	20	22	3/4	3.9	0.3	25	5		19.84
34347	20 / 25	22	1	4.2	0.4		5	1	21.02
34089	25	28	1	4.4	0.4	50	5		26.69
34093	32 / 25	35	1	4.5	0.2		5	1	39.00
34090	32	35	1 1/4	4.9	0.4		5	1	39.00
34091	40	42	1 1/2	5.3	0.4		5	1	54.90
34092	50	54	2	6.2	0.4		5	1	74.22

Geberit Mapress Stainless Steel adaptor with female thread and plain end


[click & scan](#)

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	5.8	4.5	5		1	21.70
33848	25 / 15	28	1/2	6.6	5.3		5	1	28.28
33850	32 / 15	35	1/2	6.9	5.6			1	37.47
33852	40 / 15	42	1/2	7.4	6.1		5	1	48.01
33854	50 / 15	54	1/2	7.9	6.6		5	1	57.20
33860	65 / 15	76.1	1/2	10.4	9.1			1	199.87
33862	80 / 15	88.9	1/2	11.3	10			1	284.02
33864	100 / 15	108	1/2	13.4	12.1			1	342.50

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long


[click & scan](#)

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12 / 15	15	1/2	14.8	13.5	9	5	1	15.32
90933	15	18	1/2	14.8	13.5	9	5	1	17.02
90934	15 / 20	18	3/4	15.2	13.3	9		1	17.02
90935	20 / 15	22	1/2	14.8	13.9	8.9	5		18.75
90936	20	22	3/4	15.2	13.7	8.7	5	1	18.75

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34149	12 / 15	15	1/2	90	5.7	3.7	3.7		1	24.48
34150	15	18	1/2	90	5.7	3.9	3.7		1	26.39
34151	20	22	3/4	90	6	4.6	3.9	10	1	33.81
34154	25 / 20	28	3/4	90	5.8	4.6	3.5		1	43.20
34152	25	28	1	90	6.7	5.4	4.4	5	1	43.20
34153	32	35	1 1/4	90	7.5	6.3	4.9		1	61.76

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34144	12 / 15	15	1/2	90	5.7	3.7	3.7	2.4		1	27.96
34145	15	18	1/2	90	5.7	3.9	3.7	2.6	5	1	31.58
34146	20	22	3/4	90	6	4.6	3.9	3.1	5		37.67
34147	25	28	1	90	6.7	5.4	4.3	3.7	5	1	48.80
34148	32	35	1 1/4	90	7.5	6.3	4.9	4.4		1	83.31

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100



Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	90	3.6	5.3	2.3	25	5	21.32

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (gas)


[click & scan](#)

Application purposes

- For connecting to house supply pipes
- For connecting measuring valves, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of fibre composite material
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34430	12 / 15	15	1/2	3/4	6.4	4.4	5	1	31.14
34431	12 / 20	15	3/4	3/4	6.6	4.6		1	31.14
34432	15	18	1/2	3/4	6.4	4.4		1	33.71
34433	15 / 20	18	3/4	3/4	6.6	4.6		1	33.71
34434	20 / 15	22	1/2	1	6.7	4.6		1	35.05
34435	20	22	3/4	1	6.8	4.7	5	1	35.05
34436	20 / 25	22	1	1	7.3	5.2		1	35.05
34437	25	28	1	1 1/4	7.8	5.5	5	1	58.43
34438	32	35	1 1/4	1 1/2	8.5	5.9	5	1	75.98
34439	40	42	1 1/2	1 3/4	9	6		1	87.48
34440	50	54	2	2 3/8	10.3	6.8	5	1	151.99

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (gas)


[click & scan](#)

Application purposes

- For connecting to house supply pipes
- For connecting measuring valves, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of fibre composite material
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
34400	12 / 15	15	1/2	3/4	5.9	2.6	1	31.14
34401	12 / 20	15	3/4	3/4	6.1	2.6	1	31.14
34402	15	18	1/2	3/4	5.9	2.6	1	33.71
34403	15 / 20	18	3/4	3/4	6.1	2.6	1	33.71
34404	20	22	3/4	1	6.3	2.7	1	35.05
34405	20 / 25	22	1	1	6.6	2.8	1	35.05
34406	25	28	1	1 1/4	7.1	3.1	1	58.43
34407	32	35	1 1/4	1 1/2	7.7	3.2	1	75.98
34408	40	42	1 1/2	1 3/4	8.2	3.3	1	87.48
34409	50	54	2	2 3/8	9.5	3.7	1	151.99

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Conical-sealing
- Marked in yellow
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34158	20	22	1 1/8	4.2	1.6		1	29.10
34161	20	22	1 3/8	4	1.9	5	1	29.10
34159	25	28	1 3/8	4.5	1.7	5	1	37.83

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel and plain end (gas)


[click & scan](#)

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Conical-sealing
- Marked in yellow
- Union nut with hole for sealing
- O-ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
34214	25	28	1 3/8	12.8	2.4	1	35.11

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
34204	25 / 20	22	19	11.5	85	14	6.1	1.8	4	4	10 / 16		1	88.64
34205	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	108.48
34206	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	153.01
34207	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	179.50
34208	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	221.41
34209	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	363.90
34210	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	431.34
34211	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	511.66

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

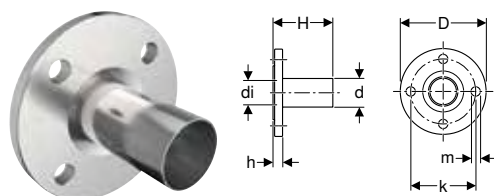
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	72.08
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	88.13
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	124.45
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	145.99
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	72	1	257.45
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	294.73
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	345.01
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	413.34

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (gas)

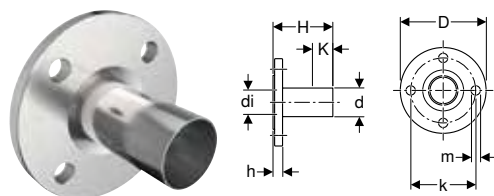
[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Marked in yellow
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	K [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
34212	25	28	25	11.5	85	14	15	1.8	6.9	4	10 / 16	1	110.75

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104



Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	87.11
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	106.23
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	153.44
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	178.46
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16		1	220.94
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	348.42
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	407.91
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	488.62

To order additionally


- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Sealings

Geberit Mapress Stainless Steel cap (gas)



click & scan

Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34462	12	15	2.3	0.3		1	14.47
34463	15	18	2.3	0.3		1	17.44
34464	20	22	2.4	0.3	5	1	18.21
34465	25	28	2.6	0.3		1	22.68
34466	32	35	2.9	0.3		1	31.71
34467	40	42	3.3	0.3		1	69.00
34468	50	54	3.8	0.3		1	75.92
34469	65	76.1	6	0.7		1	89.24
34470	80	88.9	6.7	0.7		1	99.08
34471	100	108	8.2	0.7		1	110.27

Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	I [cm]	I1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm											
34136	12	15	1/2	90	5	1.3	1.5	3		1	30.88
34137	15	18	1/2	90	5	1.3	1.5	3	5	1	33.34
L1 / length: 4.7 cm											
34139	20	22	1/2	90	5.4	1.7	1.6	2.9		1	43.35
L1 / length: 5.1 cm											
34138	20	22	3/4	90	5.4	1.7	1.6	3.3	10	1	47.74

Geberit Mapress Stainless Steel elbow tap connector 90°, offset, circular hole 50 mm (gas)

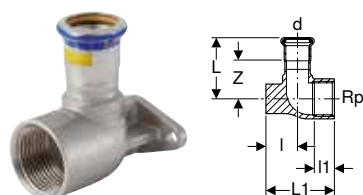
[click & scan](#)

Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole ø 50 mm
- Seal ring made of HNBR, yellow
- Silicone-free (LABS-free)
- Pressing socket with yellow protection plug


Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	I [cm]	I1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm											
91097	20	22	3/4	90	5.8	3	1.8	3.7		1	43.16
91099	20 / 25	22	1	90	5.8	3	1.9	3.7	5	1	29.80
91098	25 / 20	28	3/4	90	6.1	3	1.8	3.8	5	1	44.97
91100	25	28	1	90	6.1	3	1.9	3.8	5	1	31.08

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 61



Geberit Mapress mounting bracket for gas metre

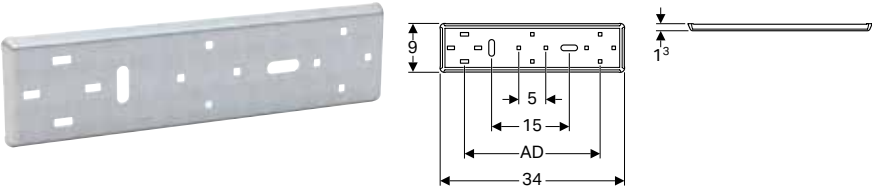

Application purposes

- For one- and two-pipe gas metres

Technical data

Product material	Steel
------------------	-------

Characteristics

- Connecting distance adjustable by ± 3 mm at the gas metre
- Zinc-plated
- Circular hole $\varnothing$ 50 mm

Scope of delivery


- Fastening material

Art. no.	AD [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91096	25	10	1	25.78

Geberit Mapress Stainless Steel, silicone-free

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo

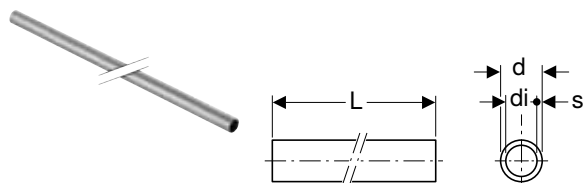

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.		DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 3 m									
39031	N	12	15	13	1	420	60		18.20
39032	N	15	18	16	1	210			21.74
39033	N	20	22	19.6	1.2	210			29.82
39034	N	25	28	25.6	1.2	90			36.13
39035	N	32	35	32	1.5	90			53.81
39036	N	40	42	39	1.5	90			63.89
39037	N	50	54	51	1.5	90			82.46
39038	N	65	76.1	72.1	2	72			170.51
39039	N	80	88.9	84.9	2	48			193.61
39040	N	100	108	104	2	39			249.11
L / length: 6 m									
39002		12	15	13	1	840	120		14.14
39003		15	18	16	1	420	60		16.69
39004		20	22	19.6	1.2	420	60		22.57
39005		25	28	25.6	1.2	180	60		27.82
39006		32	35	32	1.5	180	30		40.99
39007		40	42	39	1.5	180	30		50.41
39008		50	54	51	1.5	180	30		64.16
39009		65	76.1	72.1	2	144		6	130.02
39010		80	88.9	84.9	2	96		6	148.13
39011		100	108	104	2	78		6	178.41

N: New, available as of April 2025

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339



Couplings

Geberit Mapress Stainless Steel coupling (silicone-free)



[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
82002	12	15	4.8	0.8	30	1	8.42
82003	15	18	4.8	0.8	25	1	9.00
82004	20	22	5	0.8	25	1	10.54
82005	25	28	5.4	0.8	25	1	11.90
82006	32	35	6.2	1	10	1	14.76
82007	40	42	7.1	1.1	10	1	20.15
82008	50	54	8.3	1.3	25	1	24.16
82009	65	76.1	12.7	2.1		1	119.64
82010	80	88.9	14.5	2.5		1	136.71
82011	100	108	17.4	2.6		1	173.72

Geberit Mapress Stainless Steel slip coupling (silicone-free)



[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
82102	12	15	2.5	8	3	1	13.92
82103	15	18	2.5	8	3	1	14.47
82104	20	22	2.5	8.4	3.4	1	16.52
82105	25	28	3	9.1	3.1	1	19.11
82106	32	35	3	10.2	4.2	1	21.37
82107	40	42	4	12	4	1	24.87
82108	50	54	4	14	6	1	31.72
82109	65	76.1	6	23	11	1	176.69
82110	80	88.9	7	26	12	1	199.45
82111	100	108	8	31	15	1	239.32

Reducers

Geberit Mapress Stainless Steel reducer with plain end (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
82303	15 / 12	18	15	5.5	3.5		1	9.94
82305	20 / 12	22	15	5.9	3.9		1	10.99
82306	20 / 15	22	18	5.7	3.7	5	1	10.99
82307	25 / 12	28	15	6.6	4.6		1	12.52
82308	25 / 15	28	18	6.4	4.4		1	12.52
82309	25 / 20	28	22	6	3.9	5	1	12.52
82310	32 / 12	35	15	7.5	5.5		1	19.72
82311	32 / 15	35	18	7.4	5.4		1	19.72
82312	32 / 20	35	22	7.1	5		1	19.72
82313	32 / 25	35	28	6.8	4.5		1	19.72
82314	40 / 12	42	15	8.1	6.1		1	35.82
82315	40 / 15	42	18	8	6		1	35.82
82316	40 / 20	42	22	8.2	6.1		1	35.82
82317	40 / 25	42	28	8.3	6		1	35.82
82318	40 / 32	42	35	7.7	5.1		1	35.82
82319	50 / 12	54	15	9.7	7.7		1	50.18
82320	50 / 15	54	18	9.6	7.6		1	50.18
82321	50 / 20	54	22	9.5	7.4		1	50.18
82322	50 / 25	54	28	11	8.7	5	1	50.18
82323	50 / 32	54	35	10.6	8		1	50.18
82324	50 / 40	54	42	9.2	6.2		1	50.18
82331	65 / 50	76.1	54	14.6	11.1		1	113.65
82338	80 / 50	88.9	54	16.2	12.8		1	122.50
82339	80 / 65	88.9	76.1	16.1	10.8		1	122.50
82345	100 / 50	108	54	17.2	13.7		1	128.98
82346	100 / 65	108	76.1	18.4	13.1		1	128.98
82348	100 / 80	108	88.9	20.3	14.3		1	128.98

Bends

Geberit Mapress Stainless Steel bend (silicone-free)

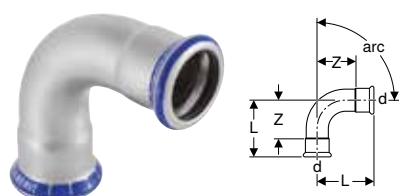

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------



Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
80602	12	15	2.8	0.8				5 1	13.60
80603	15	18	2.9	0.9				5 1	15.27
80604	20	22	3.2	1.1				5 1	18.57
80605	25	28	3.7	1.4		10		1	23.49
82606	32	35	4.3	1.7			5	1	33.10
82607	40	42	5.1	2.1				1	51.96
82608	50	54	6.2	2.7		10		1	71.66
82609	65	76.1	10.3	5				1	194.07
82610	80	88.9	11.7	5.7				1	232.93
82611	100	108	14.3	6.8				1	319.22
arc / angle: 90°									
80102	12	15	3.8	1.8		50		1	13.60
80103	15	18	5.3	3.3		50		1	15.27
80104	20	22	4.7	2.6		50		1	18.57
80105	25	28	5.7	3.4		50		1	23.49
81106	32	35	6.8	4.2		50		1	33.10
81107	40	42	8	5			15	1	51.96
81108	50	54	10	6.5	480	30		1	71.66
81109	65	76.1	15.9	10.6				1	194.07
81110	80	88.9	18.5	12.5				1	232.93
81111	100	108	23	15.5				1	319.22

Geberit Mapress Stainless Steel bend with plain end (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
80702	12	15	2.8	3.6	0.8			5 1	13.60
80703	15	18	2.9	3.6	0.9			5 1	15.27
80704	20	22	3.2	4	1.1			5 1	18.57
80705	25	28	3.7	4.4	1.4	10		1	23.49
82706	32	35	4.3	5	1.7		5	1	33.10
82707	40	42	5.1	5.9	2.1			1	51.96
82708	50	54	6.2	7	2.7		5	1	71.66
82709	65	76.1	10.3	11.1	5			1	194.07
82710	80	88.9	11.7	12.8	5.7			1	232.93
82711	100	108	14.3	15.8	6.8			1	319.22
arc / angle: 90°									
80302	12	15	3.8	4.8	1.8	40		1	13.60
80303	15	18	4.2	5.2	2.2	25		1	15.27
80304	20	22	4.7	5.8	2.6	25		1	18.57
80305	25	28	5.7	6.3	3.4	25		1	23.49
83306	32	35	6.8	7.4	4.2	10		1	33.10
83307	40	42	8	8.8	5		5	1	51.96
83308	50	54	10	10.8	6.5	25		1	71.66
83309	65	76.1	15.9	16.7	10.6			1	194.07
83310	80	88.9	18.5	19.5	12.5			1	232.93
83311	100	108	23	24.1	15.5			1	319.22

T-pieces

Geberit Mapress Stainless Steel T-piece, equal (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81002	12	15	90	6.4	3.9	3.2	1.2	1.9	10		1	19.47
81003	15	18	90	6.8	4.1	3.4	1.4	2.1	10		1	22.16
81004	20	22	90	7.4	4.4	3.7	1.6	2.3	10		1	23.82
81005	25	28	90	8.4	5	4.2	1.9	2.7	10		1	27.99
81006	32	35	90	10	5.7	5	2.4	3.1	10		1	35.33
81007	40	42	90	11.4	6.5	5.7	2.7	3.5		5	1	50.19
81008	50	54	90	13.8	7.7	6.9	3.4	4.2	10		1	59.98
81009	65	76.1	90	23	11	11.5	6.2	5.7			1	330.34
81010	80	88.9	90	26	12.7	13	7	6.7			1	361.43
81011	100	108	90	31	15.3	15.5	8	7.8			1	446.10

Geberit Mapress Stainless Steel T-piece, reduced (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material		CrNiMo steel 1.4401 (EN 10088)													
Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81204	15 / 12 / 15	18	15	18	90	6.8	4.1	3.4	3.4	1.4	2.1	1.4		1	20.06
81206	20 / 12 / 20	22	15	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	21.51
81207	20 / 15 / 20	22	18	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	21.51
81209	25 / 12 / 25	28	15	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	25.96
81210	25 / 15 / 25	28	18	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5	1	25.96
81211	25 / 20 / 25	28	22	28	90	8.4	4.7	4.2	4.2	1.9	2.6	1.9		1	25.96
81212	32 / 12 / 32	35	15	35	90	10	4.9	5	5	2.4	2.9	2.4		1	31.69
81213	32 / 15 / 32	35	18	35	90	10	4.9	5	5	2.4	2.9	2.4		1	32.23
81214	32 / 20 / 32	35	22	35	90	10	5	5	5	2.4	2.9	2.4		1	32.23
81215	32 / 25 / 32	35	28	35	90	10	5.3	5	5	2.4	3	2.4		1	32.23
81216	40 / 12 / 40	42	15	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	46.57
81217	40 / 15 / 40	42	18	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	46.57
81218	40 / 20 / 40	42	22	42	90	11.4	5.4	5.7	5.7	2.7	3.3	2.7		1	46.57
81219	40 / 25 / 40	42	28	42	90	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	46.57
81220	40 / 32 / 40	42	35	42	90	11.4	6.1	5.7	5.7	2.7	3.5	2.7		1	46.57



Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81221	50 / 12 / 50	54	15	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4	1	1	53.77
81222	50 / 15 / 50	54	18	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4	1	1	53.77
81223	50 / 20 / 50	54	22	54	90	13.8	6	6.9	6.9	3.4	3.9	3.4	1	1	53.77
81224	50 / 25 / 50	54	28	54	90	13.8	6.3	6.9	6.9	3.4	4	3.4	1	1	53.77
81225	50 / 32 / 50	54	35	54	90	13.8	6.7	6.9	6.9	3.4	4.1	3.4	1	1	53.77
81226	50 / 40 / 50	54	42	54	90	13.8	7.1	6.9	6.9	3.4	4.1	3.4	1	1	53.77
81229	65 / 20 / 65	76.1	22	76.1	90	23	7.2	11.5	11.5	6.2	5.1	6.2	1	1	279.53
81230	65 / 25 / 65	76.1	28	76.1	90	23	7.5	11.5	11.5	6.2	5.2	6.2	1	1	279.53
81231	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2	1	1	279.53
81232	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2	1	1	279.53
81233	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2	1	1	279.53
81236	80 / 20 / 80	88.9	22	88.9	90	26	7.8	13	13	7	5.7	7	1	1	304.58
81237	80 / 25 / 80	88.9	28	88.9	90	26	8.1	13	13	7	5.8	7	1	1	304.58
81238	80 / 32 / 80	88.9	35	88.9	90	26	8.5	13	13	7	5.9	7	1	1	304.58
81239	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7	1	1	304.58
81240	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7	1	1	304.58
81241	80 / 65 / 80	88.9	76.1	88.9	90	26	11.6	13	13	7	6.3	7	1	1	304.58
81244	100 / 20 / 100	108	22	108	90	31	8.8	15.5	15.5	8	6.7	8	1	1	358.37
81245	100 / 25 / 100	108	28	108	90	31	9.1	15.5	15.5	8	6.8	8	1	1	358.37
81246	100 / 32 / 100	108	35	108	90	31	9.5	15.5	15.5	8	6.9	8	1	1	358.37
81247	100 / 40 / 100	108	42	108	90	31	9.9	15.5	15.5	8	6.9	8	1	1	358.37
81248	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8	1	1	358.37
81249	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8	1	1	358.37
81250	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8	1	1	358.37

Geberit Mapress Stainless Steel T-piece with male thread (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	d1, ø [mm]	arc [°]	L [cm]	I [cm]	I1 [cm]	H [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
81454	12 / 15 / 12	15	1/2	15	90	6.4	3.2	3.2	3.4	1.2	1.2	1	21.51
81455	15	18	1/2	18	90	6.8	3.4	3.4	3.6	1.4	1.4	1	21.51
81458	20	22	3/4	22	90	7.4	3.7	3.7	4.2	1.6	1.6	1	25.05
81461	25	28	1	28	90	8.4	4.2	4.2	4.8	1.9	1.9	1	28.61

Geberit Mapress Stainless Steel T-piece with female thread (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81304	12 / 15 / 12	15	1/2	15	90	6.4	4	3.2	3.2	1.2	2.7	1.2			1	21.51
81305	15	18	1/2	18	90	6.8	4.2	3.4	3.4	1.4	2.9	1.4			1	21.51
81306	15 / 20 / 15	18	3/4	18	90	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	21.51
81307	20 / 15 / 20	22	1/2	22	90	7.4	4.3	3.7	3.7	1.6	3	1.6		5	1	25.05
81308	20	22	3/4	22	90	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	25.05
81309	25 / 15 / 25	28	1/2	28	90	8.4	4.6	4.2	4.2	1.9	3.3	1.9	10		1	28.61
81310	25 / 20 / 25	28	3/4	28	90	8.4	4.9	4.2	4.2	1.9	3.4	1.9		5	1	28.61
81311	25	28	1	28	90	8.4	5.3	4.2	4.2	1.9	3.6	1.9			1	28.61
81312	32 / 15 / 32	35	1/2	35	90	10	5	5	5	2.4	3.7	2.4		5	1	34.04
81313	32 / 20 / 32	35	3/4	35	90	10	5.3	5	5	2.4	3.8	2.4			1	34.04
81316	40 / 15 / 40	42	1/2	42	90	11.4	5.3	5.7	5.7	2.7	4	2.7			1	38.52
81317	40 / 20 / 40	42	3/4	42	90	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	38.52
81320	50 / 15 / 50	54	1/2	54	90	13.8	5.9	6.9	6.9	3.4	4.6	3.4	10		1	48.36
81321	50 / 20 / 50	54	3/4	54	90	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	48.36
81324	50	54	2	54	90	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	48.36
81326	65 / 20 / 65	76.1	3/4	76.1	90	23	7.4	11.5	11.5	6.2	5.9	6.2			1	286.68
81331	80 / 20 / 80	88.9	3/4	88.9	90	26	8	13	13	7	6.5	7			1	304.58
81334	80 / 50 / 80	88.9	2	88.9	90	26	9.7	13	13	7	7.4	7			1	304.58
81336	100 / 20 / 100	108	3/4	108	90	31	9	15.5	15.5	8	7.5	8			1	358.37
81339	100 / 50 / 100	108	2	108	90	31	10.7	15.5	15.5	8	8.4	8			1	358.37

Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81726	12 / 10	15	3/8	3.8	1.8			1	16.10
81703	12 / 15	15	1/2	4.1	2.1	20		1	16.10
81714	12 / 20	15	3/4	4.3	2.3			1	16.10
81704	15	18	1/2	4.2	2.2	25		1	17.90
81705	15 / 20	18	3/4	4.4	2.4			1	17.90
81715	20 / 15	22	1/2	4.2	2.1		5	1	19.72
81707	20	22	3/4	4.4	2.3	25		1	19.72



Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81716	20 / 25	22	1	4.6	2.5			1	19.72
81717	25 / 20	28	3/4	4.6	2.3		5	1	25.05
81708	25	28	1	4.8	2.3	25		1	25.05
81718	25 / 32	28	1 1/4	4.8	2.5			1	25.05
81719	32 / 25	35	1	5.1	2.5			1	35.82
81709	32	35	1 1/4	5.3	2.7	10		1	35.82
81720	32 / 40	35	1 1/2	5.3	2.7			1	35.82
81721	40 / 32	42	1 1/4	5.7	2.7			1	53.01
81710	40	42	1 1/2	5.7	2.7	10		1	53.01
81722	50 / 40	54	1 1/2	8.3	4.8			1	71.66
81711	50	54	2	8.9	5.4	25		1	71.66
81713	65	76.1	2 1/2	12.3	7			1	325.76
81724	80	88.9	3	13.7	7.7			1	488.84

Geberit Mapress Stainless Steel adaptor with female thread (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81802	12 / 15	15	1/2	3.7	0.4		5	1	16.10
81823	12 / 20	15	3/4	3.8	0.3			1	16.10
81803	15	18	1/2	3.7	0.4	30		1	17.90
81804	15 / 20	18	3/4	3.8	0.3			1	17.90
81805	20 / 15	22	1/2	3.6	0.2		5	1	19.72
81806	20	22	3/4	3.9	0.3		5	1	19.72
81824	20 / 25	22	1	4.2	0.4			1	19.72
81807	25 / 15	28	1/2	3.8	0.2		5	1	25.05
81819	25 / 20	28	3/4	3.9	0.3		5	1	25.05
81809	25	28	1	4.4	0.4	10		1	25.05
81825	25 / 32	28	1 1/4	4.6	0.4			1	25.05
81820	32 / 25	35	1	4.5	0.2			1	35.82
81811	32	35	1 1/4	4.9	0.4			1	35.82
81826	32 / 40	35	1 1/2	4.9	0.4			1	35.82
81821	40 / 32	42	1 1/4	5.1	0.2			1	53.01
81814	40	42	1 1/2	5.3	0.4		5	1	53.01
81822	50 / 40	54	1 1/2	7.1	2.2			1	71.66
81818	50	54	2	6.2	0.4		5	1	71.66

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83833	12 / 15	15	1/2	90	5.7	3.7	3.7	1	23.30
83834	15	18	1/2	90	5.7	3.9	3.7	1	25.05
83835	20	22	3/4	90	6	4.6	3.9	1	32.23
83836	25	28	1	90	6.7	5.4	4.4	1	41.21
83837	32	35	1 1/4	90	7.5	6.3	4.9	1	57.35
83838	40	42	1 1/2	90	8.3	6.7	5.3	1	100.82
83839	50	54	2	90	9.4	7.8	5.9	1	128.50

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (silicone-free)

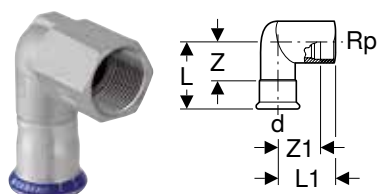

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
83803	12 / 15	15	1/2	90	5.7	3.7	3.7	2.4	1	22.96
83804	15	18	1/2	90	5.7	3.9	3.7	2.6	1	28.03
83805	20	22	3/4	90	6	4.6	3.9	3.1	1	32.23
83806	25	28	1	90	6.7	5.4	4.3	3.7	1	41.21
83807	32	35	1 1/4	90	7.5	6.3	4.9	4.4	1	57.35


Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100



Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85320	12	15	3/4	6.6	2.6		1	55.11
85321	15	18	3/4	6.9	2.9		1	62.51
85322	20	22	1	7.2	3		1	77.43
85323	25	28	1 1/4	7.7	3.1		1	118.91
85324	32	35	1 1/2	8.2	3		1	124.72
85325	40	42	1 3/4	9.5	3.5		1	179.70
85326	50	54	2 3/8	11.3	4.3	5	1	298.43

Geberit Mapress Stainless Steel adaptor union with male thread (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85330	12 / 15	15	1/2	3/4	6.4	4.4		5	1	28.61
85332	15	18	1/2	3/4	6.4	4.4	10		1	30.95
85333	15 / 20	18	3/4	3/4	6.6	4.6			1	30.95
85334	20 / 15	22	1/2	1	6.7	4.6			1	32.23
85335	20	22	3/4	1	6.8	4.7	10		1	32.23
85337	25	28	1	1 1/4	7.8	5.5		5	1	53.77
85338	32	35	1 1/4	1 1/2	8.5	5.9	10		1	69.89
85339	40	42	1 1/2	1 3/4	9	6	10		1	80.45
85340	50	54	2	2 3/8	10.3	6.8	10		1	139.74

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85360	12 / 15	15	1/2	3/4	6.4	4.4		1	37.61
85362	15	18	1/2	3/4	6.4	4.4		1	43.00
85365	20	22	3/4	1	6.8	4.7		1	44.77
85367	25	28	1	1 1/4	7.8	5.5	5	1	68.08
85368	32	35	1 1/4	1 1/2	8.5	5.9		1	90.98
85369	40	42	1 1/2	1 3/4	9	6		1	105.29
85370	50	54	2	2 3/8	10.3	6.8		1	181.93

Geberit Mapress Stainless Steel adaptor union with male thread and plain end



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM


Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35400	12 / 15	15	1/2	3/4	8.6		1	35.82
35402	15	18	1/2	3/4	8.6		1	40.93
35405	20	22	3/4	1	9.2		1	42.64
35407	25	28	1	1 1/4	10.1	5	1	64.82
35408	32	35	1 1/4	1 1/2	10.9		1	86.66
35409	40	42	1 1/2	1 3/4	11.5		1	100.26
35410	50	54	2	2 3/8	12.9		1	173.28



Geberit Mapress Stainless Steel adaptor union with female thread (silicone-free)



[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85300	12 / 15	15	1/2	3/4	5.9	2.6		1	28.61
85301	12 / 20	15	3/4	3/4	6.1	2.6		1	28.61
85302	15	18	1/2	3/4	5.9	2.6		1	30.95
85303	15 / 20	18	3/4	3/4	6.1	2.6		1	30.95
85304	20	22	3/4	1	6.3	2.7		1	32.23
85305	20 / 25	22	1	1	6.6	2.8		1	32.23
85306	25	28	1	1 1/4	7.1	3.1	5	1	53.77
85307	32	35	1 1/4	1 1/2	7.7	3.2		1	69.89
85308	40	42	1 1/2	1 3/4	8.2	3.3		1	80.45
85309	50	54	2	2 3/8	9.5	3.7		1	139.74

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (silicone-free)



[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, Ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85350	12 / 15	15	1/2	3/4	5.9	2.6	1	37.61
85351	15	18	1/2	3/4	5.9	2.6	1	43.00
85358	15 / 20	18	3/4	3/4	6.1	2.6	1	43.00
85352	20	22	3/4	1	6.3	2.7	1	44.77
85359	20 / 25	22	1	1	6.6	2.8	1	44.77
85353	25	28	1	1 1/4	7.1	3.1	1	68.08
85354	32	35	1 1/4	1 1/2	7.7	3.2	1	90.98
85355	40	42	1 1/2	1 3/4	8.2	3.3	1	105.29
85356	50	54	2	2 3/8	9.5	3.7	1	181.93

Geberit Mapress Stainless Steel adaptor union with female thread and plain end


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35380	12 / 15	15	1/2	3/4	8.1	5.9		1	35.82
35382	15	18	1/2	3/4	8.1	5.9		1	40.93
35384	20	22	3/4	1	8.7	6.4		1	42.64
35386	25	28	1	1 1/4	9.4	6.7		1	64.82
35387	32	35	1 1/4	1 1/2	10.1	7.2		1	86.66
35388	40	42	1 1/2	1 3/4	10.7	7.7	5	1	100.26
35389	50	54	2	2 3/8	12	8.4		1	173.28

Geberit Mapress Stainless Steel adaptor with union nut (silicone-free)


[click & scan](#)

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM


Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85042	12	15	1/2	10	5.1	2.5	1	25.05
85032	12	15	3/4	13	3.7	1.1	1	19.72
85072	12	15	1 1/4	26	4.3	1.3	1	19.72
85033	15	18	3/4	13	3.7	1.1	1	20.58
85034	20	22	1	20	4	1.1	1	28.61
85044	20	22	1 1/4	26	4.3	1.3	1	28.61
85045	20	22	1 1/2	32	4.4	1.3	1	28.61
85046	25	28	1	20	5.5	2.4	1	37.61
85035	25	28	1 1/4	26	4.4	1.3	1	37.61
85047	25	28	1 1/2	32	4.6	1.3	1	37.61
85036	32	35	1 1/2	32	4.8	1.3	1	41.21
85037	40	42	1 3/4	39	5.2	1.3	1	54.87
85038	50	54	2 3/8	51	5.8	1.5	1	74.04



Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (silicone-free)



click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	d _i , ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85132	12	15	3/4	13	3.7	1.1	1	25.40
85134	20	22	1	20	4	1.1	1	31.71
85075	25	28	1 1/2	32	4.8	1.3	1	72.37

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (silicone-free)

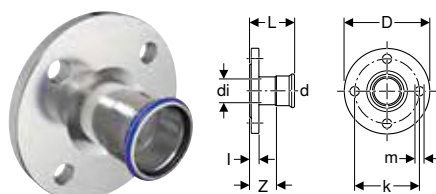

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d _i , ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
83712	15 / 12	15	15	9.5	65	14	6.1	1.6	4.1	4	10 / 16		1	65.36
83713	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16		1	67.20
83714	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	79.44
83715	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	97.16
83716	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	137.18
83717	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	160.95
83718	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	198.43
83719	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	313.55
83720	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	372.60
83721	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	442.27


Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

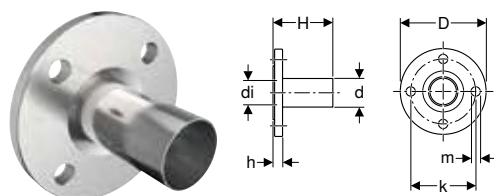

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	72.08
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	88.13
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	124.45
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	145.99
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	72	1	257.45
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	294.73
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	345.01
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	413.34

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6

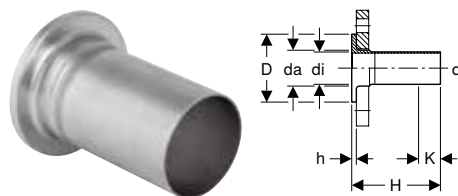

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	3.7	6		1	93.66
36151	32	35	40	32	7	13.5	0.6	2.7	6		1	134.82
36152	40	42	47	39	8	13.5	0.6	0	6		1	157.33
36153	50	54	59	51	9	13.5	0.8	0	6		1	194.78
36154	65	76.1	78	73.1	11	13.5	0.8	0	6		1	307.14
36155	80	88.9	91	84.9	12.8	13.5	1	0	6	96	1	359.58
36156	100	108	110	104	14.8	13.5	1	0	6	75	1	430.79

To order additionally


- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 6 → p. 104



Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	87.11
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	106.23
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	153.44
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	178.46
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16		1	220.94
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	348.42
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	407.91
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	488.62

To order additionally


- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Sealings

Geberit Mapress Stainless Steel cap (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83212	12	15	2.3	0.3	1	14.08
83213	15	18	2.3	0.3	1	16.92
83214	20	22	2.4	0.3	1	18.24
83215	25	28	2.6	0.3	1	22.01
83216	32	35	2.9	0.3	1	30.72
83217	40	42	3.3	0.3	1	66.89
83218	50	54	3.8	0.3	1	73.59

Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (silicone-free)



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm											
83403	12 / 15	15	1/2	90	5	1.3	1.5	3	5	1	27.66
83405	15	18	1/2	90	5	1.3	1.5	3		1	29.84
L1 / length: 5.1 cm											
83407	20	22	3/4	90	5.4	1.7	1.6	3.3		1	42.80

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset (silicone-free)

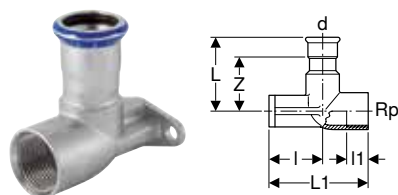

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm										
83423	12 / 15	15	1/2	90	5	3.5	1.5	3	1	27.44
83425	15	18	1/2	90	5	3.5	1.5	3	1	29.58
83427	20	22	3/4	90	5.4	3.1	1.6	3.3	1	42.46



Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Therm
- Suitable exclusively for liquid media

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Operating pressure	≤ 16 bar
Operating temperature	-30 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	D [cm]	La [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33932	12	15	2.6	7	15.1	11.1			1	137.46
33933	15	18	2.6	7	14.7	10.7			1	145.18
33934	20	22	3.1	11	10.6	6.4			1	167.67
33935	25	28	3.9	13	12	7.4	5		1	181.08
33936	32	35	4.6	13	13.9	8.7		5	1	203.55
33937	40	42	5.9	13	14.9	8.9			1	365.64
33938	50	54	7	18	17.6	10.6			1	416.57
33939	65	76.1	8.8	22	26.2	15.6			1	517.78
33940	80	88.9	11.7	23	28.6	16.6			1	582.20
33941	100	108	14.4	23	54.2	39.2			1	1182.77

Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	I [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	71.71
90981	15	18	3	45	16.5		1	73.46
90982	20	22	3.4	45	16.5		1	77.06
90983	25	28	3.8	45	16.5		1	84.22
90984	32	35	4.5	45	16.5		1	102.13
90985	40	42	5.4	45	16.5		1	121.85
90986	50	54	7	45	16.5		1	134.42
90987	65	76.1	8.9	45	16.5		1	304.60
90988	80	88.9	10.8	45	16.5		1	340.49
90989	100	108	13.3	45	16.5		1	376.32

Geberit Mapress Stainless Steel, FKM, blue

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo

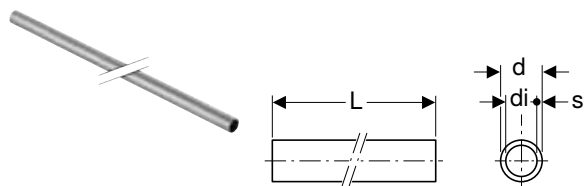

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.		DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 3 m									
39031	N	12	15	13	1	420	60		18.20
39032	N	15	18	16	1	210			21.74
39033	N	20	22	19.6	1.2	210			29.82
39034	N	25	28	25.6	1.2	90			36.13
39035	N	32	35	32	1.5	90			53.81
39036	N	40	42	39	1.5	90			63.89
39037	N	50	54	51	1.5	90			82.46
39038	N	65	76.1	72.1	2	72			170.51
39039	N	80	88.9	84.9	2	48			193.61
39040	N	100	108	104	2	39			249.11
L / length: 6 m									
39002		12	15	13	1	840	120		14.14
39003		15	18	16	1	420	60		16.69
39004		20	22	19.6	1.2	420	60		22.57
39005		25	28	25.6	1.2	180	60		27.82
39006		32	35	32	1.5	180	30		40.99
39007		40	42	39	1.5	180	30		50.41
39008		50	54	51	1.5	180	30		64.16
39009		65	76.1	72.1	2	144		6	130.02
39010		80	88.9	84.9	2	96		6	148.13
39011		100	108	104	2	78		6	178.41

N: New, available as of April 2025


Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339



Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	4.10
32051	15	18	16	1	5	5	1	4.44
32052	20	22	19.6	1.2	5.2	5	1	4.74
32053	25	28	25.6	1.2	5.6	5	1	6.05
32054	32	35	32	1.5	6.2		1	7.76
32055	40	42	39	1.5	8		1	10.99
32056	50	54	51	1.5	9		1	14.24
32057	65	76.1	72.1	2	13.6		1	58.69
32058	80	88.9	84.9	2	15		1	68.42
32059	100	108	104	2	18		1	95.77

Couplings

Geberit Mapress Stainless Steel coupling (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50062	12	15	4.8	0.8	5		10.89
50063	15	18	4.8	0.8	5		12.21
50064	20	22	5	0.8	5		14.63
50065	25	28	5.4	0.8	5		16.67
50066	32	35	6.2	1	5		20.79
50067	40	42	7.1	1.1	5		28.94
50068	50	54	8.3	1.3	5		38.55
50071	65	76.1	12.7	2.1		1	157.48
50072	80	88.9	14.5	2.5		1	180.45
50073	100	108	17.6	2.6		1	259.44

Geberit Mapress Stainless Steel slip coupling (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50082	12	15	2.5	8	3	5		16.53
50083	15	18	2.5	8	3	5		17.66
50084	20	22	2.5	8.4	3.4	5		20.64
50085	25	28	3	9.1	3.1	5		23.87
50086	32	35	3	10.2	4.2	5		27.46
50087	40	42	4	12	4	5		33.59
50088	50	54	4	14	6	5		45.94
50091	65	76.1	6	23	11		1	213.49
50092	80	88.9	7	26	12		1	242.78
50093	100	108	8	31	15		1	325.00

Reducers

Geberit Mapress Stainless Steel reducer with plain end (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Concentric
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50133	15 / 12	18	15	5.5	3.5	5		10.98
50134	20 / 12	22	15	5.9	3.9	5		11.82
50135	20 / 15	22	18	5.7	3.7	5		11.82
50136	25 / 12	28	15	6.6	4.6	5		13.72
50137	25 / 15	28	18	6.4	4.4	5		13.72
50138	25 / 20	28	22	6	3.9	5		13.72
50141	32 / 20	35	22	7.1	5	5		22.40
50142	32 / 25	35	28	6.8	4.5	5		22.40
50145	40 / 20	42	22	8.2	6.1	5		40.44
50146	40 / 25	42	28	8.3	6	5		40.44
50147	40 / 32	42	35	7.7	5.1	5		40.44
50150	50 / 20	54	22	9.5	7.4	5		56.79
50151	50 / 25	54	28	11	8.7	5		56.79
50152	50 / 32	54	35	10.6	8	5		56.79
50153	50 / 40	54	42	9.2	6.2	5		56.79
50164	65 / 50	76.1	54	14.6	11.1		1	126.82
50167	80 / 50	88.9	54	16.2	12.8		1	133.79
50168	80 / 65	88.9	76.1	16.1	10.8		1	133.79
50169	100 / 50	108	54	17.2	13.7		1	148.82
50171	100 / 65	108	76.1	18.4	13.1		1	148.82
50172	100 / 80	108	88.9	20.3	14.3		1	148.82



Bends

Geberit Mapress Stainless Steel bend (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
50222	12	15	2.8	0.8	5		15.17
50223	15	18	2.9	0.9	5		17.18
50224	20	22	3.2	1.1	5		21.20
50225	25	28	3.7	1.4	5		26.34
50226	32	35	4.3	1.7	5		40.24
50227	40	42	5.1	2.1	5		62.13
50228	50	54	6.2	2.7	5		84.81
50231	65	76.1	10.3	5		1	216.94
50232	80	88.9	11.7	5.7		1	271.65
50233	100	108	14.3	6.8		1	400.02
arc / angle: 90°							
50282	12	15	4.9	2.9	5		15.17
50283	15	18	5.3	3.3	5		17.18
50284	20	22	6.1	4	5		21.20
50285	25	28	5.7	3.4	5		26.34
50286	32	35	6.8	4.2	5		40.24
50287	40	42	8	5	5		59.18
50288	50	54	10	6.5	5		84.81
50291	65	76.1	15.9	10.6		1	216.94
50292	80	88.9	18.5	12.5		1	271.65
50293	100	108	23	15.5		1	400.02

Geberit Mapress Stainless Steel bend with plain end (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
50242	12	15	2.8	3.6	0.8	5		15.17
50243	15	18	2.9	3.6	0.9	5		17.18
50244	20	22	3.2	4	1.1	5		21.20
50245	25	28	3.7	4.4	1.4	5		26.34
50246	32	35	4.3	5	1.7	5		40.24
50247	40	42	5.1	5.9	2.1	5		62.13
50248	50	54	6.2	7	2.7	5		84.81
50251	65	76.1	10.3	11.1	5		1	216.94
50252	80	88.9	11.7	12.8	5.7		1	271.65
50253	100	108	14.3	15.8	6.8		1	400.02
arc / angle: 90°								
50312	12	15	4.9	5.9	2.9	5		15.17
50313	15	18	5.3	6.1	3.3	5		17.18
50314	20	22	6.1	7	4	5		21.20
50315	25	28	5.7	6.3	3.4	5		26.34
50316	32	35	6.8	7.4	4.2	5		40.24
50317	40	42	8	8.8	5	5		59.18
50318	50	54	10	10.8	6.5	5		84.81
50321	65	76.1	15.9	16.7	10.6		1	216.94
50322	80	88.9	18.5	19.5	12.5		1	271.65
50323	100	108	23	24.1	15.5		1	400.02



Geberit Mapress Stainless Steel bend with plain ends



click & scan

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
30892	12	15	4	11	0	7				1	14.17
30893	15	18	4	11.2	0	7.1				1	14.47
30894	20	22	4.1	11.4	0	7.3				1	15.32
30905	25	28	4.3	11.9	0	7.6			5	1	15.87
30906	32	35	4.1	11.8	0	7.7				1	33.26
30907	40	42	4.7	13.7	0	9				1	40.93
30908	50	54	5.5	14.9	0	9.4				1	51.19
30009	65	76.1	8.4	20.4	0	12				1	160.37
30010	80	88.9	9.5	22	0	12.5				1	180.87
30011	100	108	11.7	25.4	0	13.7				1	216.70
arc / angle: 30°											
30932	12	15	4.3	11.3	0	7				1	14.17
30933	15	18	4.4	11.6	0	7.1				1	14.47
30934	20	22	4.6	11.8	0	7.2			5	1	15.32
30935	25	28	4.8	12.4	0	7.6			5	1	15.87
30936	32	35	4.6	12.3	0	7.7				1	33.26
30937	40	42	5.4	14.4	0	9				1	40.93
30938	50	54	6.3	15.7	0	9.4				1	51.19
30029	65	76.1	9.7	21.7	0	12				1	160.37
30030	80	88.9	11.1	23.6	0	12.5				1	180.87
30031	100	108	13.6	27.3	0	13.7				1	216.70
arc / angle: 45°											
30872	12	15	4.5	11.6	0	7.1			5	1	14.17
30873	15	18	4.2	11.7	0	7.5				1	14.47
30874	20	22	5.2	12.3	0	7.1				1	15.32
30875	25	28	5.6	13.1	0	7.5				1	15.87
30876	32	35	5.3	12.9	0	7.6				1	33.26
30877	40	42	6.1	15.1	0	9				1	40.93
30878	50	54	7.3	16.7	0	9.4				1	51.19
30049	65	76.1	11.1	23	0	11.9				1	160.37
30050	80	88.9	13	25.2	0	12.2				1	180.87
30051	100	108	15.7	29.4	0	13.7				1	216.70
arc / angle: 60°											
30942	12	15	5	12	0	7				1	14.17
30943	15	18	5.3	12.4	0	7.1				1	14.47
30944	20	22	5.6	12.8	0	7.2				1	15.32
30955	25	28	6.1	13.7	0	7.6				1	15.87
30956	32	35	5.9	13.6	0	7.7				1	33.26
30957	40	42	6.9	15.9	0	9				1	40.93
30958	50	54	8.3	17.7	0	9.4				1	51.19
30069	65	76.1	12.6	24.6	0	12				1	160.37
30070	80	88.9	14.6	27.1	0	12.5				1	180.87
30071	100	108	18	31.7	0	13.7				1	216.70
arc / angle: 90°											
30402	12	15	5.9	12.9	0	7	5600	50	10		14.17
30403	15	18	6.1	13.3	0	7.2		50	10		14.47
30404	20	22	7	14.2	0	7.2		50	10		15.32
30405	25	28	7.9	15.5	0	7.6		50	10		15.87
30406	32	35	7.7	15.4	0	7.7			5	1	33.26
30407	40	42	9	18	0	9			5	1	40.93
30408	50	54	11.1	20.5	0	9.4			5	1	51.19
30089	65	76.1	16.6	28.6	0	12				1	160.37
30090	80	88.9	19.4	31.9	0	12.5				1	180.87
30091	100	108	24	37.7	0	13.7				1	216.70

Geberit Mapress Stainless Steel pipe bridge



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	30	6	16.5	3.2	25	5		12.21
30803	15	18	30	6	16.6	3.3	25	5		12.63
30804	20	22	30	6	16.8	3.5	25	5		14.33
30805	25	28	30	6	17.9	3.8			1	17.39

T-pieces

Geberit Mapress Stainless Steel T-piece, equal (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50332	12	15	90	6.4	3.9	3.2	1.2	1.9	5		23.30
50333	15	18	90	6.8	4.1	3.4	1.4	2.1	5		27.38
50334	20	22	90	7.4	4.4	3.7	1.6	2.3	5		30.70
50335	25	28	90	8.4	5	4.2	1.9	2.7	5		35.72
50336	32	35	90	10	5.7	5	2.4	3.1	5		45.32
50337	40	42	90	11.4	6.5	5.7	2.7	3.5	5		64.32
50338	50	54	90	13.8	7.7	6.9	3.4	4.2	5		79.89
50341	65	76.1	90	23	11	11.5	6.2	5.7		1	395.61
50342	80	88.9	90	26	12.7	13	7	6.7		1	442.29
50343	100	108	90	31	15.3	15.5	8	7.8		1	606.69

Geberit Mapress Stainless Steel T-piece, reduced (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50356	15 / 12 / 15	18	15	18	90	6.8	4.1	3.4	3.4	1.4	2.1	1.4	5		24.79
50357	20 / 12 / 20	22	15	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5		27.68
50359	20 / 15 / 20	22	18	22	90	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5		27.68
50362	25 / 12 / 25	28	15	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5		33.17
50364	25 / 15 / 25	28	18	28	90	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5		33.17
50366	25 / 20 / 25	28	22	28	90	8.4	4.7	4.2	4.2	1.9	2.6	1.9	5		33.17
50367	32 / 12 / 32	35	15	35	90	10	4.9	5	5	2.4	2.9	2.4	5		40.66
50368	32 / 15 / 32	35	18	35	90	10	4.9	5	5	2.4	2.9	2.4	5		41.35
50369	32 / 20 / 32	35	22	35	90	10	5	5	5	2.4	2.9	2.4	5		41.35
50370	32 / 25 / 32	35	28	35	90	10	5.3	5	5	2.4	3	2.4	5		41.35
50371	40 / 12 / 40	42	15	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7	5		59.70
50372	40 / 15 / 40	42	18	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7	5		59.70
50373	40 / 20 / 40	42	22	42	90	11.4	5.4	5.7	5.7	2.7	3.3	2.7	5		59.70
50374	40 / 25 / 40	42	28	42	90	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5		59.70
50375	40 / 32 / 40	42	35	42	90	11.4	6.1	5.7	5.7	2.7	3.5	2.7	5		59.70
50376	50 / 12 / 50	54	15	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4	5		75.18
50377	50 / 15 / 50	54	18	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4	5		75.18
50378	50 / 20 / 50	54	22	54	90	13.8	6	6.9	6.9	3.4	3.9	3.4	5		71.60
50379	50 / 25 / 50	54	28	54	90	13.8	6.3	6.9	6.9	3.4	4	3.4	5		71.60
50380	50 / 32 / 50	54	35	54	90	13.8	6.7	6.9	6.9	3.4	4.1	3.4	5		71.60
50381	50 / 40 / 50	54	42	54	90	13.8	7.1	6.9	6.9	3.4	4.1	3.4	5		71.60
50389	65 / 20 / 65	76.1	22	76.1	90	23	7.2	11.5	11.5	6.2	5.1	6.2		1	334.73
50390	65 / 25 / 65	76.1	28	76.1	90	23	7.5	11.5	11.5	6.2	5.2	6.2		1	334.73
50391	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2		1	334.73
50392	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2		1	334.73
50393	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2		1	334.73
50395	80 / 20 / 80	88.9	22	88.9	90	26	7.8	13	13	7	5.7	7		1	372.73
50396	80 / 25 / 80	88.9	28	88.9	90	26	8.1	13	13	7	5.8	7		1	372.73
50397	80 / 32 / 80	88.9	35	88.9	90	26	8.5	13	13	7	5.9	7		1	372.73
50398	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7		1	372.73
50399	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7		1	372.73
50401	100 / 20 / 100	108	22	108	90	31	8.8	15.5	15.5	8	6.7	8		1	487.41
50402	100 / 25 / 100	108	28	108	90	31	9.1	15.5	15.5	8	6.8	8		1	487.41
50403	100 / 32 / 100	108	35	108	90	31	9.5	15.5	15.5	8	6.9	8		1	487.41
50404	100 / 40 / 100	108	42	108	90	31	9.9	15.5	15.5	8	6.9	8		1	487.41
50405	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8		1	487.41
50407	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8		1	487.41
50408	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8		1	487.41

Geberit Mapress Stainless Steel T-piece with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50413	12 / 15 / 12	15	1/2	15	90	6.4	4	3.2	3.2	1.2	2.7	1.2	5		24.07
50414	15	18	1/2	18	90	6.8	4.2	3.4	3.4	1.4	2.9	1.4	5		24.70
50415	15 / 20 / 15	18	3/4	18	90	6.8	4.4	3.4	3.4	1.4	2.9	1.4	5		24.70
50416	20 / 15 / 20	22	1/2	22	90	7.4	4.3	3.7	3.7	1.6	3	1.6	5		29.44
50417	20	22	3/4	22	90	7.4	4.6	3.7	3.7	1.6	3.1	1.6	5		29.44
50418	25 / 15 / 25	28	1/2	28	90	8.4	4.6	4.2	4.2	1.9	3.3	1.9	5		33.87
50419	25 / 20 / 25	28	3/4	28	90	8.4	4.9	4.2	4.2	1.9	3.4	1.9	5		33.87
50420	25	28	1	28	90	8.4	5.3	4.2	4.2	1.9	3.6	1.9	5		28.04
50421	32 / 15 / 32	35	1/2	35	90	10	5	5	5	2.4	3.7	2.4	5		40.52
50422	32 / 20 / 32	35	3/4	35	90	10	5.3	5	5	2.4	3.8	2.4	5		40.52
50424	40 / 15 / 40	42	1/2	42	90	11.4	5.3	5.7	5.7	2.7	4	2.7	5		47.19
50425	40 / 20 / 40	42	3/4	42	90	11.4	5.6	5.7	5.7	2.7	4.1	2.7	5		47.19
50427	50 / 15 / 50	54	1/2	54	90	13.8	5.9	6.9	6.9	3.4	4.6	3.4	5		60.31
50428	50 / 20 / 50	54	3/4	54	90	13.8	6.2	6.9	6.9	3.4	4.7	3.4	5		60.31
50429	50	54	2	54	90	13.8	7.9	6.9	6.9	3.4	5.6	3.4	5		63.33
50437	65 / 20 / 65	76.1	3/4	76.1	90	23	7.4	11.5	11.5	6.2	5.9	6.2		1	325.58
50438	65 / 50 / 65	76.1	2	76.1	90	23	9.1	11.5	11.5	6.2	6.8	6.2		1	325.58
50440	80 / 20 / 80	88.9	3/4	88.9	90	26	8	13	13	7	6.5	7		1	349.44
50441	80 / 50 / 80	88.9	2	88.9	90	26	9.7	13	13	7	7.4	7		1	349.44
50443	100 / 20 / 100	108	3/4	108	90	31	9	15.5	15.5	8	7.5	8		1	445.33
50444	100 / 50 / 100	108	2	108	90	31	10.7	15.5	15.5	8	8.4	8		1	445.33

Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50462	25 / 32	28	1 1/4	4.8	2.5	5		27.05
50472	80	88.9	3	13.7	7.7		1	482.43
50474	32 / 40	35	1 1/2	5.3	2.7	5		38.01
50453	12 / 15	15	1/2	4.1	2.1	5		17.44
50454	12 / 20	15	3/4	4.3	2.3	5		17.44
50455	15	18	1/2	4.2	2.2	5		19.52
50456	15 / 20	18	3/4	4.4	2.4	5		19.52
50457	20 / 15	22	1/2	4.2	2.1	5		21.60
50458	20	22	3/4	4.4	2.3	5		21.60
50459	20 / 25	22	1	4.6	2.5	5		21.60
50460	25 / 20	28	3/4	4.6	2.3	5		27.05
50461	25	28	1	4.8	2.3	5		27.05
50463	32 / 25	35	1	5.1	2.5	5		38.01
50464	32	35	1 1/4	5.3	2.7	5		38.01
50465	40 / 32	42	1 1/4	5.7	2.7	5		56.64
50466	40	42	1 1/2	5.7	2.7	5		56.64
50467	50 / 40	54	1 1/2	8.3	4.8	5		78.81
50468	50	54	2	8.9	5.4	5		78.81
50471	65	76.1	2 1/2	12.3	7		1	344.11

Geberit Mapress Stainless Steel adaptor with male thread and plain end



click & scan

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12 / 15	15	1/2	5.7	25	5		15.32
31933	15	18	1/2	5.7	25	5		17.02
31936	20	22	3/4	5.9	25	5		18.75
31937	25	28	1	6.6	25	5		23.87
31938	32	35	1 1/4	8		5	1	34.12
31939	40	42	1 1/2	9.1		5	1	50.48
31940	50	54	2	10.2		5	1	68.23

Geberit Mapress Stainless Steel adaptor with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
50480	25 / 32	28	1 1/4	4.6	0.4	5	27.05
50484	12 / 15	15	1/2	3.7	0.4	5	17.44
50485	12 / 20	15	3/4	3.8	0.3	5	17.44
50486	15	18	1/2	3.7	0.4	5	19.52
50487	15 / 20	18	3/4	3.8	0.3	5	19.52
50488	20 / 15	22	1/2	3.6	0.2	5	21.60
50489	20	22	3/4	3.9	0.3	5	21.60
50490	20 / 25	22	1	4.2	0.4	5	21.60
50491	25 / 15	28	1/2	3.8	0.2	5	27.05
50492	25 / 20	28	3/4	3.9	0.3	5	27.05
50493	25	28	1	4.4	0.4	5	27.05
50494	32 / 25	35	1	4.5	0.2	5	38.01
50495	32	35	1 1/4	4.9	0.4	5	38.01
50498	40	42	1 1/2	5.3	0.4	5	56.64
50500	50	54	2	6.2	0.4	5	78.81

Geberit Mapress Stainless Steel adaptor with female thread and plain end



click & scan

Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	5.8	4.5	5		1	21.70
33848	25 / 15	28	1/2	6.6	5.3		5	1	28.28
33850	32 / 15	35	1/2	6.9	5.6			1	37.47
33852	40 / 15	42	1/2	7.4	6.1		5	1	48.01
33854	50 / 15	54	1/2	7.9	6.6		5	1	57.20
33860	65 / 15	76.1	1/2	10.4	9.1			1	199.87
33862	80 / 15	88.9	1/2	11.3	10			1	284.02
33864	100 / 15	108	1/2	13.4	12.1			1	342.50

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------



Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12 / 15	15	1/2	14.8	13.5	9	5	1	15.32
90933	15	18	1/2	14.8	13.5	9	5	1	17.02
90934	15 / 20	18	3/4	15.2	13.3	9		1	17.02
90935	20 / 15	22	1/2	14.8	13.9	8.9	5		18.75
90936	20	22	3/4	15.2	13.7	8.7	5	1	18.75

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
50534	40	42	1 1/2	90	8.3	6.7	5.3	5	78.20
50535	50	54	2	90	9.4	7.8	5.9	5	104.19
50524	12 / 15	15	1/2	90	5.7	3.7	3.7	5	24.63
50526	15	18	1/2	90	5.7	3.9	3.7	5	26.74
50529	20	22	3/4	90	6	4.6	3.9	5	34.36
50532	25	28	1	90	6.7	5.4	4.4	5	43.68
50533	32	35	1 1/4	90	7.5	6.3	4.9	5	58.52

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (FKM, blue)

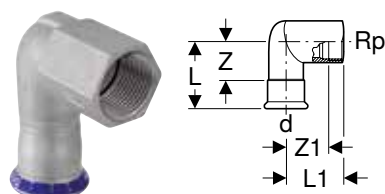

click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	GBP/pc.
50544	12 / 15	15	1/2	90	5.7	3.7	3.7	2.4	5	23.67
50546	15	18	1/2	90	5.7	3.9	3.7	2.6	5	29.89
50549	20	22	3/4	90	6	4.6	3.9	3.1	5	34.36
50552	25	28	1	90	6.7	5.4	4.3	3.7	5	43.68
50553	32	35	1 1/4	90	7.5	6.3	4.9	4.4	5	58.52

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	90	3.6	5.3	2.3	25	5	21.32

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
50772	12	15	3/4	6.6	2.6	5	57.69
50773	15	18	3/4	6.9	2.9	5	65.66
50774	20	22	1	7.2	3	5	81.53
50775	25	28	1 1/4	7.7	3.1	5	123.71
50776	32	35	1 1/2	8.2	3	5	130.80
50777	40	42	1 3/4	9.5	3.5	5	188.51
50778	50	54	2 3/8	11.3	4.3	5	312.82

Geberit Mapress Stainless Steel adaptor union with male thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
50562	12 / 15	15	1/2	3/4	6.4	4.4	5	28.56
50564	15	18	1/2	3/4	6.4	4.4	5	30.97
50565	15 / 20	18	3/4	3/4	6.6	4.6	5	32.57
50566	20 / 15	22	1/2	1	6.7	4.6	5	32.66



Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
50567	20	22	3/4	1	6.8	4.7	5	32.66
50568	20 / 25	22	1	1	7.3	5.2	5	34.30
50570	25	28	1	1 1/4	7.8	5.5	5	53.74
50571	32	35	1 1/4	1 1/2	8.5	5.9	5	69.88
50572	40	42	1 1/2	1 3/4	9	6	5	84.62
50573	50	54	2	2 3/8	10.3	6.8	5	146.27

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
50581	12 / 15	15	1/2	3/4	6.4	4.4	5	39.00
50582	12 / 20	15	3/4	3/4	6.6	4.6	5	39.00
50583	15	18	1/2	3/4	6.4	4.4	5	44.68
50584	15 / 20	18	3/4	3/4	6.6	4.6	5	44.68
50585	20 / 15	22	1/2	1	6.7	4.6	5	46.93
50586	20	22	3/4	1	6.8	4.7	5	46.93
50587	20 / 25	22	1	1	7.3	5.2	5	46.93
50588	25	28	1	1 1/4	7.8	5.5	5	70.77
50589	32	35	1 1/4	1 1/2	8.5	5.9	5	94.43
50590	40	42	1 1/2	1 3/4	9	6	5	109.74
50591	50	54	2	2 3/8	10.3	6.8	5	188.71

Geberit Mapress Stainless Steel adaptor union with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
50611	12 / 15	15	1/2	3/4	5.9	2.6	5	30.01
50612	12 / 20	15	3/4	3/4	6.1	2.6	5	27.49
50613	15	18	1/2	3/4	5.9	2.6	5	32.57
50615	20	22	3/4	1	6.3	2.7	5	34.30
50616	20 / 25	22	1	1	6.6	2.8	5	34.30
50617	25	28	1	1 1/4	7.1	3.1	5	56.41
50618	32	35	1 1/4	1 1/2	7.7	3.2	5	73.35
50619	40	42	1 1/2	1 3/4	8.2	3.3	5	95.63
50620	50	54	2	2 3/8	9.5	3.7	5	159.18

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11


Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Technical data								
Product material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
50631	12 / 15	15	1/2	3/4	5.9	2.6	5	39.00
50632	12 / 20	15	3/4	3/4	6.1	2.6	5	39.00
50633	15	18	1/2	3/4	5.9	2.6	5	44.68
50634	15 / 20	18	3/4	3/4	6.1	2.6	5	44.68
50635	20	22	3/4	1	6.3	2.7	5	46.93
50636	20 / 25	22	1	1	6.6	2.8	5	46.93
50637	25	28	1	1 1/4	7.1	3.1	5	70.77
50638	32	35	1 1/4	1 1/2	7.7	3.2	5	94.43
50639	40	42	1 1/2	1 3/4	8.2	3.3	5	109.74
50640	50	54	2	2 3/8	9.5	3.7	5	188.71

Geberit Mapress Stainless Steel adaptor with union nut (FKM, blue)

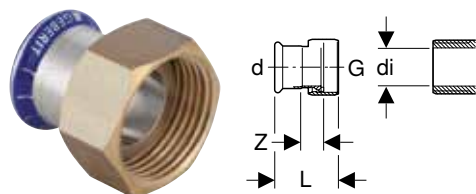

click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material		CrNiMo steel 1.4401 (EN 10088)						
Art. no.	DN	d, Ø [mm]	G ["]	di, Ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
50653	12	15	3/4	13	3.7	1.1	5	21.03
50656	15	18	3/4	13	3.7	1.1	5	22.26
50661	20	22	1	20	4	1.1	5	30.79
50664	25	28	1	20	4	1.3	5	40.10
50665	25	28	1 1/4	26	4.4	1.3	5	40.10
50667	32	35	1 1/2	32	4.8	1.3	5	44.21



Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



click & scan

Application purposes

- Suitable exclusively for liquid media

Characteristics

- Not admissible for drinking water installations

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	20.11
22431	12	20	15	6.7	5.2	10	2	23.45
22422	15	16	18	6.4	4.9	10	2	21.81
22432	15	20	18	6.7	5.2	10	2	25.15
22423	20	16	22	6.8	5.9	10	2	23.45
22433	20	20	22	6.8	5.9	10	2	26.80
22444	25	25	28	6.8	5.9	10	2	36.85



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (FKM, blue)

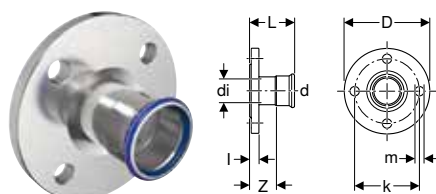

click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
50673	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16		1	68.78
50674	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	81.52
50675	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	99.54
50676	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	140.16
50677	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	165.30
50678	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	205.54
50679	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	331.66
50680	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	394.30
50681	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	484.93

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

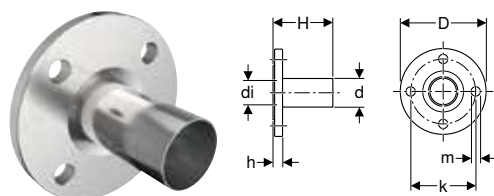

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	72.08
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	88.13
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	124.45
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	145.99
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	72	1	257.45
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	294.73
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	345.01
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	413.34

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6

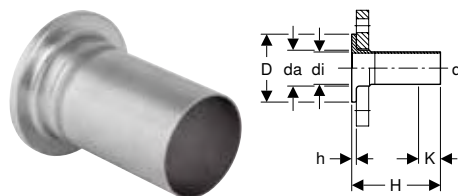

click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	3.7	6		1	93.66
36151	32	35	40	32	7	13.5	0.6	2.7	6		1	134.82
36152	40	42	47	39	8	13.5	0.6	0	6		1	157.33
36153	50	54	59	51	9	13.5	0.8	0	6		1	194.78
36154	65	76.1	78	73.1	11	13.5	0.8	0	6		1	307.14
36155	80	88.9	91	84.9	12.8	13.5	1	0	6	96	1	359.58
36156	100	108	110	104	14.8	13.5	1	0	6	75	1	430.79

To order additionally


- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 6 → p. 104



Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	87.11
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	106.23
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	153.44
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	178.46
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16		1	220.94
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	348.42
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	407.91
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	488.62

To order additionally


- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Sealings

Geberit Mapress Stainless Steel cap (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50752	12	15	2.3	0.3	5		15.65
50753	15	18	2.3	0.3	5		18.84
50754	20	22	2.4	0.3	5		20.71
50755	25	28	2.6	0.3	5		25.01
50756	32	35	2.9	0.3	5		34.43
50757	40	42	3.3	0.3	5		72.47
50758	50	54	3.8	0.3	5		82.50
50761	65	76.1	6	0.7		1	117.60
50762	80	88.9	6.7	0.7		1	145.08
50763	100	108	8.2	0.7		1	234.60

Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	D [cm]	L [cm]	l [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	71.71
90981	15	18	3	45	16.5		1	73.46
90982	20	22	3.4	45	16.5		1	77.06
90983	25	28	3.8	45	16.5		1	84.22
90984	32	35	4.5	45	16.5		1	102.13
90985	40	42	5.4	45	16.5		1	121.85
90986	50	54	7	45	16.5		1	134.42
90987	65	76.1	8.9	45	16.5		1	304.60
90988	80	88.9	10.8	45	16.5		1	340.49
90989	100	108	13.3	45	16.5		1	376.32

Accessories for Geberit Mapress Stainless Steel

Pipe fastenings

Geberit double nipple M10 / G 1/2"



[click & scan](#)

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.79

Geberit threaded rod



[click & scan](#)

Application purposes

- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings


Characteristics

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	16.76



Geberit threaded pipe



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	115	2	1	36.07

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.50

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	4.04

Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

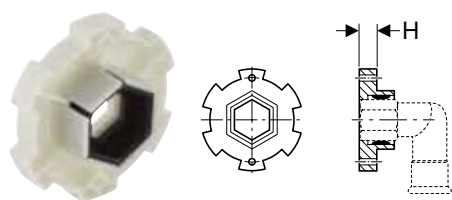

click & scan

Application purposes

- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptors with female thread Rp 1/2"
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread Rp 1/2"

Characteristics

- Sound-absorbing

Technical data

Product material	Duroplast
------------------	-----------

Art. no.	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90282	1.3	5	1	9.88

System seals

Geberit Mapress seal ring, CIIR, black



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.46
90402	12	15	50	10		0.46
90403	15	18	50	10		0.59
90404	20	22	50	10		0.59
90405	25	28	50	10		0.64
90406	32	35	50	10		0.64
90407	40	42		10		0.94
90408	50	54		10		0.94
90409	65	76.1			1	2.60
90410	80	88.9			1	3.54
90411	100	108			1	6.87



Geberit Mapress seal ring, FKM, blue



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 – +140 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.72
90882	12	15	100	10	1.15
90883	15	18	100	10	1.39
90884	20	22	100	10	1.66
90885	25	28	100	10	1.96
90886	32	35	100	10	2.28
90887	40	42	100	10	4.18
90888	50	54	100	10	5.85
90891	65	76.1	50	5	17.26
90892	80	88.9	50	5	21.47
90893	100	108	25	5	47.87



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C

Geberit Mapress seal ring FKM, white



click & scan

Application purposes

- For saturated steam
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11

Characteristics


- Silicone-free (LABS-free)

Technical data

Operating temperature	5–155 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
91152	12	15	50	10	1.53
91153	15	18	50	10	1.84
91154	20	22	50	10	2.17
91155	25	28	50	10	2.54
91156	32	35	50	10	2.98
91157	40	42	50	10	5.48
91158	50	54	50	10	7.61
91159	65	76.1	50	10	27.25
91160	80	88.9	50	10	38.15
91161	100	108	50	10	65.41

Geberit Mapress flat gasket, EPDM, black

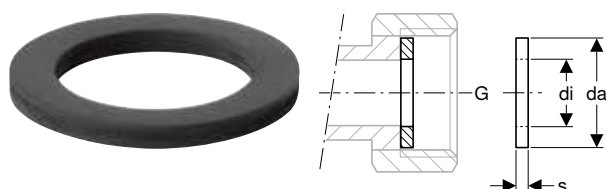

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221


Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da, ø [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.33
90081	3/4	24	13	2	50	10	0.33
90082	1	30	19.6	2		10	0.33
90083	1 1/4	39	25.6	2		10	0.53
90084	1 1/2	45	32	2		10	0.72
90085	1 3/4	50	39	2		10	0.85
90086	2 3/8	66	51	3		10	1.76
90220	N 2 1/2	72	54	3		10	4.02
90079	N 2 3/4	78	57	3		10	4.10
90088	3	84.7	76	3		10	2.66
90089	3 1/2	97	84	3		10	3.14

N: New, available as of January 2025

Geberit Mapress flat gasket, FPM, green

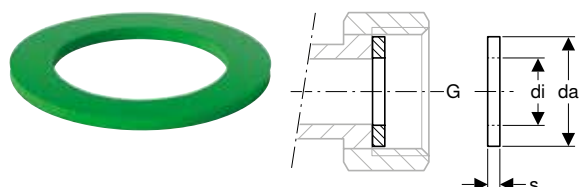

click & scan

Application purposes

- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +140 °C
Product material	FPM

Art. no.	G ["]	da, ø [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.87
90094	1	30	19.6	2	10	3.32
90095	1 1/4	39	25.6	2	10	1.43
90096	1 1/2	45	32	2	10	1.76
90097	1 3/4	50	39	2	10	2.49
90098	2 3/8	66	51	2	10	4.55



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C



Geberit Mapress flat gasket fibre composite material



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.079.00.1	1/2	18.4	10	2	5	1.22
600.080.00.1	3/4	23.9	13	2	5	1.45
600.081.00.1	1	30	19.6	2	5	1.60
600.082.00.1	1 1/8	34.7	21	2	5	1.70
600.083.00.1	1 1/4	38	25	2	5	1.94
600.084.00.1	1 1/4	38.7	25.6	2	5	1.94
600.085.00.1	1 1/2	44.6	32	2	5	2.10
600.087.00.1	1 3/4	50.5	39	2	5	2.30
600.088.00.1	2	56.4	42	2	5	2.42
600.089.00.1	2 1/4	62.5	42	2	5	2.54
600.090.00.1	2 3/8	66.2	51	2	5	2.90
600.091.00.1	2 1/2	72	54	2	5	3.27
600.092.00.1	2 3/4	78.3	57	2	5	3.63
600.093.00.1	3	84.7	72.1	2	5	3.99
600.094.00.1	3 1/2	97.1	84.9	2	5	4.36

Geberit flange gasket, fibre composite material PN 6



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, ø [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
600.051.00.1	15	44	20	2	6	1	1.81
600.052.00.1	20	54	25	2	6	1	2.03
600.053.00.1	25	64	30	2	6	1	2.42
600.054.00.1	32	76	38	2	6	1	2.87
600.055.00.1	40	86	45	2	6	1	3.43
600.056.00.1	50	96	57	2	6	1	4.06
600.057.00.1	65	116	76	2	6	1	5.10
600.058.00.1	80	132	89	2	6	1	6.12
600.059.00.1	100	152	108	2	6	1	7.32

Geberit flange gasket, fibre composite material PN 10/16



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data


Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, ø [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
600.041.00.1	15	50	20	2	10 / 16		1	2.06
600.044.00.1	32	82	38	2	10 / 16	5	1	3.24
600.045.00.1	40	92	45	2	10 / 16	5	1	3.87
600.046.00.1	50	107	57	2	10 / 16	5	1	4.59
600.047.00.1	65	127	76	2	10 / 16	5	1	5.75
600.048.00.1	80	142	89	2	10 / 16	5	1	6.91
600.049.00.1	100	162	108	2	10 / 16	5	1	8.29



Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



[click & scan](#)

Application purposes

- For flanges made of stainless steel, gunmetal and brass

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.54
91165	10	11	5	3.6	4	2.54
91166	12	14	5	3	4	3.17
91167	12	14	5.5	3.5	4	3.17
91168	12	14	6	4	4	2.42
91169	16	18	5.5	3.3	4	2.87
91170	16	18	6	3.8	4	2.87
91171	16	18	6.5	4.3	4	2.87
91172	16	18	7	4.8	4	2.87
91173	16	18	8	5.8	4	2.87



Geberit Mapress Carbon Steel



Preliminary remarks	109
Application overview – Geberit Mapress Carbon Steel	111
Geberit Mapress Carbon Steel	112
System pipes 1.0034	112
System pipes 1.0215	113
Pipe nipples	114
Couplings	114
Reducers	116
Bends	117
T-pieces	120
Pipe crosses	123
Adaptors, permanent	124
Adaptors and connections, detachable	129
Compensators	134
Sealings	135
T-pieces for heating	135
Connections for heating	136
Geberit Mapress Carbon Steel, FKM, blue	140
System pipes 1.0034	140
System pipes 1.0215	141
Pipe nipples	141
Couplings	142
Reducers	143
Bends	144
T-pieces	146
Adaptors, permanent	148
Adaptors and connections, detachable	151
Sealings	154
Accessories for Geberit Mapress Carbon Steel	155
Pipe fastenings	155
Connector fastenings	156
System seals	157
Sets of bolts for flange connections	161

Preliminary remarks

Introduction to Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel is especially suited for closed heating and cooling circuits. For solar and industrial installations, there is a special range of fittings available.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

There are three types of Carbon Steel pipe available; externally galvanised for closed heating and industrial applications, plastic coated for chilled water applications, and internally and externally galvanised pipe made specifically for wet sprinkler systems.

Geberit Mapress Carbon Steel is not suitable for drinking water or open heating circuits.

Benefits of Geberit Mapress Carbon Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Variety of pipes

Three types of Carbon Steel pipe to suit different applications, including plastic coated for chilled applications.

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Carbon Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Always check that you are using the correct tools.

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress Carbon Steel

Geberit Great Britain, Version: December 2024

Depent Great Britain, version: December 2024

Application purposes	Operating temperature	Maximum operating pressure	Pipes			
			Carbon steel, outside zinc-plated	Carbon steel, outside PP-jacketed	Carbon steel, inside and outside zinc-plated	
Liquid media (closed systems)						
For cooling and heating water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓ ⁷⁾	✓ ⁷⁾		
For cooling and heating water with antifreeze agent	–30 – +120 °C ³⁾	16 bar / 1600 kPa	✓ ⁷⁾	✓ ⁷⁾		
For district heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓ ⁷⁾			
For district heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓ ⁷⁾			
For extinguishing water (wet)	0–100 °C	16 bar / 1600 kPa				
For sprinklers (wet)	0–100 °C	16 / 12 / 10 bar 1600 / 1200 / 1000 kPa ⁶⁾				
For thermal media (solar)	–25 – +220 °C ⁴⁾	10 bar / 1000 kPa	✓ ⁷⁾			
For mineral and lubricating oil	Upon request	Upon request	8)			
For motor fuels (e.g. diesel)	Upon request	Upon request	8)			
Gaseous media						
For compressed air (oil purity class 2–3) ¹⁾	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa ⁶⁾			✓	
For compressed air (oil purity class 3–X) ²⁾	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa ⁶⁾			✓	

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Purity class oil according to ISO 8573-1:2010E; for details on humidity and particles see Technical Information "Geberit piping systems for compressed air installations"

²⁾ Oil purity class in accordance with ISO 8573-1:2010E; For details on moisture and particles, refer to the Technical Information on 'Geberit piping systems for compressed air installations'

³⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

⁴⁾ Lifetime with collector standstill: 200 h/a at 180 °C; 60 h/a at 200 °C; total 500 h/lifetime at 220 °C

⁵⁾ 16 bar / 1600 kPa for d22–54mm, 12 bar / 1200 kPa for d66.7–76.1mm, 10 bar / 1000 kPa for d88.9–108mm

⁶⁾ 25 bar / 2500 kPa for d12–28mm, 16 bar / 1600 kPa for d35–54mm, 12 bar / 1200 kPa for d66.7–108mm

⁷⁾ Closed systems only

⁸⁾ Following Geberit approval



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.


	Fittings		Seal rings		Flat gaskets for screw connections			Flange gaskets
	C-steel red indicator	Brass white indicator	CIIR, black	FKM, blue	EPDM, black	FPM, green	Fibre composite material	Fibre composite material
	✓ ⁷⁾	✓ ⁷⁾	✓ ³⁾		✓ ³⁾		✓	✓
	✓ ⁷⁾	✓ ⁷⁾	✓ ³⁾				✓	✓
	✓ ⁷⁾	✓ ⁷⁾	✓ ³⁾			✓ ³⁾	✓	✓
	✓ ⁷⁾	✓ ⁷⁾		✓ ³⁾			✓	✓
	✓	✓		✓		✓	✓	✓
	8)			8)		8)	8)	8)
	8)			8)		8)	8)	8)
	✓		✓		✓		✓	✓
	✓			✓		✓	✓	✓



Geberit Mapress Carbon Steel

System pipes 1.0034

Geberit Mapress Carbon Steel system pipe, outside zinc-plated

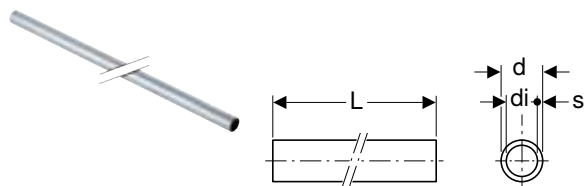

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 6 m								
29101	10	12	9.6	1.2	420	60		4.20
29102	12	15	12.6	1.2	840	120		4.28
29103	15	18	15.6	1.2	840	120		5.15
29104	20	22	19	1.5	840	60		6.84
29105	25	28	25	1.5	420	60		9.35
29106	32	35	32	1.5	420	30		12.41
29107	40	42	39	1.5	420	30		17.01
29108	50	54	51	1.5	420	30		22.08
29158	65	66.7	63.7	1.5	144		6	30.55
29159	65	76.1	72.1	2	144		6	48.66
29160	80	88.9	84.9	2	96		6	55.00
29161	100	108	104	2	78		6	64.24

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

Geberit Mapress Carbon Steel system pipe, plastic-jacketed

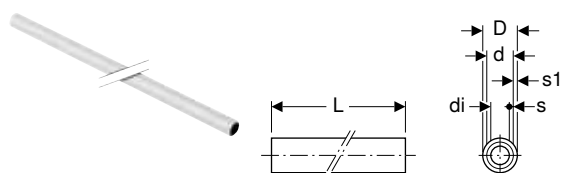

click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated and plastic-jacketed
- Plastic jacketing made of PP, white

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [mm]	s1 [mm]	s [mm]	L [m]	SU3 [m]	GBP/m
19201	10	12	9.6	1.4	0.9	1.2	6	120	5.74
19202	12	15	12.6	1.7	0.9	1.2	6	120	5.86
19203	15	18	15.6	2	0.9	1.2	6	90	6.76
19204	20	22	19	2.4	0.9	1.5	6	60	9.26
19205	25	28	25	3	0.9	1.5	6	60	12.12


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s1 [mm]	s [mm]	L [m]	SU3 [m]	GBP/m
19206	32	35	32	3.7	0.9	1.5	6	30	15.70
19207	40	42	39	4.4	0.9	1.5	6	30	20.26
19208	50	54	51	5.6	0.9	1.5	6	30	26.10

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress stripping tool → p. 339
- Geberit Mapress stripping tool → p. 339
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

System pipes 1.0215

Geberit Mapress Carbon Steel system pipe, inside and outside zinc-plated

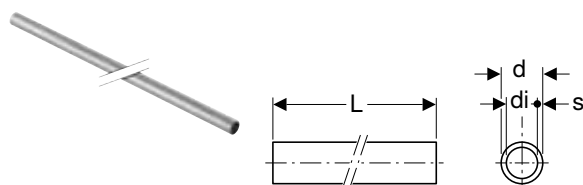

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Sendzimir galvanized

Technical data

Product material	Non-alloy steel 1.0215 E220 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
19402	12	15	12	1.5	6	840	120		3.49
19404	20	22	19	1.5	6	840	60		6.64
19405	25	28	25	1.5	6	420	60		9.36
19406	32	35	32	1.5	6	420	30		11.54
19407	40	42	39	1.5	6	420	30		13.68
19408	50	54	51	1.5	6	420	30		17.56
19409	65	76.1	72.1	2	6	144		6	32.92
19410	80	88.9	84.9	2	6	96		6	40.64
19411	100	108	104	2	6	78		6	52.72

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

Pipe nipples

Geberit Mapress Carbon Steel pipe nipple, outside zinc-plated



[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22050	12	15	12.6	1.2	5		5	1	1.60
22051	15	18	15.6	1.2	5	25	5		1.77
22052	20	22	19	1.5	5.2		5	1	1.87
22053	25	28	25	1.5	5.6	25	5		2.55
22054	32	35	32	1.5	6.2		5	1	4.48
22055	40	42	39	1.5	8		5	1	6.36
22056	50	54	51	1.5	9		5	1	8.21
22057	65	76.1	72.1	2	13.6			1	38.15
22058	80	88.9	84.9	2	15			1	44.67
22059	100	108	104	2	18			1	63.30

Couplings

Geberit Mapress Carbon Steel coupling



[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22001	10	12	4.2	0.8		100	20		3.00
22002	12	15	4.8	0.8		200	20		2.74
22003	15	18	4.8	0.8	8000	200	20		2.98
22004	20	22	5	0.8		200	20		3.47
22005	25	28	5.4	0.8		100	20		4.23
22006	32	35	6.2	1		100	10		7.28
22007	40	42	7.1	1.1		48	4		9.91
22008	50	54	8.3	1.3	768	48	4		11.87
22012	65	66.7	12.7	2.7	480	5		1	46.56
22009	65	76.1	12.7	2.1	320	20		1	65.58
22010	80	88.9	14.5	2.5	320	10		1	76.53
22011	100	108	17.6	2.6	160	10		1	98.37

Geberit Mapress Carbon Steel coupling, reduced


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
22023	40 / 32	42	35	7.9	1.9	4	13.44
22024	50 / 32	54	35	9.3	2.8	4	38.65
22025	50 / 40	54	42	9.2	2.3	4	38.65

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Geberit Mapress Carbon Steel slip coupling


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22101	10	12	2.5	6.7	1.7		75	5		3.22
22102	12	15	2.5	8	3		100	20		3.45
22103	15	18	2.5	8	3		50	10		3.66
22104	20	22	2.5	8.4	3.4		100	20		4.07
22105	25	28	3	9.1	3.1		100	10		5.39
22106	32	35	3	10.2	4.2		50	10		10.96
22107	40	42	4	12	4		48	4		12.30
22108	50	54	4	14	6		24	4		15.90
22112	65	66.7	5	22	12				1	69.70
22109	65	76.1	6	23	11	320	10		1	106.36
22110	80	88.9	7	26	12	160	5		1	120.06
22111	100	108	8	31	15	80	5		1	144.07

Reducers

Geberit Mapress Carbon Steel reducer with plain end



click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22301	12 / 10	15	12	5.1	3.4		150	10		2.43
22302	15 / 10	18	12	5.3	3.6		25	5		2.58
22303	15 / 12	18	15	5.5	3.5		200	20		2.58
22304	20 / 10	22	12	6	4.3		25	5		2.58
22305	20 / 12	22	15	5.9	3.9		200	20		2.58
22306	20 / 15	22	18	5.7	3.7		200	20		2.58
22349	25 / 10	28	12	6.7	5				1	3.45
22307	25 / 12	28	15	6.6	4.6		100	20		3.64
22308	25 / 15	28	18	6.4	4.4		100	20		3.64
22309	25 / 20	28	22	6	3.9		200	20		3.64
22310	32 / 12	35	15	7.5	5.5		50	5		4.22
22311	32 / 15	35	18	7.4	5.5		50	5		4.22
22312	32 / 20	35	22	7.1	5		100	10		4.22
22313	32 / 25	35	28	6.8	4.5		100	5		4.22
22315	40 / 15	42	18	8	6		24	4		9.95
22316	40 / 20	42	22	8.2	6.1		48	4		9.95
22317	40 / 25	42	28	8.3	6		48	4		9.95
22318	40 / 32	42	35	7.7	5.1		48	4		9.95
22320	50 / 15	54	18	9.5	7.5			5	1	19.91
22321	50 / 20	54	22	9.5	7.4		48	4		19.91
22322	50 / 25	54	28	11	8.7		48	4		19.91
22323	50 / 32	54	35	10.6	8		48	4		19.91
22324	50 / 40	54	42	9.2	6.2		48	4		19.91
22327	65 / 50	66.7	54	12.7	9.1	480	5		1	44.58
22330	65 / 40	76.1	42	12.7	9.7		25		1	58.14
22331	65 / 50	76.1	54	14.6	11.1	400	25		1	58.14
22332	65 / 65	76.1	66.7	15.1	10.1		5		1	58.14
22338	80 / 50	88.9	54	16.2	12.8		5		1	70.78
22339	80 / 65	88.9	76.1	16.1	10.8	400	5		1	70.78
22345	100 / 50	108	54	17.2	13.7	250	5		1	76.31
22346	100 / 65	108	76.1	18.4	13.1	200	5		1	76.31
22348	100 / 80	108	88.9	20.3	14.3	200	5		1	76.31

Bends

Geberit Mapress Carbon Steel bend



click & scan



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
20601	10	12	3.2	1.5		100	5		3.69
20602	12	15	3.6	1.6		200	20		4.34
20603	15	18	3.7	1.7		200	20		4.50
20604	20	22	4.2	2.1		100	20		5.53
20605	25	28	4.8	2.5		100	10		7.51
23606	32	35	4.3	1.7		100	5		13.92
23607	40	42	5.1	2.1		48	4		22.04
23608	50	54	6.2	2.7	800	50	2		29.17
20612	65	66.7	9.3	4.2	400	5		1	72.73
20609	65	76.1	10.3	5	240	15		1	98.37
20610	80	88.9	11.7	5.7	160	5		1	118.07
20611	100	108	14.3	6.8	80	5		1	181.22
arc / angle: 90°									
20101	10	12	4.2	2.5		100	20		3.69
20102	12	15	4.9	2.9	8000	200	20		4.04
20103	15	18	5.3	3.3	6000	200	20		4.70
20104	20	22	6.1	4	4000	100	20		5.47
20105	25	28	7.2	4.9	2500	50	10		7.49
23106	32	35	6.8	4.2	2000	50	5		17.89
23107	40	42	8	5	768	48	4		28.59
23108	50	54	10	6.5	384	24	4		34.17
20112	65	66.7	14.1	9.1	250	5		1	73.40
20109	65	76.1	15.7	10.4	160	10		1	104.62
20110	80	88.9	18.4	12.4	160	5		1	132.23
20111	100	108	22.6	15.1	60	5		1	181.22

Geberit Mapress Carbon Steel bend with plain end


click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°										
20701	10	12	3.2	4.1	1.5		100	10		3.69
20702	12	15	3.6	4.5	1.6		200	20		4.34
20703	15	18	3.7	4.2	1.7		200	20		4.50
20704	20	22	4.2	5.2	2.1		100	20		5.53
20705	25	28	4.8	5.6	2.5		100	10		7.51
23706	32	35	4.3	5.3	1.7		100	5		13.92
23707	40	42	5.1	6.1	2.1		48	4		22.04
23708	50	54	6.2	7.3	2.7		48	2		29.17
20709	65	76.1	10.3	11.1	5		15		1	98.37
20710	80	88.9	11.7	12.8	5.7	160	5		1	118.07
20711	100	108	14.3	15.8	6.8	80	5		1	181.22
arc / angle: 90°										
20301	10	12	4.2	5.2	2.5		50	10		3.69
20302	12	15	4.9	5.9	2.9		200	20		4.04
20303	15	18	5.3	6.1	3.3		200	20		4.70
20304	20	22	6.1	7	4		100	20		5.47
20305	25	28	7.2	7.9	4.9	2400	100	10		7.49
23306	32	35	6.8	7.4	4.2	2000	50	5		17.89
23307	40	42	8	8.8	5		48	2		28.59
23308	50	54	10	10.8	6.5	640	20	5		34.17
20309	65	76.1	15.9	16.7	10.6	160	10		1	111.45
20310	80	88.9	18.5	19.5	12.5		5		1	135.53
20311	100	108	23	24.1	15.5	60	5		1	185.27

Geberit Mapress Carbon Steel bend with plain ends 90°

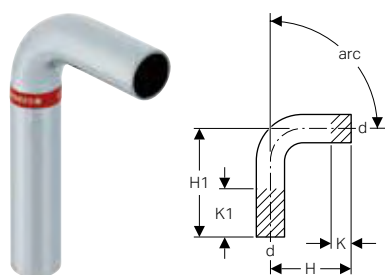

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	arc [°]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20401	10	12	90	4.8	11.9	0	7.1		25	5		3.00
20402	12	15	90	5.9	12.9	0	7		100	20		3.68
20403	15	18	90	6.1	13.3	0	7.2		50	10		3.98
20404	20	22	90	7	14.2	0	7.2	3200	50	10		3.98
20405	25	28	90	7.9	15.5	0	7.6		50	10		4.70
20406	32	35	90	7.7	15.4	0	7.7		25	5		10.91
20407	40	42	90	9	18	0	9			5	1	17.71
20408	50	54	90	11.1	20.5	0	9.4				1	22.40

Geberit Mapress Carbon Steel pipe bridge

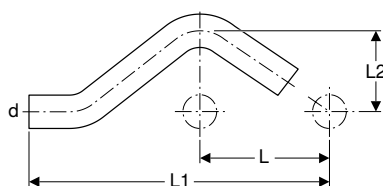

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
20801	10	12	30	6	16.4	3.2	25	5	4.04
20802	12	15	30	6	16.5	3.2	100	10	4.48
20803	15	18	30	6	16.6	3.3	50	10	4.87
20804	20	22	30	6	16.8	3.5	50	10	5.62
20805	25	28	30	6	17.9	3.8	50	10	6.94

T-pieces

Geberit Mapress Carbon Steel T-piece, equal



click & scan

Application purposes


- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21001	10	12	90	5.6	3.5	2.8	1.1	1.8		50	10		6.98
21002	12	15	90	6.4	3.9	3.2	1.2	1.9		200	20		7.63
21003	15	18	90	6.8	4.1	3.4	1.4	2.1		100	20		8.21
21004	20	22	90	7.4	4.4	3.7	1.6	2.3		100	20		8.79
21005	25	28	90	8.4	5	4.2	1.9	2.7		50	10		11.79
21006	32	35	90	10	5.7	5	2.4	3.1		50	5		18.41
21007	40	42	90	11.4	6.5	5.7	2.7	3.5		48	4		27.15
21008	50	54	90	13.8	7.7	6.9	3.4	4.2	320	20	2		32.57
21012	65	66.7	90	22	10.5	11	6	5.5		5		1	131.70
21009	65	76.1	90	23	11	11.5	6.2	5.7	160	10		1	187.36
21010	80	88.9	90	26	12.7	13	7	6.7	80	5		1	216.52
21011	100	108	90	31	15.3	15.5	8	7.8	60	5		1	263.52

Geberit Mapress T-piece, reduced



click & scan

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Therm

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61191	12 / 10 / 10	15	12	12	90	6.4	3.3	3.2	3.2	1.2	1.6	1.5			1	9.31
61192	15 / 12 / 12	18	15	15	90	7.4	3.5	3.4	4	1.4	1.5	2	25	5		10.28
61193	15 / 15 / 12	18	18	15	90	7.4	3.4	3.4	4	1.4	1.4	2		5	1	10.28
61194	20 / 12 / 12	22	15	15	90	7.7	3.8	3.4	4.3	1.3	1.8	2.3	25	5		12.71
61195	20 / 15 / 15	22	18	18	90	7.4	4	3.7	3.7	1.6	2	1.7		5	1	12.71
61196	20 / 20 / 12	22	22	15	90	8.3	3.7	3.7	4.6	1.6	1.6	2.6	25	5		12.71
61197	25 / 20 / 20	28	22	22	90	8	4.1	4.2	3.8	1.9	2	1.7	25	5		14.75

Geberit Mapress Carbon Steel T-piece, reduced



click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21101	10 / 12 / 10	12	15	12	90	5.6	3.5	2.8	2.8	1.1	1.5	1.1			5	1	7.56
21201	12 / 10 / 10	15	12	12	90	7.2	3.6	3.2	4	1.2	1.9	2.3			5		7.56
21202	12 / 10 / 12	15	12	15	90	6.4	3.6	3.2	3.2	1.2	1.9	1.2		50	10		7.56
21103	12 / 15 / 12	15	18	15	90	6.4	3.6	3.2	3.2	1.2	1.6	1.2		50	10		8.01
21104	12 / 20 / 12	15	22	15	90	6.4	4.2	3.2	3.2	1.2	2.1	1.2		50	10		8.01
21203	15 / 10 / 15	18	12	18	90	6.8	3.8	3.4	3.4	1.4	2.1	1.4		50	10		8.01
21204	15 / 12 / 15	18	15	18	90	6.8	4.2	3.4	3.4	1.4	2.2	1.4		100	20		8.01
21105	15 / 20 / 15	18	22	18	90	6.8	4.1	3.4	3.4	1.4	2	1.4		25	5		8.38
21205	20 / 10 / 20	22	12	22	90	7.4	4	3.7	3.7	1.6	2.3	1.6		50	10		8.38
21206	20 / 12 / 20	22	15	22	90	7.4	4.4	3.7	3.7	1.6	2.4	1.6		100	20		8.38
21207	20 / 15 / 20	22	18	22	90	7.4	4.4	3.7	3.7	1.6	2.4	1.6		100	20		8.38
21107	20 / 25 / 20	22	28	22	90	7.4	4.5	3.7	3.7	1.6	2.2	1.6		25	5		11.85
21209	25 / 12 / 25	28	15	28	90	8.4	4.7	4.2	4.2	1.9	2.7	1.9		100	10		11.85
21210	25 / 15 / 25	28	18	28	90	8.4	4.7	4.2	4.2	1.9	2.7	1.9		100	10		11.85
21211	25 / 20 / 25	28	22	28	90	8.4	4.8	4.2	4.2	1.9	2.7	1.9		100	10		11.85
21212	32 / 12 / 32	35	15	35	90	10	5.1	5	5	2.4	3.1	2.4		50	5		17.83
21213	32 / 15 / 32	35	18	35	90	10	5.1	5	5	2.4	3.1	2.4		50	5		17.83
21214	32 / 20 / 32	35	22	35	90	10	5.2	5	5	2.4	3.1	2.4		50	5		17.83
21215	32 / 25 / 32	35	28	35	90	10	5.5	5	5	2.4	3.2	2.4		50	5		17.83
21216	40 / 12 / 40	42	15	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		56	4		24.88
21217	40 / 15 / 40	42	18	42	90	11.4	5.3	5.7	5.7	2.7	3.3	2.7		48	4		24.88
21218	40 / 20 / 40	42	22	42	90	11.4	5.5	5.7	5.7	2.7	3.4	2.7		48	4		24.88
21219	40 / 25 / 40	42	28	42	90	11.4	5.8	5.7	5.7	2.7	3.5	2.7		48	4		24.88
21220	40 / 32 / 40	42	35	42	90	11.4	6.1	5.7	5.7	2.7	3.5	2.7		48	4		24.88
21221	50 / 12 / 50	54	15	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4		24	4		30.41
21222	50 / 15 / 50	54	18	54	90	13.8	5.9	6.9	6.9	3.4	3.9	3.4		40	2		30.41
21223	50 / 20 / 50	54	22	54	90	13.8	6.1	6.9	6.9	3.4	4	3.4		40	2		30.41
21224	50 / 25 / 50	54	28	54	90	13.8	6.4	6.9	6.9	3.4	4.1	3.4		30	2		30.41
21225	50 / 32 / 50	54	35	54	90	13.8	6.8	6.9	6.9	3.4	4.2	3.4		24	2		30.41
21226	50 / 40 / 50	54	42	54	90	13.8	7.2	6.9	6.9	3.4	4.2	3.4		30	2		30.41
21229	65 / 50 / 65	66.7	54	66.7	90	22	8.2	11	11	6	4.7	6		5		1	131.70
21208	65 / 20 / 65	76.1	22	76.1	90	23	7.2	11.5	11.5	6.2	5.1	6.2	160	10		1	187.43
21230	65 / 25 / 65	76.1	28	76.1	90	23	7.5	11.5	11.5	6.2	5.2	6.2	160	10		1	187.43
21231	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2	200	5		1	187.43
21232	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2	200	5		1	187.43
21233	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2	160	10		1	187.43
21234	65 / 65 / 65	76.1	66.7	76.1	90	23	11	11.5	11.5	6.2	6	6.2		5		1	187.43
21236	80 / 20 / 80	88.9	22	88.9	90	26	7.8	13	13	7	5.7	7	160	5		1	210.38
21237	80 / 25 / 80	88.9	28	88.9	90	26	8.1	13	13	7	5.8	7	160	5		1	210.38
21238	80 / 32 / 80	88.9	35	88.9	90	26	8.5	13	13	7	5.9	7	160	5		1	210.38
21239	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7		5		1	210.38
21240	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7		5		1	210.38
21241	80 / 65 / 80	88.9	76.1	88.9	90	26	11.6	13	13	7	6.3	7	80	5		1	210.38
21244	100 / 20 / 100	108	22	108	90	31	8.8	15.5	15.5	8	6.7	8		5		1	248.61
21245	100 / 25 / 100	108	28	108	90	31	9.1	15.5	15.5	8	6.8	8	80	5		1	248.61
21246	100 / 32 / 100	108	35	108	90	31	9.5	15.5	15.5	8	6.9	8	80	5		1	248.61
21247	100 / 40 / 100	108	42	108	90	31	9.9	15.5	15.5	8	6.9	8	80	5		1	248.61
21248	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8	80	5		1	248.61
21249	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8	80	5		1	248.61
21250	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8				1	248.61

Geberit Mapress Carbon Steel T-piece with female thread


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21301	10	12	3/8	12	90	5.6	3.3	2.8	2.8	1.1	2.3	1.1				1	17.57
21302	10 / 15 / 10	12	1/2	12	90	5.6	3.6	2.8	2.8	1.1	2.3	1.1			5	1	17.57
21304	12 / 15 / 12	15	1/2	15	90	6.4	3.7	3.2	3.2	1.2	2.4	1.2		100	20		10.93
21305	15	18	1/2	18	90	6.8	3.9	3.4	3.4	1.4	2.6	1.4		100	20		10.93
21307	20 / 15 / 20	22	1/2	22	90	7.4	4	3.7	3.7	1.6	2.7	1.6		100	20		11.98
21308	20 / 20 / 20	22	3/4	22	90	7.4	4.4	3.7	3.7	1.6	2.8	1.6		25	5		11.98
21309	25 / 15 / 25	28	1/2	28	90	8.4	4.4	4.2	4.2	1.9	3.1	1.9		50	10		13.92
21310	25 / 20 / 25	28	3/4	28	90	8.4	4.7	4.2	4.2	1.9	3.2	1.9		50	10		13.92
21311	25	28	1	28	90	8.4	5.3	4.2	4.2	1.9	3.6	1.9			5	1	13.92
21312	32 / 15 / 32	35	1/2	35	90	10	4.8	5	5	2.4	3.5	2.4		50	5		19.21
21313	32 / 20 / 32	35	3/4	35	90	10	5.1	5	5	2.4	3.6	2.4		50	5		19.21
21314	32 / 25 / 32	35	1	35	90	10	5.6	5	5	2.4	3.9	2.4			5	1	19.21
21316	40 / 15 / 40	42	1/2	42	90	11.4	5.1	5.7	5.7	2.7	3.8	2.7	768	48	4		30.70
21317	40 / 20 / 40	42	3/4	42	90	11.4	5.4	5.7	5.7	2.7	3.9	2.7		48	4		30.70
21318	40 / 25 / 40	42	1	42	90	11.4	6	5.7	5.7	2.7	4.3	2.7			5		30.70
21320	50 / 15 / 50	54	1/2	54	90	13.8	5.7	6.9	6.9	3.4	4.4	3.4	640	20	2		32.53
21321	50 / 20 / 50	54	3/4	54	90	13.8	6	6.9	6.9	3.4	4.5	3.4		20	2		38.70
21322	50 / 25 / 50	54	1	54	90	13.8	6.6	6.9	6.9	3.4	4.9	3.4			5	1	38.70
21324	50	54	2	54	90	13.8	7.9	6.9	6.9	3.4	5.6	3.4		5		1	38.70
21325	65 / 20 / 65	66.7	3/4	66.7	90	22	6.4	11	11	6	4.9	6	200	5		1	110.60
21326	65 / 20 / 65	76.1	3/4	76.1	90	23	7.4	11.5	11.5	6.2	5.9	6.2	320	10		1	164.51
21329	65 / 50 / 65	76.1	2	76.1	90	23	9.1	11.5	11.5	6.2	6.8	6.2				1	164.51
21331	80 / 20 / 80	88.9	3/4	88.9	90	26	8	13	13	7	6.5	7		5		1	178.44
21334	80 / 50 / 80	88.9	2	88.9	90	26	9.7	13	13	7	7.4	7				1	178.44
21336	100 / 20 / 100	108	3/4	108	90	31	9	15.5	15.5	8	7.5	8	80	5		1	214.72

Geberit Mapress Carbon Steel T-piece with female thread and plain ends


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	H [cm]	H1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21341	15	18	1/2	18	90	10	3.4	5	5	2.1	25	5	1	9.07
21342	20 / 15 / 20	22	1/2	22	90	10	3.6	5	5	2.3	50	10	1	9.91
21343	25 / 15 / 25	28	1/2	28	90	10	4.3	5	5	3		10	1	11.56
21344	32 / 15 / 32	35	1/2	35	90	11.4	4.7	5.7	5.7	3.4		10	1	16.03
21345	40 / 15 / 40	42	1/2	42	90	13.4	5	6.7	6.7	3.7		10	1	24.95
21346	50 / 15 / 50	54	1/2	54	90	14.6	5.7	7.3	7.3	4.4	25	5	1	26.93

Pipe crosses

Geberit Mapress Carbon Steel pipe cross, reduced



click & scan



Application purposes


- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	arc [°]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21121	40 / 25	42	28	90	11.4	11.6	5.7	5.8	2.7	3.5	5	1	41.16
21122	50 / 25	54	28	90	13.8	12.8	6.9	6.4	3.4	4.1		1	46.14
21123	50 / 32	54	35	90	13.8	13.6	6.9	6.8	3.4	4.2		1	46.14
21127	65 / 25	76.1	28	90	23	15.8	11.5	7.9	6.2	5.6		1	283.35
21128	65 / 32	76.1	35	90	23	16.2	11.5	8.1	6.2	5.5		1	280.76
21130	80 / 25	88.9	28	90	26	17.4	13	8.7	7	6.4		1	317.22
21131	80 / 32	88.9	35	90	26	18	13	9	7	6.4		1	317.22
21133	100 / 25	108	28	90	31	20	15.5	10	8	7.7		1	392.19
21134	100 / 32	108	35	90	31	20	15.5	10	8	7.4		1	392.19

Geberit Mapress Carbon Steel pipe cross 30°, reduced



click & scan

Application purposes


- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	arc [°]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21404	15 / 12	18	15	30	6.8	4	3.4	1.4	2	1280	10	5	1	21.39
21406	20 / 12	22	15	30	7.4	4.2	3.7	1.6	2.2	640		5	1	22.11
21409	25 / 12	28	15	30	8.4	4.5	4.2	1.9	2.5	1280		10	1	25.11

Geberit Mapress Carbon Steel pipe cross, reduced, offset

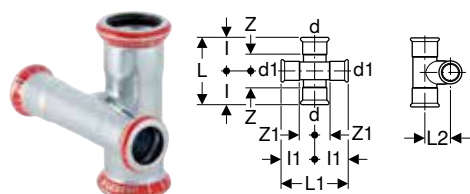
[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21504	12	15	15	90	6.4	6.4	2	3.2	3.2	1.2	1.2	25	5		23.63
21505	15 / 12	18	15	90	6.8	8.4	2.3	3.4	4.2	1.4	2.2	25	5		26.21
21506	20 / 12	22	15	90	7.4	8.4	2.5	3.7	4.2	1.6	2.2	25	5		27.63
21509	20 / 15	22	18	90	7.4	8.4	2.6	3.7	4.2	1.6	2.2		5	1	27.97
21507	25 / 12	28	15	90	8.4	8.4	2.9	4.2	4.2	1.9	2.2		5	1	29.27
21510	25 / 15	28	18	90	8.4	8.4	3.2	4.2	4.2	1.9	2.2		5	1	29.68
21512	25 / 20	28	22	90	8.4	8.4	3.3	4.2	4.2	1.9	2.1			1	31.48

Adaptors, permanent

Geberit FlowFit adaptor to Geberit Mapress, with plain end

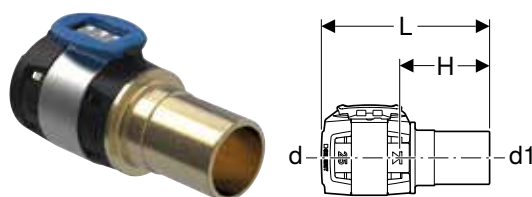
[click & scan](#)

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01
620.232.00.1	20	25	22	7	3.7	25	5		13.91
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93
620.234.00.1	32	40	35	8	4.4	25	5		22.24
620.235.00.1	40	50	42	12.8	6.9	10		1	50.07
620.236.00.1	50	63	54	13.8	7.5	5		1	77.86

Geberit Mapress Carbon Steel adaptor with weld-on and plain end



click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Not zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s1 [mm]	s [mm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
12412	12	15	17.2	2.3	1.2	12	3	25	5		7.05
12413	15	18	21.3	2.9	1.2	12	3	25	5		7.26
12414	20	22	26.9	4	1.5	12	3.4	25	5		7.88
12415	25	28	33.7	4.4	1.5	12	3.4	25	5		10.17
12416	32	35	42.4	5.2	1.5	12	4	25	5		11.19
12417	40	42	48.3	4.7	1.5	12	4.5	24	4		14.31
12418	50	54	60.3	4.7	1.5	12	5	24	4		17.63
12419	65	76.1	76.1	3.7	2	12	7	15	5	1	21.55
12420	80	88.9	88.9	4.1	2	12	7.5	5		1	26.97
12421	100	108	114.3	5.2	2	12	9	5		1	32.78

Geberit Mapress Carbon Steel adaptor with male thread



click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21701	10	12	3/8	3.3	1.6		100	10		7.85
21700	10 / 15	12	1/2	3.6	2.2		25	5		7.85
21702	12 / 10	15	3/8	3.8	1.8		100	20		7.85
21703	12 / 15	15	1/2	4.1	2.1		200	20		7.85
21714	12 / 20	15	3/4	4.3	2.6		50	10		7.85
21704	15	18	1/2	4.2	2.2		200	20		8.87
21705	15 / 20	18	3/4	4.4	2.4		100	20		8.87
21715	20 / 15	22	1/2	4	2.2		100	20		9.22
21707	20	22	3/4	4.4	2.3		100	20		9.22
21716	20 / 25	22	1	4.6	2.6		100	20		9.22
21717	25 / 20	28	3/4	4.6	2.6		100	20		11.96
21708	25	28	1	4.8	2.5	4000	100	20		13.00
21727	25 / 32	28	1 1/4	4.8	2.8		50	10		13.00
21719	32 / 25	35	1	5.1	2.5		50	5		16.73
21709	32	35	1 1/4	5.3	2.7	2000	50	5		16.73
21720	32 / 40	35	1 1/2	5.3	3		50	5		16.73
21721	40 / 32	42	1 1/4	5.7	2.7		48	4		24.50
21710	40	42	1 1/2	5.7	2.7	1920	48	4		24.50
21722	50 / 40	54	1 1/2	7.1	3.6		24	4		28.89
21711	50	54	2	7.1	3.6	960	24	4		28.89
21712	65	66.7	2 1/2	11.8	4	480	5		1	42.23
21713	65	76.1	2 1/2	11.9	4.3		15		1	47.31
21724	80	88.9	3	13.7	5		5		1	53.08
21725	100	108	4	16	6.1		5		1	69.67

Geberit Mapress Carbon Steel adaptor with male thread and plain end


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21930	10	12	3/8	4.8				1	7.85
21931	10 / 15	12	1/2	5.5				1	7.85
21932	12 / 15	15	1/2	5.7		50	10		7.85
21933	15	18	1/2	5.7		50	5		8.87
21934	15 / 20	18	3/4	5.9			5	1	8.87
21935	20 / 15	22	1/2	5.7		50	5		9.22
21936	20	22	3/4	5.9		50	10		9.22
21937	25	28	1	6.6		50	10		12.38
21938	32	35	1 1/4	8	400		5	1	15.92
21939	40	42	1 1/2	9.1				1	18.23
21940	50	54	2	10.2			5	1	27.54

Geberit Mapress Carbon Steel adaptor with female thread


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21800	10	12	3/8	3.1	0.3			5	1	7.85
21801	10 / 15	12	1/2	3.4	0.4		25	5		7.85
21827	12 / 10	15	3/8	3.3	0.3		50	10		7.85
21802	12 / 15	15	1/2	3.7	0.4		200	20		7.85
21823	12 / 20	15	3/4	3.8	0.7		25	5		7.85
21803	15	18	1/2	3.7	0.4		200	20		8.87
21804	15 / 20	18	3/4	3.8	0.3		50	10		8.87
21805	20 / 15	22	1/2	3.8	0.3		100	20		9.22
21806	20	22	3/4	3.9	0.3		100	20		9.22
21824	20 / 25	22	1	4.2	0.4		50	10		9.22
21807	25 / 15	28	1/2	3.8	0.2	4000	50	10		13.00
21808	25 / 20	28	3/4	3.8	0.1		50	10		13.00
21809	25	28	1	4.4	0.4	4000	50	10		13.00
21810	32 / 20	35	3/4	4.2	0.1		25	5		16.73
21820	32 / 25	35	1	4.5	0.2		50	5		16.73
21811	32	35	1 1/4	4.9	0.4		50	5		16.73
21814	40	42	1 1/2	5.3	0.4		48	4		19.20
21818	50	54	2	6.2	0.5		24	4		28.89

Geberit Mapress Carbon Steel adaptor with female thread and plain end


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21907	10	12	3/8	5.4	4.4			1	7.85
21901	10 / 15	12	1/2	5.8	4.5		5	1	7.85
21908	12 / 10	15	3/8	7.4	6		5	1	7.47
21902	12 / 15	15	1/2	6.1	4.8	50	10		7.85
21903	15	18	1/2	6.1	4.8	50	10		8.59
21904	15 / 20	18	3/4	6.4	4.9		5	1	8.59
21905	20 / 15	22	1/2	6.2	4.9	100	20		9.15
21906	20	22	3/4	6.5	5	25	5		9.15
21910	25 / 15	28	1/2	7.1	5.6		5	1	10.95
21912	32 / 15	35	1/2	7.7	5.2		5	1	15.92
21914	40 / 15	42	1/2	8.1	5.7		5	1	18.59
21916	50 / 15	54	1/2	8.6	6.2		5	1	23.91
21918	65 / 15	76.1	1/2	10.5	8.7			1	61.72
21920	80 / 15	88.9	1/2	11.5	10.2			1	82.31
21922	100 / 15	108	1/2	12.7	11.4			1	120.78

Geberit Mapress Carbon Steel elbow adaptor 90° with male thread


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21611	10	12	3/8	90	3.2	2.5	1.5	2400	60	5	1	7.85
21612	12 / 10	15	3/8	90	3.6	2.6	1.6	2400	60	5	1	8.68
21613	12 / 15	15	1/2	90	3.5	3.1	1.5	9600	100	20		8.68
21615	15	18	1/2	90	3.7	3.1	1.7	4000	50	10		9.15
21618	20	22	3/4	90	4.1	3.5	2	2400	25	5		12.38
21609	25 / 20	28	3/4	90	5.8	5	3.5	1920	40	5	1	21.16
21610	25	28	1	90	5.8	5.4	3.5	1920		5	1	21.16

Geberit Mapress Carbon Steel elbow adaptor 90° with female thread

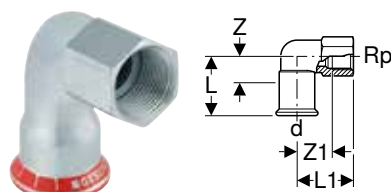
[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21659	20 / 15	22	1/2	90	4.2	4	2.1	2.7	2560	20	5	1	13.93
21660	25 / 15	28	1/2	90	4.7	4.4	2.4	3.1	4000	50	5		17.76
21661	25 / 20	28	3/4	90	5.8	5	3.5	3.5	1280	10	5	1	20.16
21662	25	28	1	90	5.8	5.4	3.5	3.6	1920	40	5	1	20.16

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Geberit Mapress Carbon Steel bend adaptor 90° with male thread

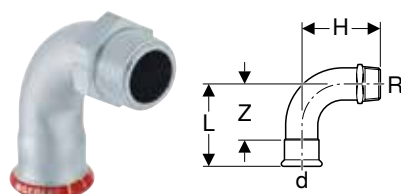
[click & scan](#)

Application purposes


- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20501	10	12	3/8	90	4.2	3.4	2.5	100	5		9.34
20502	12 / 10	15	3/8	90	4.9	3.7	2.9	50	10		10.04
20503	12 / 15	15	1/2	90	4.9	4	2.9	100	20		10.43
20505	15	18	1/2	90	5.3	4.7	3.3	50	10		11.31
20507	20	22	3/4	90	6.1	5.4	4	50	10		13.99
20508	25	28	1	90	7.2	6.6	4.9	50	10		17.76
23509	32	35	1 1/4	90	6.8	9.8	4.2	20	5		26.41
23510	40	42	1 1/2	90	8	11.3	5		5	1	46.47
23511	50	54	2	90	10	13.8	6.5		5	1	63.51

Geberit Mapress Carbon Steel bend adaptor 90° with female thread

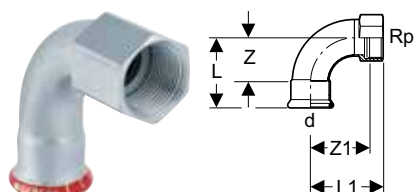

click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20551	10	12	3/8	90	4.2	4.1	2.5	3			1	9.34
20552	12 / 10	15	3/8	90	4.9	4.5	2.9	3.4		5	1	10.04
20553	12 / 15	15	1/2	90	4.9	4.8	2.9	3.3	50	5		10.43
20555	15	18	1/2	90	5.3	5.2	3.3	3.7	50	5		11.31
20557	20	22	3/4	90	6.1	6	4	4.4	25	5		13.99
20558	25 / 15	28	1/2	90	7.2	6.5	4.9	5		5	1	17.76
20559	25	28	1	90	7.2	6.6	4.9	4.7	25	5		20.16
20560	32	35	1 1/4	90	6.8	7.5	4.2	5.4		5	1	27.25
20561	40	42	1 1/2	90	8	8.4	5	6.3			1	47.95
20562	50	54	2	90	10	10.4	6.5	7.8			1	61.13

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress Carbon Steel union



click & scan

Application purposes


- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25319	10	12	1/2	5.8	2.1		1	21.33
25320	12	15	3/4	6.6	2.6	5	1	21.71
25321	15	18	3/4	6.9	2.9	5	1	24.72
25322	20	22	1	7.2	3	5	1	30.61
25323	25	28	1 1/4	7.7	3.1	5	1	50.89
25324	32	35	1 1/2	8.2	3	5	1	70.02
25325	40	42	1 3/4	9.5	3.5	5	1	100.80
25326	50	54	2 3/8	11.3	4.3	5	1	167.29

Geberit Mapress Carbon Steel adaptor union with male thread


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, Ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25330	12 / 15	15	1/2	3/4	6.1	4.1	50	10		10.93
25332	15	18	1/2	3/4	6.1	4.1	50	10		12.36
25335	20	22	3/4	1	6.8	4.7	50	2		15.45
25329	20 / 25	22	1	1	6.9	4.8	25	5		15.61
25337	25	28	1	1 1/4	7.5	5.2	40	2		25.49
25338	32	35	1 1/4	1 1/2	8	5.4	20	2		34.74
25339	40	42	1 1/2	1 3/4	8.5	5.5	20	2		52.74
25340	50	54	2	2 3/8	9.7	6.2	15		1	120.42

Geberit Mapress Carbon Steel adaptor union with female thread


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, Ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25300	12 / 15	15	1/2	3/4	5.8	2.3	25	5		11.68
25302	15	18	1/2	3/4	5.8	2.3	50	5		12.71
25304	20	22	3/4	1	6.3	2.3	50	5		17.40
25305	20 / 25	22	1	1	6.6	3		5	1	17.40
25306	25	28	1	1 1/4	7.1	3.3	50	5		25.73
25307	32	35	1 1/4	1 1/2	7.7	3.5	25		1	36.95
25308	40	42	1 1/2	1 3/4	8.2	3.1		5	1	53.78
25309	50	54	2	2 3/8	9.5	3.4		5	1	120.08

Geberit Mapress Carbon Steel connector with union nut


[click & scan](#)

Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass, nickel-plated
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	G ["]	d _i , ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25042	12	15	1/2	10	5.1	2.5	25	5	6.32
25048	15	18	1/2	10	5.3	2.6	25	5	6.43
25049	20	22	3/4	13	5.4	2.7	50	10	9.09

Geberit Mapress Carbon Steel adaptor with union nut


[click & scan](#)

Application purposes

- For compressed air (oil purity class 3)
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	G ["]	d _i , ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25032	12	15	3/4	13	3.7	1.1	50	10		6.32
25033	15	18	3/4	13	3.7	1.1	50	10		6.43
25040	15	18	1	20	3.9	1.1		5	1	6.43
25034	20	22	1	20	4	1.1	50	10		9.09
25044	20	22	1 1/4	26	4.3	1.3		5	1	9.09
25035	25	28	1 1/4	26	4.4	1.3	50	10		12.70
25050	25	28	1 1/2	32	4.6	1.3	50	10		12.70
25036	32	35	1 1/2	32	4.8	1.3	50	5		20.21
25051	32	35	2	42	4.8	1.2	25	5		20.21
25037	40	42	1 3/4	39	5.2	1.3	24	4		27.34
25052	40	42	2	42	5.4	1.4	24	4		27.34
25053	40	42	2 1/4	42	5.6	1.4			1	27.34
25038	50	54	2 3/8	51	5.8	1.5			1	36.84
25054	50	54	2 1/2	54	6.3	1.4		5	1	36.84
25055	50	54	2 3/4	57	6.3	1.4			1	36.84
25045	65	76.1	3	73	9.9	3.3			1	107.81
25046	80	88.9	3 1/2	84	11.1	3.7			1	186.64

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



click & scan

Application purposes

- Suitable exclusively for liquid media

Characteristics

- Not admissible for drinking water installations

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	20.11
22431	12	20	15	6.7	5.2	10	2	23.45
22422	15	16	18	6.4	4.9	10	2	21.81
22432	15	20	18	6.7	5.2	10	2	25.15
22423	20	16	22	6.8	5.9	10	2	23.45
22433	20	20	22	6.8	5.9	10	2	26.80
22444	25	25	28	6.8	5.9	10	2	36.85



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Carbon Steel flange PN 6, with pressing socket

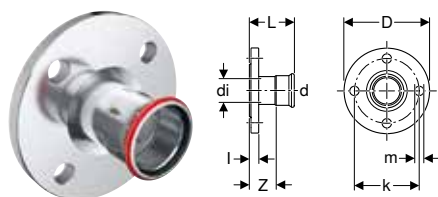

click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23744	20	22	19	9	65	11	6.1	1.4	4	4	6		1	58.09
23745	25	28	25	10	75	11	6.5	1.4	4.2	4	6		1	72.57
23746	32	35	32	12	90	14	6.8	1.4	4.2	4	6		1	93.31
23747	40	42	39	13	100	14	7.5	1.4	4.5	4	6		1	116.13
23748	50	54	51	14	110	14	8.3	1.4	4.8	4	6		1	145.12
23749	65	76.1	72	16	130	14	11.4	1.4	6.1	4	6	75	1	186.64
23750	80	88.9	84.8	19	150	18	12.1	1.6	6.1	4	6	75	1	228.09
23751	100	108	103.9	21	170	18	12.6	1.6	5.1	4	6	75	1	269.54

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161
- Geberit flange gasket, fibre composite material PN 6 → p. 104

Geberit Mapress Carbon Steel flange PN 10/16, with pressing socket

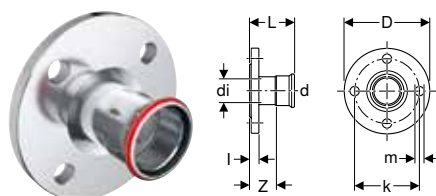

click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23754	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	48.56
23755	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	58.44
23756	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	86.91
23757	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	99.93
23758	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	127.74
23762	65	66.7	63.1	18.5	145	18	11.8	1.8	6.8	4	10 / 16	75	1	140.76
23759	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	188.75
23760	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	224.30
23761	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	266.27

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress Carbon Steel flange PN 6, with plain end

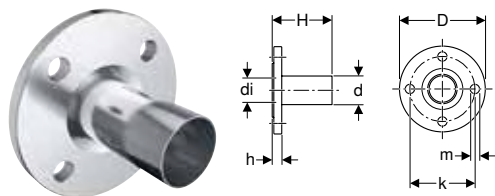

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23764	20	22	19	9	65	11	7.5	1.4	4	6		1	55.31
23765	25	28	25	10	75	11	7.7	1.4	4	6		1	69.09
23766	32	35	32	12	90	14	8.6	1.4	4	6		1	93.31
23767	40	42	39	13	100	14	10.4	1.4	4	6		1	110.60
23768	50	54	51	14	110	14	10.9	1.4	4	6		1	145.12
23769	65	76.1	72	16	130	14	13.2	1.4	4	6	75	1	186.64
23770	80	88.9	84.8	19	150	18	14.8	1.6	4	6	75	1	228.09
23771	100	108	103.9	21	170	18	16.1	1.6	4	6	75	1	269.54

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161
- Geberit flange gasket, fibre composite material PN 6 → p. 104

Geberit Mapress Carbon Steel flange PN 10/16, with plain end

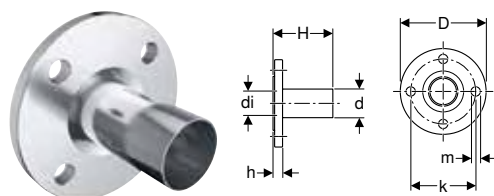
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--


Art. no.	DN	d, Ø [mm]	di, Ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23784	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	54.14
23785	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	67.82
23786	32	35	32	14	100	18	9	1.8	4	10 / 16		1	91.58
23787	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	108.52
23788	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16		1	142.35
23789	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	183.25
23790	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	223.77
23791	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	264.58

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Compensators

Geberit Mapress Carbon Steel axial expansion fitting with pressing sockets


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Suitable exclusively for liquid media

Technical data

Operating pressure	≤ 16 bar
Operating temperature	-30 – +120 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- White exterior
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, Ø [mm]	D [cm]	La [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
23932	12	15	2.6	7	15.1		1	136.96
23933	15	18	2.6	7	14.7	5	1	138.89
23934	20	22	3.1	11	10.6	5	1	150.39
23935	25	28	3.9	13	12		1	161.66
23936	32	35	4.6	13	13.9		1	173.30
23937	40	42	5.9	13	14.9		1	378.28
23938	50	54	7	18	17.6		1	408.99
23939	65	76.1	8.8	22	26.2		1	499.04
23940	80	88.9	11.7	23	28.6		1	519.14
23941	100	108	14.4	23	54.2		1	1225.68

Sealings

Geberit Mapress Carbon Steel cap



click & scan

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20211	10	12	2	0.3	25	5		5.23
20212	12	15	2.3	0.3	200	20		5.23
20213	15	18	2.3	0.3	100	10		6.27
20214	20	22	2.4	0.3	100	10		6.77
20215	25	28	2.6	0.3	50	10		7.85
20216	32	35	2.9	0.3	50	5		11.11
20217	40	42	3.3	0.3	48	4		23.47
20218	50	54	3.8	0.3	48	4		26.42
20222	65	66.7	5.5	0.5			1	36.85
20219	65	76.1	6	0.7	5		1	39.42
20220	80	88.9	6.7	0.7			1	54.57
20221	100	108	8.2	0.7			1	70.48

T-pieces for heating

Geberit Mapress T-piece crossing with insulation box

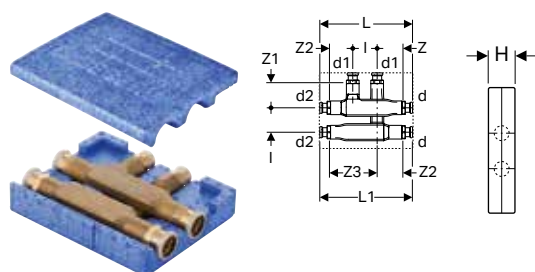

click & scan

Application purposes

- For connecting to two parallel pipes without intersecting
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	DR brass CC752S
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	L [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63113	12 / 12 / 12	15	15	15	90	19	19	5	5	4.8	5.2	5.3	9.8	5	1	35.33
63115	15 / 12 / 15	18	15	18	90	19	19	5	5	4.8	5.2	5.3	9.8	5	1	102.72
63117	20 / 12 / 20	22	15	22	90	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	107.58
63118	20 / 15 / 20	22	18	22	90	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	107.58

Connections for heating

Geberit Mapress metal pipe connector bend 90° with insulation box and union connector for Euro cone

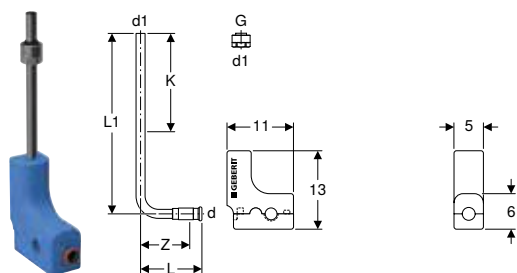

click & scan

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connector bend 90°, made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63126	12 / 20	15	3/4	15	90	10.2	30	8.2	17	20	2	15.55



- Tighten the union as far as it will go

Geberit Mapress metal pipe connector T-piece with insulation box and union connector for Euro cone

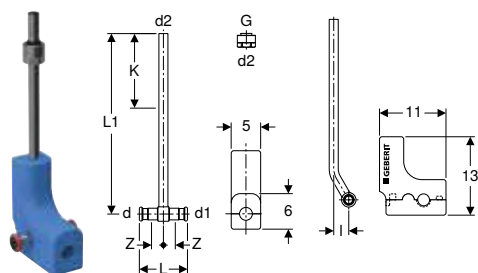

click & scan

Application purposes

- For connecting radiator valves
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connection T-piece made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63127	12 / 20 / 12	15	3/4	15	15	90	8	30	2.5	2	17	20	2	55.58
63128	15 / 20 / 15	18	3/4	18	15	90	9.4	30	2.5	2.7	17	20	2	58.52



- Tighten the union as far as it will go

Geberit Mapress type C connection box

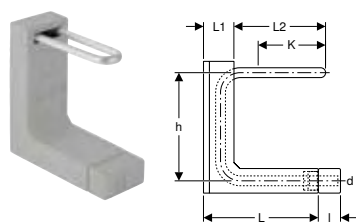
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Characteristics


- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63108	12	15	5	22.3	6.3	17.6	4.5	10.5	27	5	22	13.6	80	10	1	37.30

Geberit Mapress type L connection box

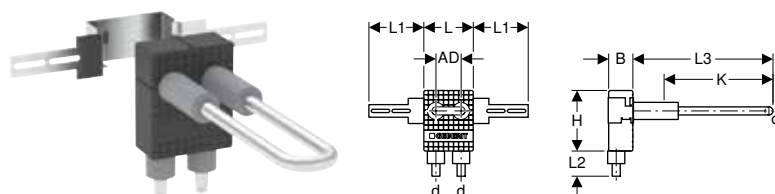
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Scope of delivery


- Installation sheet

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	B [cm]	H [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63109	12	15	5	10	11	5	25	5	12	21	160	10	1	48.64

Geberit Mapress Carbon Steel connector T-piece set for return flow

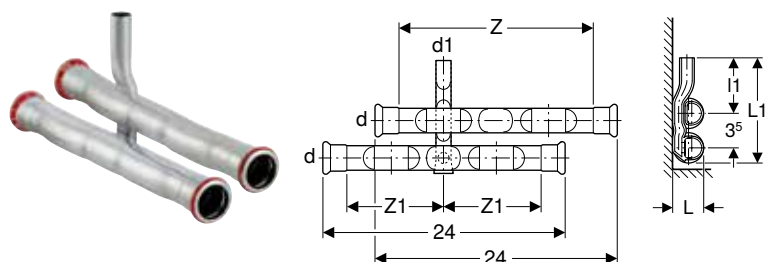

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with long connection
- Socket, offset, long

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
23602	12	15	15	90	2.7	10.8	6.5	10	20		1	33.09
23603	15 / 12	18	15	90	2.9	11	6.5	10	20	5	1	34.21
23604	20 / 12	22	15	90	3.3	11.2	6.5	9.9	19.8		1	35.39

Geberit Mapress Carbon Steel set of connector T-pieces for inlet and return flow

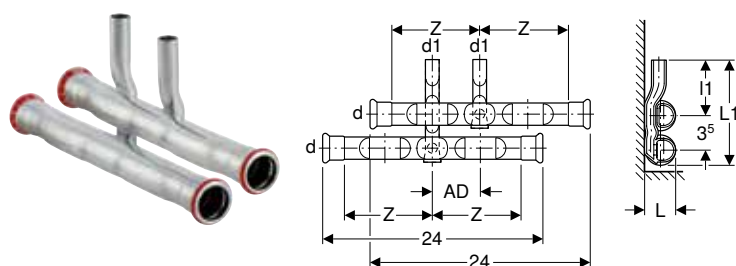

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	AD [cm]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
24002	12	15	15	90	4–6	2.7	10.8	6.5	10	25		1	54.51
24003	15 / 12	18	15	90	4–6	2.9	11	6.5	10	25		1	56.42
24004	20 / 12	22	15	90	4–6	3.3	11.2	6.5	10		5	1	59.27

Geberit Mapress Carbon Steel set of connector T-pieces for inlet and return flow, with union connector for Euro cone

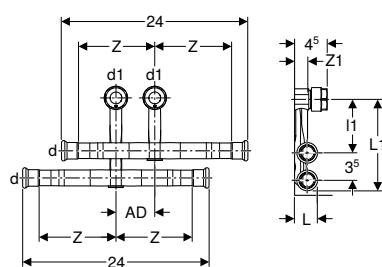

click & scan

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Characteristics



- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Union connector for Geberit Mapress Stainless Steel 1.4401 system pipes
- Union connector for Geberit Mapress Carbon Steel system pipes
- Union connector for copper pipes, rough, nickel-plated and chrome-plated
- Installation completely in front of the wall

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	AD [cm]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
24045	12	15	15	90	5	2.7	12.6	6.8	10	1.7	5	1	94.94
24046	15 / 12	18	15	90	5	2.9	12.7	6.8	10	1.7	5	1	97.74
24047	20 / 12	22	15	90	5	3.3	13	6.8	10	1.7	5	1	102.03



- Tighten the union as far as it will go

Geberit Mapress Carbon Steel connector with union nut



click & scan

Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of ≤ di, see table
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass, nickel-plated
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25042	12	15	1/2	10	5.1	2.5	25	5	6.32
25048	15	18	1/2	10	5.3	2.6	25	5	6.43
25049	20	22	3/4	13	5.4	2.7	50	10	9.09

Geberit Mapress Carbon Steel suction nozzle for single-pipe heating

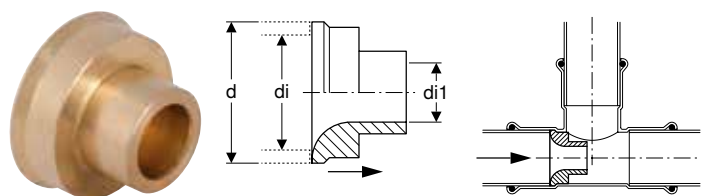

click & scan

Application purposes

- For heating
- For inserting in Geberit Mapress T-pieces
- Application overview – Geberit Mapress Carbon Steel → p. 111


Technical data

Product material	Brass CW614N
------------------	--------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	di1, ø [mm]	SU1 [pc.]	GBP/pc.
90253	15	18	15.6	7	1	1.46
90254	20	22	19	9	1	1.68
90255	25	28	25	12	1	1.86

Geberit Mapress Carbon Steel, FKM, blue System pipes 1.0034

Geberit Mapress Carbon Steel system pipe, outside zinc-plated

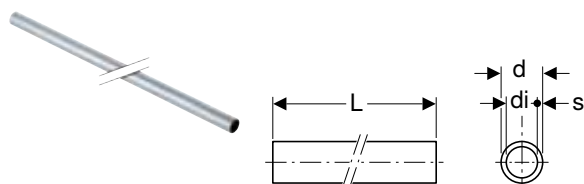

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 6 m								
29101	10	12	9.6	1.2	420	60		4.20
29102	12	15	12.6	1.2	840	120		4.28
29103	15	18	15.6	1.2	840	120		5.15
29104	20	22	19	1.5	840	60		6.84
29105	25	28	25	1.5	420	60		9.35
29106	32	35	32	1.5	420	30		12.41
29107	40	42	39	1.5	420	30		17.01
29108	50	54	51	1.5	420	30		22.08
29159	65	76.1	72.1	2	144		6	48.66
29160	80	88.9	84.9	2	96		6	55.00
29161	100	108	104	2	78		6	64.24

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

System pipes 1.0215

Geberit Mapress Carbon Steel system pipe, inside and outside zinc-plated

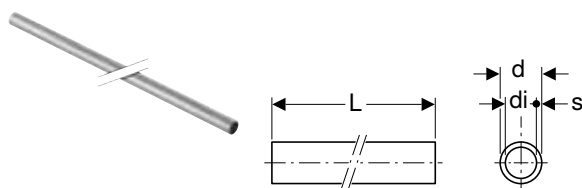

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Sendzimir galvanized

Technical data

Product material	Non-alloy steel 1.0215 E220 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
19402	12	15	12	1.5	6	840	120		3.49
19404	20	22	19	1.5	6	840	60		6.64
19405	25	28	25	1.5	6	420	60		9.36
19406	32	35	32	1.5	6	420	30		11.54
19407	40	42	39	1.5	6	420	30		13.68
19408	50	54	51	1.5	6	420	30		17.56
19409	65	76.1	72.1	2	6	144		6	32.92
19410	80	88.9	84.9	2	6	96		6	40.64
19411	100	108	104	2	6	78		6	52.72

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

Pipe nipples

Geberit Mapress Carbon Steel pipe nipple, outside zinc-plated



click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22050	12	15	12.6	1.2	5		5	1	1.60
22051	15	18	15.6	1.2	5	25	5		1.77
22052	20	22	19	1.5	5.2		5	1	1.87
22053	25	28	25	1.5	5.6	25	5		2.55
22054	32	35	32	1.5	6.2		5	1	4.48
22055	40	42	39	1.5	8		5	1	6.36
22056	50	54	51	1.5	9		5	1	8.21
22057	65	76.1	72.1	2	13.6			1	38.15
22058	80	88.9	84.9	2	15			1	44.67
22059	100	108	104	2	18			1	63.30

Couplings

Geberit Mapress Carbon Steel coupling (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51062	12	15	4.8	0.8	5		5.43
51063	15	18	4.8	0.8	5		6.23
51064	20	22	5	0.8	5		7.76
51065	25	28	5.4	0.8	5		9.22
51066	32	35	6.2	1	5		13.60
51067	40	42	7.1	1.1	5		19.03
51068	50	54	8.3	1.3	5		26.73
51071	65	76.1	12.7	2.1		1	105.20
51072	80	88.9	14.5	2.5		1	123.20
51073	100	108	17.6	2.6		1	188.33

Geberit Mapress Carbon Steel slip coupling (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51082	12	15	2.5	8	3	5		6.20
51083	15	18	2.5	8	3	5		7.05
51084	20	22	2.5	8.4	3.4	5		8.30
51085	25	28	3	9.1	3.1	5		10.41
51086	32	35	3	10.2	4.2	5		17.75
51087	40	42	4	12	4	5		21.54
51088	50	54	4	14	6	5		30.89
51091	65	76.1	6	23	11		1	150.56
51092	80	88.9	7	26	12		1	171.79
51093	PO	100	8	31	15		1	241.69

PO: Phase out as of March 2025

Reducers

Geberit Mapress Carbon Steel reducer with plain end (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Concentric
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51133	15 / 12	18	15	5.5	3.5	5		3.83
51134	20 / 12	22	15	5.9	3.9	5		3.63
51135	20 / 15	22	18	5.7	3.7	5		3.63
51136	25 / 12	28	15	6.6	4.6	5		4.97
51137	25 / 15	28	18	6.4	4.4	5		4.97
51138	25 / 20	28	22	6	3.9	5		4.97
51141	32 / 20	35	22	7.1	5	5		5.24
51142	32 / 25	35	28	6.8	4.5	5		5.24
51145	40 / 20	42	22	8.2	6.1		1	12.68
51146	40 / 25	42	28	8.3	6		1	12.68
51147	40 / 32	42	35	7.7	5.1	5		12.68
51150	50 / 20	54	22	9.5	7.4		1	24.94
51151	50 / 25	54	28	11	8.7		1	24.94
51152	50 / 32	54	35	10.6	8		1	24.94
51153	50 / 40	54	42	9.2	6.2	5		24.94
51164	65 / 50	76.1	54	14.6	11.1		1	68.16
51167	80 / 50	88.9	54	16.2	12.8		1	92.49
51168	80 / 65	88.9	76.1	16.1	10.8		1	92.49
51169	100 / 50	108	54	17.2	13.7		1	101.59
51171	100 / 65	108	76.1	18.4	13.1		1	101.59
51172	100 / 80	108	88.9	20.3	14.3		1	101.59

Bends

Geberit Mapress Carbon Steel bend (FKM, blue)

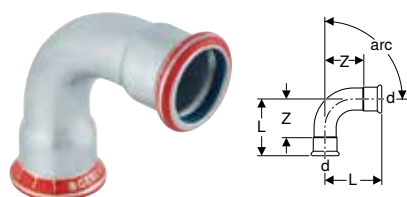

click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
51222	12	15	3.6	1.6	5		6.22
51223	15	18	3.7	1.7	5		7.01
51224	20	22	4.2	2.1	5		9.82
51225	25	28	4.8	2.5	5		12.64
51226	32	35	4.3	1.7	5		20.56
51227	40	42	5.1	2.1	5		31.80
51228	50	54	6.2	2.7	5		42.72
51231	65	76.1	10.3	5		1	139.63
51232	80	88.9	11.7	5.7		1	166.82
51233	100	108	14.3	6.8		1	285.61
arc / angle: 90°							
51282	12	15	4.9	2.9	5		5.87
51283	15	18	5.3	3.3	5		7.27
51284	20	22	6.1	4	5		9.79
51285	25	28	7.2	4.9	5		12.63
51286	32	35	6.8	4.2	5		26.46
51287	40	42	8	5	5		39.30
51288	50	54	10	6.5	5		50.01
51291	65	76.1	15.9	10.6		1	148.46
51292	80	88.9	18.5	12.5		1	186.90
51293	100	108	23	15.5		1	285.61

Geberit Mapress Carbon Steel bend with plain end (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
51242	12	15	3.6	4.5	1.6	5		6.22
51243	15	18	3.7	4.2	1.7	5		7.01
51244	20	22	4.2	5.2	2.1	5		9.82
51245	25	28	4.8	5.6	2.5	5		12.64
51246	32	35	4.3	5.3	1.7	5		17.33
51247	40	42	5.1	6.1	2.1	5		26.42

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51248	50	54	6.2	7.3	2.7	5		37.60
51251	65	76.1	10.3	11.1	5		1	139.63
51252	80	88.9	11.7	12.8	5.7		1	166.82
51253	100	108	14.3	15.8	6.8		1	285.61
arc / angle: 90°								
51312	12	15	4.9	5.9	2.9	5		5.84
51313	15	18	5.3	6.1	3.3	5		7.27
51314	20	22	6.1	7	4	5		9.79
51315	25	28	7.2	7.9	4.9	5		12.63
51316	32	35	6.8	7.4	4.2	5		26.46
51317	40	42	8	8.8	5	5		39.30
51318	50	54	10	10.8	6.5	5		50.01
51321	65	76.1	15.9	16.7	10.6		1	158.21
51322	80	88.9	18.5	19.5	12.5		1	191.52
51323	100	108	23	24.1	15.5		1	291.96

Geberit Mapress Carbon Steel bend with plain ends 90°

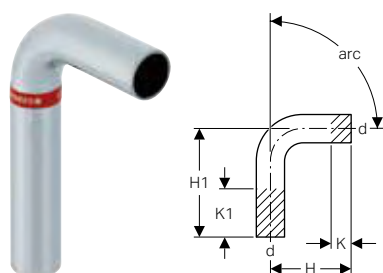

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	arc [°]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20401	10	12	90	4.8	11.9	0	7.1		25	5		3.00
20402	12	15	90	5.9	12.9	0	7		100	20		3.68
20403	15	18	90	6.1	13.3	0	7.2		50	10		3.98
20404	20	22	90	7	14.2	0	7.2	3200	50	10		3.98
20405	25	28	90	7.9	15.5	0	7.6		50	10		4.70
20406	32	35	90	7.7	15.4	0	7.7		25	5		10.91
20407	40	42	90	9	18	0	9			5	1	17.71
20408	50	54	90	11.1	20.5	0	9.4				1	22.40

Geberit Mapress Carbon Steel pipe bridge

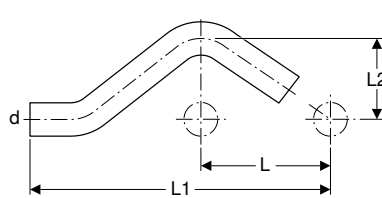

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
20801	10	12	30	6	16.4	3.2	25	5	4.04
20802	12	15	30	6	16.5	3.2	100	10	4.48
20803	15	18	30	6	16.6	3.3	50	10	4.87
20804	20	22	30	6	16.8	3.5	50	10	5.62
20805	25	28	30	6	17.9	3.8	50	10	6.94

T-pieces

Geberit Mapress Carbon Steel T-piece, equal (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51332	12	15	90	6.4	3.9	3.2	1.2	1.9	5		11.85
51333	15	18	90	6.8	4.1	3.4	1.4	2.1	5		13.42
51334	20	22	90	7.4	4.4	3.7	1.6	2.3	5		15.50
51335	25	28	90	8.4	5	4.2	1.9	2.7	5		19.48
51336	32	35	90	10	5.7	5	2.4	3.1	5		28.58
51337	40	42	90	11.4	6.5	5.7	2.7	3.5	5		42.66
51338	50	54	90	13.8	7.7	6.9	3.4	4.2	5		54.29
51341	65	76.1	90	23	11	11.5	6.2	5.7		1	251.12
51342	80	88.9	90	26	12.7	13	7	6.7		1	291.14
51343	100	108	90	31	15.3	15.5	8	7.8		1	412.02

Geberit Mapress Carbon Steel T-piece, reduced (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51356	15 / 12 / 15	18	15	18	90	6.8	4.2	3.4	3.4	1.4	2.2	1.4	5		13.16
51357	20 / 12 / 20	22	15	22	90	7.4	4.4	3.7	3.7	1.6	2.4	1.6	5		14.91
51359	20 / 15 / 20	22	18	22	90	7.4	4.4	3.7	3.7	1.6	2.4	1.6	5		14.91
51362	25 / 12 / 25	28	15	28	90	8.4	4.7	4.2	4.2	1.9	2.7	1.9	5		19.56
51364	25 / 15 / 25	28	18	28	90	8.4	4.7	4.2	4.2	1.9	2.7	1.9	5		19.56
51366	25 / 20 / 25	28	22	28	90	8.4	4.8	4.2	4.2	1.9	2.7	1.9	5		19.56
51367	32 / 12 / 32	35	15	35	90	10	5.1	5	5	2.4	3.1	2.4	5		27.71
51368	32 / 15 / 32	35	18	35	90	10	5.1	5	5	2.4	3.1	2.4	5		27.71
51369	32 / 20 / 32	35	22	35	90	10	5.2	5	5	2.4	3.1	2.4	5		27.71
51370	32 / 25 / 32	35	28	35	90	10	5.5	5	5	2.4	3.2	2.4	5		27.71
51373	40 / 20 / 40	42	22	42	90	11.4	5.5	5.7	5.7	2.7	3.4	2.7	5		39.09
51374	40 / 25 / 40	42	28	42	90	11.4	5.8	5.7	5.7	2.7	3.5	2.7	5		39.09
51375	40 / 32 / 40	42	35	42	90	11.4	6.1	5.7	5.7	2.7	3.5	2.7	5		39.09
51378	50 / 20 / 50	54	22	54	90	13.8	6.1	6.9	6.9	3.4	4	3.4	5		50.68
51379	50 / 25 / 50	54	28	54	90	13.8	6.4	6.9	6.9	3.4	4.1	3.4	5		50.68
51380	50 / 32 / 50	54	35	54	90	13.8	6.8	6.9	6.9	3.4	4.2	3.4	5		50.68
51381	50 / 40 / 50	54	42	54	90	13.8	7.2	6.9	6.9	3.4	4.2	3.4	5		50.68
51390	65 / 25 / 65	76.1	28	76.1	90	23	7.5	11.5	11.5	6.2	5.2	6.2		1	251.34
51391	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2		1	251.34

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51392	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2		1	251.34
51393	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2		1	251.34
51396	80 / 25 / 80	88.9	28	88.9	90	26	8.1	13	13	7	5.8	7		1	285.20
51397	80 / 32 / 80	88.9	35	88.9	90	26	8.5	13	13	7	5.9	7		1	285.20
51398	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7		1	285.20
51399	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7		1	285.20
51405	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8		1	388.65
51407	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8		1	388.65
51408	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8		1	388.65

Geberit Mapress Carbon Steel T-piece with female thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51413	12 / 15 / 12	15	1/2	15	90	6.4	3.7	3.2	3.2	1.2	2.4	1.2	5		14.04
51414	15	18	1/2	18	90	6.8	3.9	3.4	3.4	1.4	2.6	1.4	5		14.58
51416	20 / 15 / 20	22	1/2	22	90	7.4	4	3.7	3.7	1.6	2.7	1.6	5		16.62
51417	20 / 20 / 20	22	3/4	22	90	7.4	4.4	3.7	3.7	1.6	2.8	1.6	5		16.62
51418	25 / 15 / 25	28	1/2	28	90	8.4	4.4	4.2	4.2	1.9	3.1	1.9	5		19.33
51419	25 / 20 / 25	28	3/4	28	90	8.4	4.7	4.2	4.2	1.9	3.2	1.9	5		19.33
51421	32 / 15 / 32	35	1/2	35	90	10	4.8	5	5	2.4	3.5	2.4	5		26.15
51422	32 / 20 / 32	35	3/4	35	90	10	5.1	5	5	2.4	3.6	2.4	5		26.15
51424	40 / 15 / 40	42	1/2	42	90	11.4	5.1	5.7	5.7	2.7	3.8	2.7	5		41.09
51425	40 / 20 / 40	42	3/4	42	90	11.4	5.4	5.7	5.7	2.7	3.9	2.7	5		41.09
51427	50 / 15 / 50	54	1/2	54	90	13.8	5.7	6.9	6.9	3.4	4.4	3.4	5		46.09
51428	50 / 20 / 50	54	3/4	54	90	13.8	6	6.9	6.9	3.4	4.5	3.4	5		57.55
51429	50	54	2	54	90	13.8	7.9	6.9	6.9	3.4	5.6	3.4	5		57.55
51437	65 / 20 / 65	76.1	3/4	76.1	90	23	7.4	11.5	11.5	6.2	5.9	6.2		1	225.54
51438	65 / 50 / 65	76.1	2	76.1	90	23	9.1	11.5	11.5	6.2	6.8	6.2		1	225.54
51440	80 / 20 / 80	88.9	3/4	88.9	90	26	8	13	13	7	6.5	7		1	244.89
51441	80 / 50 / 80	88.9	2	88.9	90	26	9.7	13	13	7	7.4	7		1	244.89
51443	100 / 20 / 100	108	3/4	108	90	31	9	15.5	15.5	8	7.5	8		1	356.03

Geberit Mapress Carbon Steel T-piece with female thread and plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	H [cm]	H1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21341	15	18	1/2	18	90	10	3.4	5	5	2.1	25	5	1	9.07
21342	20 / 15 / 20	22	1/2	22	90	10	3.6	5	5	2.3	50	10	1	9.91
21343	25 / 15 / 25	28	1/2	28	90	10	4.3	5	5	3		10	1	11.56
21344	32 / 15 / 32	35	1/2	35	90	11.4	4.7	5.7	5.7	3.4		10	1	16.03
21345	40 / 15 / 40	42	1/2	42	90	13.4	5	6.7	6.7	3.7		10	1	24.95
21346	50 / 15 / 50	54	1/2	54	90	14.6	5.7	7.3	7.3	4.4	25	5	1	26.93

Adaptors, permanent

Geberit Mapress Carbon Steel adaptor with weld-on and plain end



click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Not zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s1 [mm]	s [mm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
12412	12	15	17.2	2.3	1.2	12	3	25	5		7.05
12413	15	18	21.3	2.9	1.2	12	3	25	5		7.26
12414	20	22	26.9	4	1.5	12	3.4	25	5		7.88
12415	25	28	33.7	4.4	1.5	12	3.4	25	5		10.17
12416	32	35	42.4	5.2	1.5	12	4	25	5		11.19
12417	40	42	48.3	4.7	1.5	12	4.5	24	4		14.31
12418	50	54	60.3	4.7	1.5	12	5	24	4		17.63
12419	65	76.1	76.1	3.7	2	12	7	15	5	1	21.55
12420	80	88.9	88.9	4.1	2	12	7.5	5		1	26.97
12421	100	108	114.3	5.2	2	12	9	5		1	32.78

Geberit Mapress Carbon Steel adaptor with male thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	R ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
51453	12 / 15	15	1/2	4.1	2.1	5	9.53
51454	12 / 20	15	3/4	4.3	2.6	5	9.53
51455	15	18	1/2	4.2	2.2	5	10.93
51458	20	22	3/4	4.4	2.3	5	11.74
51461	25	28	1	4.8	2.5	5	16.17
51464	32	35	1 1/4	5.3	2.7	5	20.61
51466	40	42	1 1/2	5.7	2.7	5	24.46
51468	50	54	2	7.1	3.6	5	37.63



Geberit Mapress Carbon Steel adaptor with male thread and plain end



click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	R ["]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21930	10	12	3/8	4.8				1	7.85
21931	10 / 15	12	1/2	5.5				1	7.85
21932	12 / 15	15	1/2	5.7		50	10		7.85
21933	15	18	1/2	5.7		50	5		8.87
21934	15 / 20	18	3/4	5.9			5	1	8.87
21935	20 / 15	22	1/2	5.7		50	5		9.22
21936	20	22	3/4	5.9		50	10		9.22
21937	25	28	1	6.6		50	10		12.38
21938	32	35	1 1/4	8	400		5	1	15.92
21939	40	42	1 1/2	9.1				1	18.23
21940	50	54	2	10.2			5	1	27.54

Geberit Mapress Carbon Steel adaptor with female thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, Ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
51484	12 / 15	15	1/2	3.7	0.4	5	9.53
51486	15	18	1/2	3.7	0.4	5	10.93
51488	20 / 15	22	1/2	3.8	0.3	5	11.95
51489	20	22	3/4	3.9	0.3	5	11.95
51490	20 / 25	22	1	4.2	0.4	5	11.95
51491	25 / 15	28	1/2	3.8	0.2	5	16.17
51492	25 / 20	28	3/4	3.8	0.1	5	16.17
51493	25	28	1	4.4	0.4	5	16.17
51495	32	35	1 1/4	4.9	0.4	5	21.04
51498	40	42	1 1/2	5.3	0.4	5	25.00
51500	50	54	2	6.2	0.5	5	38.38

Geberit Mapress Carbon Steel adaptor with female thread and plain end



click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111


Characteristics

- Outside zinc-plated

Technical data

Technical data									
Product material		Non-alloy steel 1.0034 E195 (EN 10305)							
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21907	10	12	3/8	5.4	4.4			1	7.85
21901	10 / 15	12	1/2	5.8	4.5		5	1	7.85
21908	12 / 10	15	3/8	7.4	6		5	1	7.47
21902	12 / 15	15	1/2	6.1	4.8	50	10		7.85
21903	15	18	1/2	6.1	4.8	50	10		8.59
21904	15 / 20	18	3/4	6.4	4.9		5	1	8.59
21905	20 / 15	22	1/2	6.2	4.9	100	20		9.15
21906	20	22	3/4	6.5	5	25	5		9.15
21910	25 / 15	28	1/2	7.1	5.6		5	1	10.95
21912	32 / 15	35	1/2	7.7	5.2		5	1	15.92
21914	40 / 15	42	1/2	8.1	5.7		5	1	18.59
21916	50 / 15	54	1/2	8.6	6.2		5	1	23.91
21918	65 / 15	76.1	1/2	10.5	8.7			1	61.72
21920	80 / 15	88.9	1/2	11.5	10.2			1	82.31
21922	100 / 15	108	1/2	12.7	11.4			1	120.78

Geberit Mapress Carbon Steel elbow adaptor 90° with male thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111


Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Technical data									
Product material		Non-alloy steel 1.0034 E195 (EN 10305)							
Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
51532	25	28	1	90	5.8	5.4	3.5	5	21.15

Geberit Mapress Carbon Steel elbow adaptor 90° with female thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material		Non-alloy steel 1.0034 E195 (EN 10305)									
Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	GBP/pc.	
51552	25	28	1	90	5.8	5.4	3.5	3.6	5	23.63	

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress Carbon Steel union (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
51772	12	15	3/4	6.6	2.6	5	25.30
51773	15	18	3/4	6.9	2.9	5	29.12
51774	20	22	1	7.2	3	5	36.15
51775	25	28	1 1/4	7.7	3.1	5	58.17
51776	32	35	1 1/2	8.2	3	5	79.47
51777	40	42	1 3/4	9.5	3.5	5	114.45
51778	50	54	2 3/8	11.3	4.3	5	189.84

Geberit Mapress Carbon Steel adaptor union with male thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
51562	12 / 15	15	1/2	3/4	6.1	4.1	5	12.74
51564	15	18	1/2	3/4	6.1	4.1	5	14.56
51567	20	22	3/4	1	6.8	4.7	5	17.97
51570	25	28	1	1 1/4	7.5	5.2	5	27.90
51571	32	35	1 1/4	1 1/2	8	5.4	5	37.64
51572	40	42	1 1/2	1 3/4	8.5	5.5	5	59.98
51573	50	54	2	2 3/8	9.7	6.2	5	134.10

Geberit Mapress Carbon Steel adaptor union with female thread (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
51611	12 / 15	15	1/2	3/4	5.8	2.3	5	13.93
51613	15	18	1/2	3/4	5.8	2.3	5	15.29
51615	20	22	3/4	1	6.3	2.3	5	20.95
51617	25	28	1	1 1/4	7.1	3.3	5	30.16
51618	32	35	1 1/4	1 1/2	7.7	3.5	5	42.87
51619	40	42	1 1/2	1 3/4	8.2	3.1	5	62.37
51620	50	54	2	2 3/8	9.5	3.4	5	136.48

Geberit Mapress Carbon Steel adaptor with union nut (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	G ["]	d _i , ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
51653	12	15	3/4	13	3.7	1.1	5	7.92
51656	15	18	3/4	13	3.7	1.1	5	8.30
51661	20	22	1	20	4	1.1	5	11.59
51665	25	28	1 1/4	26	4.4	1.3	5	15.74
51667	32	35	1 1/2	32	4.8	1.3	5	24.21

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



click & scan

Application purposes

- Suitable exclusively for liquid media

Technical data

Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Not admissible for drinking water installations


Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	20.11
22431	12	20	15	6.7	5.2	10	2	23.45
22422	15	16	18	6.4	4.9	10	2	21.81
22432	15	20	18	6.7	5.2	10	2	25.15

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22423	20	16	22	6.8	5.9	10	2	23.45
22433	20	20	22	6.8	5.9	10	2	26.80
22444	25	25	28	6.8	5.9	10	2	36.85



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Carbon Steel flange PN 10/16, with pressing socket (FKM, blue)

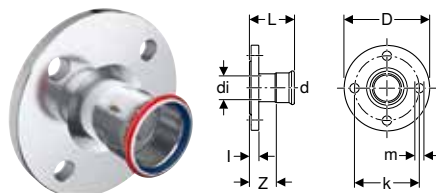

click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
51675	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	63.86
51676	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	94.42
51677	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	109.49
51678	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	143.36
51679	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	217.33
51680	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16		1	258.44
51681	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16		1	324.59

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161

Geberit Mapress Carbon Steel flange PN 6, with plain end

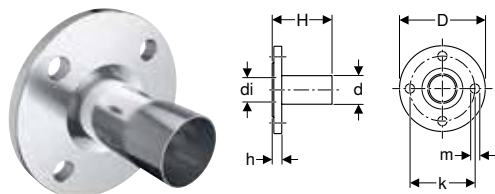

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23764	20	22	19	9	65	11	7.5	1.4	4	6		1	55.31
23765	25	28	25	10	75	11	7.7	1.4	4	6		1	69.09
23766	32	35	32	12	90	14	8.6	1.4	4	6		1	93.31
23767	40	42	39	13	100	14	10.4	1.4	4	6		1	110.60
23768	50	54	51	14	110	14	10.9	1.4	4	6		1	145.12
23769	65	76.1	72	16	130	14	13.2	1.4	4	6	75	1	186.64
23770	80	88.9	84.8	19	150	18	14.8	1.6	4	6	75	1	228.09
23771	100	108	103.9	21	170	18	16.1	1.6	4	6	75	1	269.54

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161
- Geberit flange gasket, fibre composite material PN 6 → p. 104

Geberit Mapress Carbon Steel flange PN 10/16, with plain end

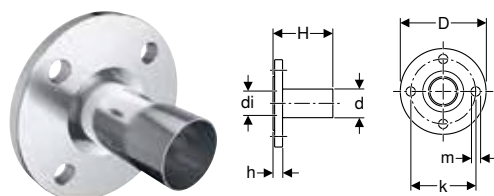

click & scan

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23784	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	54.14
23785	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	67.82
23786	32	35	32	14	100	18	9	1.8	4	10 / 16		1	91.58
23787	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	108.52
23788	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16		1	142.35
23789	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	183.25
23790	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	223.77
23791	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	264.58

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Sealings

Geberit Mapress Carbon Steel cap (FKM, blue)



click & scan

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Carbon Steel → p. 111

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
51752	12	15	2.3	0.3	5		6.76
51753	15	18	2.3	0.3	5		8.19
51754	20	22	2.4	0.3	5		9.13
51755	25	28	2.6	0.3	5		10.62
51756	32	35	2.9	0.3	5		14.64
51757	40	42	3.3	0.3	5		28.99
51758	50	54	3.8	0.3	5		34.89
51761	65	76.1	6	0.7		1	57.82
51762	80	88.9	6.7	0.7		1	81.02
51763	100	108	8.2	0.7		1	121.04

Accessories for Geberit Mapress Carbon Steel

Pipe fastenings

Geberit double nipple M10 / G 1/2"



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.79

Geberit threaded rod



click & scan

Application purposes


- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

Characteristics

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	16.76

Geberit threaded pipe



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	115	2	1	36.07

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10

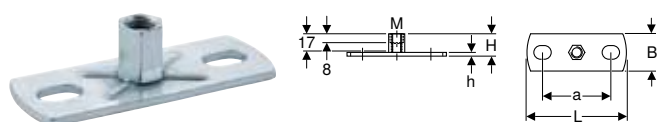

click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes


Characteristics

- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material		Steel								
Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.	
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.50	

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points

Technical data

Technical data

Product material


Steel

- Two fastening points

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	4.04

Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

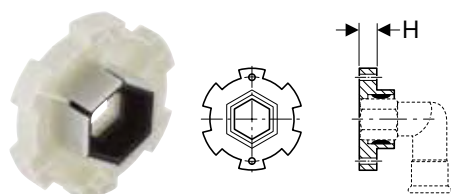

click & scan

Application purposes

- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptors with female thread Rp 1/2"
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread Rp 1/2"

Characteristics

- Sound-absorbing

Technical data

Product material		Duroplast					
Art. no.	H [cm]				SU2 [pc.]	SU1 [pc.]	GBP/pc.
90282	1.3				5	1	9.88

System seals

Geberit Mapress seal ring, CIIR, black



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.46
90402	12	15	50	10		0.46
90403	15	18	50	10		0.59
90404	20	22	50	10		0.59
90405	25	28	50	10		0.64
90406	32	35	50	10		0.64
90407	40	42		10		0.94
90408	50	54		10		0.94
90412	65	66.7	5			2.04
90409	65	76.1			1	2.60
90410	80	88.9			1	3.54
90411	100	108			1	6.87

Geberit Mapress seal ring, FKM, blue



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data


Operating temperature	-25 – +140 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.72
90882	12	15	100	10	1.15
90883	15	18	100	10	1.39
90884	20	22	100	10	1.66
90885	25	28	100	10	1.96
90886	32	35	100	10	2.28
90887	40	42	100	10	4.18
90888	50	54	100	10	5.85
90891	65	76.1	50	5	17.26
90892	80	88.9	50	5	21.47
90893	100	108	25	5	47.87



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C

Geberit Mapress flat gasket, EPDM, black



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221


Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da, ø [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.33
90081	3/4	24	13	2	50	10	0.33
90082	1	30	19.6	2		10	0.33
90083	1 1/4	39	25.6	2		10	0.53
90084	1 1/2	45	32	2		10	0.72
90085	1 3/4	50	39	2		10	0.85
90086	2 3/8	66	51	3		10	1.76
90220	N	2 1/2	72	54		10	4.02
90079	N	2 3/4	78	57		10	4.10
90088	3	84.7	76	3		10	2.66
90089	3 1/2	97	84	3		10	3.14

N: New, available as of January 2025

Geberit Mapress flat gasket, FPM, green

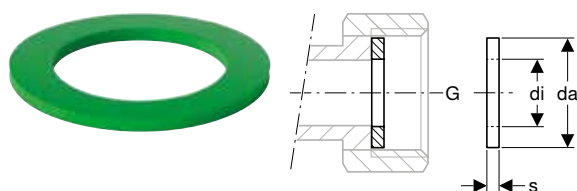

click & scan

Application purposes

- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +140 °C
Product material	FPM

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.87
90094	1	30	19.6	2	10	3.32
90095	1 1/4	39	25.6	2	10	1.43
90096	1 1/2	45	32	2	10	1.76
90097	1 3/4	50	39	2	10	2.49
90098	2 3/8	66	51	2	10	4.55



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C

Geberit Mapress flat gasket fibre composite material



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.079.00.1	1/2	18.4	10	2	5	1.22
600.080.00.1	3/4	23.9	13	2	5	1.45
600.081.00.1	1	30	19.6	2	5	1.60
600.082.00.1	1 1/8	34.7	21	2	5	1.70
600.083.00.1	1 1/4	38	25	2	5	1.94
600.084.00.1	1 1/4	38.7	25.6	2	5	1.94
600.085.00.1	1 1/2	44.6	32	2	5	2.10
600.087.00.1	1 3/4	50.5	39	2	5	2.30
600.088.00.1	2	56.4	42	2	5	2.42
600.089.00.1	2 1/4	62.5	42	2	5	2.54
600.090.00.1	2 3/8	66.2	51	2	5	2.90
600.091.00.1	2 1/2	72	54	2	5	3.27
600.092.00.1	2 3/4	78.3	57	2	5	3.63
600.093.00.1	3	84.7	72.1	2	5	3.99
600.094.00.1	3 1/2	97.1	84.9	2	5	4.36

Geberit flange gasket, fibre composite material PN 6



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, Ø [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
600.051.00.1	15	44	20	2	6	1	1.81
600.052.00.1	20	54	25	2	6	1	2.03
600.053.00.1	25	64	30	2	6	1	2.42
600.054.00.1	32	76	38	2	6	1	2.87
600.055.00.1	40	86	45	2	6	1	3.43
600.056.00.1	50	96	57	2	6	1	4.06
600.057.00.1	65	116	76	2	6	1	5.10
600.058.00.1	80	132	89	2	6	1	6.12
600.059.00.1	100	152	108	2	6	1	7.32

Geberit flange gasket, fibre composite material PN 10/16



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)


Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, Ø [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
600.041.00.1	15	50	20	2	10 / 16		1	2.06
600.042.00.1	20	60	25	2	10 / 16	5	1	2.30
600.043.00.1	25	70	30	2	10 / 16	5	1	2.73
600.044.00.1	32	82	38	2	10 / 16	5	1	3.24
600.045.00.1	40	92	45	2	10 / 16	5	1	3.87
600.046.00.1	50	107	57	2	10 / 16	5	1	4.59
600.047.00.1	65	127	76	2	10 / 16	5	1	5.75
600.048.00.1	80	142	89	2	10 / 16	5	1	6.91
600.049.00.1	100	162	108	2	10 / 16	5	1	8.29

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of zinc-plated steel



click & scan

Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	2.56
91065	10	11	5	3.6	4	2.56
91066	12	14	5	3	4	2.56
91067	12	14	5.5	3.5	4	2.56
91068	12	14	6	4	4	2.56
91069	16	18	5.5	3.3	4	2.56
91070	16	18	6	3.8	4	2.56
91071	16	18	6.5	4.3	4	2.56
91072	16	18	7	4.8	4	2.56
91073	16	18	8	5.8	4	2.56



Geberit Mapress Copper

Preliminary remarks.....	163
Application overview – Geberit Mapress Copper.....	165
Geberit Mapress Copper	166
Couplings	166
Reducers.....	167
Bends	168
T-pieces.....	170
Pipe crosses	172
Adaptors, permanent.....	173
Adaptors and connections, detachable.....	177
Sealings.....	182
Connections	183
T-pieces for heating	184
Connections for heating.....	185
Geberit Mapress Copper, gas.....	188
Couplings	188
Reducers.....	189
Bends	190
T-pieces.....	192
Adaptors, permanent.....	193
Adaptors and connections, detachable.....	195
Sealings.....	196
Connections	197
Geberit Mapress Copper, FKM, blue.....	198
Couplings	198
Reducers.....	199
Bends	200
T-pieces.....	202
Adaptors, permanent.....	203
Adaptors and connections, detachable.....	205
Sealings.....	207
Accessories for Geberit Mapress Copper.....	207
Pipe fastenings.....	207
System seals.....	209
Sets of bolts for flange connections.....	213



Preliminary remarks

Introduction to Geberit Mapress Copper

Geberit Mapress Copper is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

In addition to copper pressfittings, the Geberit Mapress Copper product range includes fittings made of gunmetal and brass.

Benefits of Geberit Mapress Copper

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Hygienic

Meets the requirements of DVGW W 270 regarding microbiological safety

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 158 - 159 for an in depth overview of the applications for Geberit Mapress Copper.

Ensure you are using the correct pipe for Geberit Mapress Copper. BS EN 1057 copper pipe is suitable to press with Geberit Mapress Copper fittings. Please see the Geberit Mapress Installation Guide for more information.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress Copper

Geberit Great Britain, Version: December 2024

06.01.2024
 06.01.2024

Application purposes	Operating temperature	Maximum operating pressure	Pipes	Fittings				
			Copper	Copper white indicator	Gunmetal white indicator	Brass white indicator	Carbon steel, copper-plated	
Liquid media								
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa ⁵⁾	✓	✓	✓			
For cooling and heating water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For cooling and heating water with antifreeze agent	–30 – +120 °C	16 bar / 1600 kPa	✓	✓	✓	✓	✓	
For district heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓	✓		
For service water and process water	0–100 °C	16 bar / 1600 kPa	7)	7)	7)	7)		
For thermal media (solar)	–25 – +220 °C ^{3,4)}	10 bar / 1000 kPa	✓	✓	✓	✓		
For mineral and lubricating oil	Upon request	Upon request	7)	7)	7)			
For motor fuels (e.g. diesel)	Upon request	Upon request	7)	7)	7)			
Gaseous media								
For compressed air (purity class oil 2-3) ¹⁾	0–100 °C	12 bar / 1200 kPa ⁶⁾	✓	✓	✓			
For compressed air (purity class oil 0-X) ¹⁾	0–100 °C	12 bar / 1200 kPa ⁶⁾	✓	✓	✓			
For negative pressure ²⁾	0–100 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓	✓			
For inert gases (e.g. nitrogen)	0–100 °C	12 bar / 1200 kPa ⁶⁾	✓	✓	✓	✓		
For natural gases	–20 – +70 °C	MOP 5 / GT 1	✓	✓	✓	✓		
For liquefied gases & hydrogen blends	–20 – +70 °C	MOP 5 / GT 1	✓	✓	✓	✓		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure results from the air pressure at the installation site minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

²⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

³⁾ Lifetime with collector standstill: 200 h/a at 180 °C; 60 h/a at 200 °C; total 500 h/lifetime at 220 °C

⁴⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

⁵⁾ 10 bar / 1000 kPa for MasterFix and MeplaFix

⁶⁾ Approved up to d54 mm

⁷⁾ Following Geberit approval

⁸⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

	Seal rings				Flat gaskets for screw connections			Flange gaskets
	CIIR, black	EPDM, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Fibre composite material	Fibre composite material
	✓	✓			✓		✓	✓
	✓ ⁴⁾	✓			✓		✓	✓
	✓ ⁴⁾						✓	✓
	✓ ⁴⁾	✓				✓	✓	✓
	7)	7)			7)		7)	7)
			✓			✓	✓	✓
			7)			7)	7)	7)
			7)			7)	7)	7)
	✓ ⁸⁾				✓ ⁸⁾		✓	✓
			✓ ⁸⁾			✓ ⁸⁾	✓	✓
	✓	✓					✓	✓
	✓				✓		✓	✓
				✓			✓	✓
				✓			✓	✓



Geberit Mapress Copper

Couplings

Geberit Mapress Copper coupling



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62001	10	12	4.2	0.8		200	20		2.73
62002	12	15	4.8	0.8	12800	200	20		3.09
62003	15	18	4.8	0.8		100	20		3.88
62004	20	22	5	0.8	8000	200	20		4.66
62005	25	28	5.4	0.8	5000	100	20		8.47
62006	32	35	6.2	1	3200	100	5		11.18
62007	40	42	7.1	1.1	1920	48	4		19.98
62008	50	54	8.3	1.3	768	48	4		24.78
62010	65	66.7	12.7	2.7	400	25	5		62.42
62011	65	76.1	12.7	2.1	192			1	80.43
62012	80	88.9	14.5	2.5	144			1	91.62
62013	100	108	17.6	2.6	80			1	135.52

Geberit Mapress Copper coupling, reduced



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62050	12 / 10	15	12	4	0.3	25	5		12.85
62055	20 / 12	22	15	4.4	0.3		5	1	13.30

Geberit Mapress Copper slip coupling



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62102	12	15	2.5	8	3		100	20		16.35
62103	15	18	2.5	8	3		50	10		18.44

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62104	20	22	2.5	8.4	3.4		100	20		18.89
62105	25	28	3	9.1	3.1		50	10		22.55
62106	32	35	3	10.2	4.2		50	5		29.98
62107	40	42	4	12	4		48	4		41.47
62108	50	54	4	14	6		24	4		44.62
62110	65	66.7	5	22	12		5		1	91.33
62111	65	76.1	5.3	23	12.4				1	116.47
62112	80	88.9	6	26	14	96			1	157.32
62113	100	108	7.5	31	16	50			1	184.74

Reducers

Geberit Mapress Copper reducer with plain end



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Concentric
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62301	12 / 10	15	12	5	3.3		100	20		2.73
62302	15 / 10	18	12	5.4	3.7	4800	50	10		2.73
62303	15 / 12	18	15	5.5	3.5		100	20		2.93
62305	20 / 12	22	15	5.9	3.9		200	20		3.36
62306	20 / 15	22	18	5.7	3.7		100	20		3.36
62307	25 / 12	28	15	6.6	4.6	6400	100	10		8.33
62308	25 / 15	28	18	6.4	4.4	4000	50	10		8.33
62309	25 / 20	28	22	6	3.9		200	20		8.33
62312	32 / 20	35	22	7.1	5	3200	50	10		10.72
62313	32 / 25	35	28	6.8	4.5	3200	100	5		10.72
62316	40 / 20	42	22	8.1	6	2304	24	4		17.56
62317	40 / 25	42	28	7.9	5.6	1920	48	4		17.56
62318	40 / 32	42	35	7.6	5		48	4		17.56
62322	50 / 25	54	28	9.7	7.4	1536	24	4		22.92
62323	50 / 32	54	35	9.6	7	1152	48	4		22.92
62324	50 / 40	54	42	9.2	6.1		48	4		22.92
62325	65 / 25	66.7	28	12	9.7				1	69.28
62326	65 / 32	66.7	35	12.1	9.5				1	69.28
62327	65 / 40	66.7	42	12.1	9.1		5		1	69.28
62328	65 / 50	66.7	54	12.7	9.2	720	5		1	81.53
62329	65 / 32	76.1	35	12.6	10				1	93.17
62330	65 / 40	76.1	42	12.6	9.6				1	93.17
62331	65 / 50	76.1	54	14.6	11.1				1	93.17
62332	65 / 65	76.1	66.7	15.1	10.1				1	93.17
62333	80 / 40	88.9	42	14	11				1	114.82
62334	80 / 50	88.9	54	16.2	12.8				1	114.82
62336	80 / 65	88.9	76.1	16.1	10.8	144			1	114.82
62337	100 / 40	108	42	17.3	14.3	144			1	139.15
62338	100 / 50	108	54	17.3	13.8	96			1	139.15
62339	100 / 65	108	66.7	18.9	13.9	96			1	151.11
62340	100 / 65	108	76.1	18.4	13.1	96			1	151.11
62341	100 / 80	108	88.9	20.3	14.3				1	151.11

Bends

Geberit Mapress Copper bend

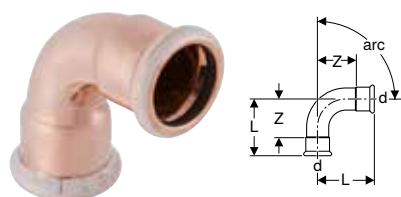

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
60601	10	12	2.6	0.9		150	10		2.93
60602	12	15	2.8	0.8		100	20		3.05
60603	15	18	2.9	0.9		100	20		4.14
60604	20	22	3.2	1.1	6000	200	20		5.09
60605	25	28	3.7	1.4	4000	100	10		10.24
60606	32	35	4	1.4	2400	100	5		21.17
60607	40	42	4.7	1.7	1152	48	4		39.96
60608	50	54	5.7	2.2	768	48	4		55.56
60610	65	66.7	9.2	4.2		5		1	118.59
60611	65	76.1	10.3	5				1	154.60
60612	80	88.9	11.7	5.7				1	190.59
60613	100	108	14.3	6.8				1	232.97
arc / angle: 90°									
60101	10	12	3.1	1.4		200	20		2.93
60102	12	15	3.8	1.8	8000	200	20		3.05
60103	15	18	4.2	2.2		200	20		4.14
60104	20	22	4.7	2.6	5600	140	20		5.09
60105	25	28	5.7	3.4	3000	100	10		10.24
60106	32	35	6.5	3.9	2000	50	5		21.17
60107	40	42	7.6	4.6	1200	50	2		39.96
60108	50	54	9.5	6	480	30	2		55.56
60110	65	66.7	14.1	9.1	320	10		1	101.65
60111	65	76.1	15.7	10.4	144			1	160.95
60112	80	88.9	18.5	12.5				1	190.59
60113	100	108	22.9	15.4	32			1	294.37

Geberit Mapress Copper bend with plain end



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°										
60701	10	12	2.6	3.5	0.9		50	10		2.93
60702	12	15	2.8	3.8	0.8		200	20		3.05
60703	15	18	2.9	3.9	0.9		100	20		4.14

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60704	20	22	3.2	4.4	1.1	6000	200	20		5.09
60705	25	28	3.7	4.5	1.2	4000	100	10		10.24
60706	32	35	4	4.9	1.4	2000	50	10		21.17
60707	40	42	4.7	5.7	1.7	1440	48	4		39.96
60708	50	54	5.7	6.8	2.2		48	4		55.56
60710	65	66.7	9.2	10.1	4.2				1	139.75
60711	65	76.1	10.3	11.1	5				1	160.95
60712	80	88.9	11.7	12.8	5.7				1	190.59
60713	100	108	14.3	15.8	6.8				1	232.97
arc / angle: 90°										
60301	10	12	3.1	4.5	1.4		100	10		2.93
60302	12	15	3.8	5.1	1.8	9600	200	20		3.05
60303	15	18	4.2	5.3	2.2		100	20		4.14
60304	20	22	4.7	6	2.6	5600	140	20		5.09
60305	25	28	5.7	6.5	3.4	3000	100	10		10.24
60306	32	35	6.5	7.4	3.9	2000	50	5		21.17
60307	40	42	7.6	8.6	4.6	768	48	4		39.96
60308	50	54	9.5	10.6	6	576	24	4		55.56
60310	65	66.7	14.1	15	9.1		5		1	118.59
60311	65	76.1	15.9	16.7	10.6				1	160.95
60312	80	88.9	18.5	19.5	12.5				1	190.59
60313	100	108	23	24.1	15.5				1	294.37

Geberit Mapress Copper bend with plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Copper → p. 167


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
60905	25	28	4.3	11.9	0	7.6				1	9.88
60906	32	35	4.1	11.8	0	7.7			10	1	18.47
60907	40	42	4.7	13.7	0	9	240		20	1	30.43
60908	50	54	5.5	14.9	0	9.4				1	41.35
arc / angle: 30°											
60935	25	28	4.8	12.4	0	7.6				1	9.88
60936	32	35	4.6	12.3	0	7.7	600		25	1	18.47
60937	40	42	5.4	14.4	0	9	384		32	1	30.43
60938	50	54	6.3	15.7	0	9.4	384		32	1	41.35
arc / angle: 45°											
60875	25	28	4.5	11.8	0	7.3				1	9.88
60876	32	35	4.9	12.6	0	7.7				1	18.47
60877 P	40	42	5.7	14.7	0	9				1	30.43
60878	50	54	6.8	16.2	0	9.4				1	41.35
arc / angle: 60°											
60955	25	28	6.1	13.7	0	7.6			40	1	9.88
60956	32	35	5.9	13.6	0	7.7	720		15	1	18.47
60957	40	42	6.9	15.9	0	9			20	1	30.43
60958 P	50	54	8.3	17.7	0	9.4	320		5	1	41.35
arc / angle: 90°											
60082	12	15	5.1	11.8	0	6.7	4800	50	10		8.50
60083	15	18	5.3	12.2	0	6.9	3200	25	5	1	8.69
60084	20	22	6	12.8	0	6.8	2000	25	5		8.98
60085	25	28	6.5	14	0	7.5	2000	25	5		9.88
60086	32	35	7.4	15.1	0	7.7	480		10	1	18.47
60087	40	42	8.6	17.6	0	9	1040			1	30.43
60088	50	54	10.6	20	0	9.4				1	41.35

P: Phase out

Geberit Mapress Copper T-piece, reduced



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	d2, $\varnothing$ [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61243	12 / 10 / 10	15	12	12	90	6.7	3.3	3.2	3.5	2	1.6	1.7	2400	25	5		7.54
61252	12 / 10 / 12	15	12	15	90	6.4	3.3	3.2	3.2	1.2	1.6	1.2	4800	50	10		4.82
61104	12 / 20 / 12	15	22	15	90	7.4	3.4	3.7	3.7	1.7	1.3	1.7	3840	80	5	1	7.54
61253	15 / 10 / 15	18	12	18	90	6.8	3.5	3.4	3.4	1.4	1.8	1.4	4800	50	10		6.29
61235	15 / 12 / 12	18	15	15	90	7.4	3.5	3.4	4	1.4	1.5	2	4000	50	10		6.80
61254	15 / 12 / 15	18	15	18	90	6.8	3.5	3.4	3.4	1.4	1.5	1.4	4000	50	10		6.80
61236	15 / 15 / 12	18	18	15	90	7.4	3.4	3.4	4	1.4	1.4	2	2400	100	5	1	6.80
61244	20 / 10 / 20	22	12	22	90	7.4	3.5	3.7	3.7	2.1	1.7	2.1	4000	50	10		8.50
61240	20 / 12 / 12	22	15	15	90	8	3.8	3.7	4.3	1.6	1.8	2.3		50	10		7.54
61256	20 / 12 / 20	22	15	22	90	7.4	3.8	3.7	3.7	1.6	1.8	1.6	4000	100	20		7.54
61257	20 / 15 / 20	22	18	22	90	7.4	3.8	3.7	3.7	1.6	1.8	1.6	3200	50	10		7.54
61242	20 / 20 / 12	22	22	15	90	7.4	3.7	3.7	4.5	1.6	1.6	2.5		50	10		13.47
61259	25 / 12 / 25	28	15	28	90	8.4	4.1	4.2	4.2	1.9	2.1	1.9	3200	50	10		14.90
61260	25 / 15 / 25	28	18	28	90	8.4	4.1	4.2	4.2	1.9	2.1	1.9	2000	50	10		14.90
61261	25 / 20 / 25	28	22	28	90	8.4	4.1	4.2	4.2	1.9	2	1.9	2000	50	10		14.90
61212	32 / 12 / 32	35	15	35	90	10	5.1	5	5	2.4	3.1	2.4	1600	50	10		25.31
61213	32 / 15 / 32	35	18	35	90	10	5	5	5	2.4	3	2.4			5		27.02
61214	32 / 20 / 32	35	22	35	90	10	5.2	5	5	2.4	3.1	2.4	1600	50	10		25.31
61215	32 / 25 / 32	35	28	35	90	10	5.5	5	5	2.4	3.2	2.4	1600	50	10		25.31
61229	40 / 12 / 40	42	15	42	90	11.4	5.4	5.7	5.7	2.7	3.4	2.7		24	4		47.22
61217	40 / 15 / 40	42	18	42	90	11.4	5.4	5.7	5.7	2.7	3.4	2.7				1	47.22
61218	40 / 20 / 40	42	22	42	90	11.4	5.5	5.7	5.7	2.7	3.4	2.7	768	48	4		47.22
61219	40 / 25 / 40	42	28	42	90	11.4	5.8	5.7	5.7	2.7	3.5	2.7		48	4		47.22
61220	40 / 32 / 40	42	35	42	90	11.4	6.2	5.7	5.7	2.7	3.6	2.7		48	4		47.22
61227	50 / 20 / 50	54	22	54	90	13.8	6.1	6.9	6.9	3.4	4	3.4	480	30	2		77.14
61228	50 / 25 / 50	54	28	54	90	13.8	6.4	6.9	6.9	3.4	4.1	3.4	500	10	2		77.14
61225	50 / 32 / 50	54	35	54	90	13.8	6.8	6.9	6.9	3.4	4.2	3.4		24	2		77.14
61226	50 / 40 / 50	54	42	54	90	13.8	7.2	6.9	6.9	3.4	4.2	3.4		10	2		77.14
61280	65 / 20 / 65	66.7	22	66.7	90	22	6.5	11	11	6	4.4	6	250	5		1	207.92
61281	65 / 25 / 65	66.7	28	66.7	90	22	6.8	11	11	6	4.5	6	250	5		1	207.92
61282	65 / 50 / 65	66.7	54	66.7	90	22	8.2	11	11	6	4.7	6		5		1	207.92
61283	65 / 20 / 65	76.1	22	76.1	90	23	7.2	11.5	11.5	6.2	5.1	6.2	144			1	238.17
61284	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2	144			1	238.17
61285	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2	144			1	238.17
61286	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2				1	238.17
61287	65 / 65 / 65	76.1	66.7	76.1	90	23	11	11.5	11.5	6.2	6	6.2				1	238.17
61288	80 / 20 / 80	88.9	22	88.9	90	26	7.8	13	13	7	5.7	7				1	291.22
61289	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7	96			1	291.22
61290	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7				1	291.22
61292	80 / 65 / 80	88.9	76.1	88.9	90	26	11.6	13	13	7	6.3	7				1	291.22
61293	100 / 20 / 100	108	22	108	90	31	8.8	15.5	15.5	8	6.7	8	50			1	317.69
61294	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8	50			1	317.69
61295	100 / 65 / 100	108	66.7	108	90	31	12.6	15.5	15.5	8	7.6	8	50			1	359.99
61296	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8	50			1	359.99
61297	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8				1	359.99



Cu

Geberit Mapress Copper T-piece with female thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61352	10 / 15 / 10	12	1/2	12	90	6.8	2.4	3.4	3.4	1.7	1.1	1.7			5	1	15.20
61354	12 / 15 / 12	15	1/2	15	90	6.8	2.6	3.4	3.4	1.4	1.3	1.4		100	20		15.20
61355	15	18	1/2	18	90	8.2	2.4	4.1	4.1	2.1	1.1	2.1		50	10		15.20
61357	20 / 15 / 20	22	1/2	22	90	8.4	2.6	4.2	4.2	2.1	1.3	2.1	3200	50	10		20.82
61395	20	22	3/4	22	90	9	2.7	4.5	4.5	2.4	1.2	2.4		25	5		20.82
61359	25 / 15 / 25	28	1/2	28	90	8.8	2.9	4.4	4.4	2.1	1.6	2.1	2000	50	10		30.63
61360	25 / 20 / 25	28	3/4	28	90	8.4	3.5	4.2	4.2	1.9	2	1.9		25	5		30.63
61362	32 / 15 / 32	35	1/2	35	90	10	3.5	5	5	2.4	2.2	2.4		50	5		37.24
61366	40 / 15 / 40	42	1/2	42	90	11.4	3.8	5.7	5.7	2.7	2.5	2.7		24	4		45.72
61370	50 / 15 / 50	54	1/2	54	90	13.8	4.4	6.9	6.9	3.4	3.1	3.4		20	2		55.56

Pipe crosses

Geberit Mapress Copper pipe cross 30°, reduced


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61404	15 / 12	18	15	30	6.8	3.9	3.4	1.4	2.2	10	1	33.03
61406	20 / 12	22	15	30	7.4	4.4	3.7	1.6	2.4	5	1	34.95
61409	25 / 12	28	15	30	8.4	4.7	4.2	1.9	2.7	10	1	42.65

Geberit Mapress Copper pipe cross, reduced, offset


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
61504	12	15	15	90	10.8	10.8	2.5	5.4	5.4	3.4	3.4	1	33.03
61505	15 / 12	18	15	90	10.8	10.8	2.5	5.4	5.4	3.4	3.4	1	33.03
61506	20 / 12	22	15	90	10.8	11	2.5	5.4	5.5	3.4	3.4	1	34.95

Adaptors, permanent

Geberit Mapress Copper adaptor socket



click & scan

Application purposes

- For connecting non-system copper pipe diameters
- For transitions from copper pipes to mild steel pipes
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- ø 14 mm to be pressed with Geberit Mapress pressing jaw
- ø 15 mm
- ø 16 mm should be pressed with the Geberit Mapress pressing jaw
- ø 18 mm
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62020	12	15	14	4.1	0.1		5	1	23.31
62022	12	15	16	4.1	0.1	25	5		23.31
62024	15	18	16	4.1	0.1			1	23.31

Geberit FlowFit adaptor to Geberit Mapress, with plain end

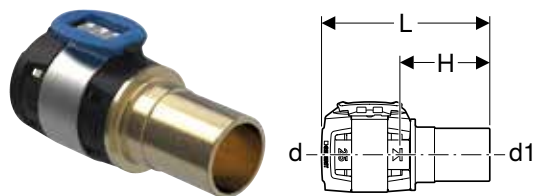

click & scan

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01
620.232.00.1	20	25	22	7	3.7	25	5		13.91
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93
620.234.00.1	32	40	35	8	4.4	25	5		22.24
620.235.00.1	40	50	42	12.8	6.9	10		1	50.07
620.236.00.1	50	63	54	13.8	7.5	5		1	77.86

Geberit Mapress Copper adaptor with male thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, $\varnothing$ [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61701	10	12	3/8	3.2	1.5		150	10		4.08
61745	10 / 15	12	1/2	3.6	1.9		100	10		4.08
61702	12 / 10	15	3/8	3.3	1.3		150	10		4.26
61703	12 / 15	15	1/2	3.6	1.6	9600	200	20		4.26
61714	12 / 20	15	3/4	3.8	1.8		50	10		4.26
61704	15	18	1/2	3.7	1.7		100	20		4.36
61705	15 / 20	18	3/4	3.8	1.8		100	20		4.36
61715	20 / 15	22	1/2	3.8	1.7		100	20		7.30
61707	20	22	3/4	3.9	1.8		200	20		7.30
61716	20 / 25	22	1	4.1	2		100	20		7.30
61717	25 / 20	28	3/4	4.2	1.9		100	20		16.08
61708	25	28	1	4.3	2	4800	100	20		16.08
61718	25 / 32	28	1 1/4	4.4	2.1		50	10		16.08
61719	32 / 25	35	1	4.8	2.2		50	10		32.39
61709	32	35	1 1/4	4.9	2.3		50	10		32.39
61721	40 / 32	42	1 1/4	5.8	2.8		48	4		43.16
61710	40	42	1 1/2	5.8	2.8		48	4		43.16
61711	50	54	2	6.3	2.8		48	4		88.37
61730	65	66.7	2 1/2	9.7	4.7	400	5		1	186.79
61732	65	76.1	2 1/2	10.1	4.8				1	317.69
61733	65 / 80	76.1	3	10.6	5.3				1	317.69
61734	80	88.9	3	11	5				1	377.58

Geberit Mapress Copper adaptor with male thread and plain end


[click & scan](#)

Application purposes


- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, $\varnothing$ [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	3.58
61933	15	18	1/2	5.7		1	4.36
61935	20 / 15	22	1/2	5.7		1	6.68
61936	20	22	3/4	5.9	5	1	6.68

Geberit Mapress Copper adaptor with female thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61845	10	12	3/8	3.1	0.4	100	5	4.08
61801	10 / 15	12	1/2	3.5	0.5	50	10	4.08
61846	12 / 10	15	3/8	3.3	0.3	50	10	4.26
61802	12 / 15	15	1/2	3.8	0.5	200	20	4.26
61823	12 / 20	15	3/4	3.9	0.4	50	10	4.26
61803	15	18	1/2	3.7	0.4	100	20	4.36
61804	15 / 20	18	3/4	3.9	0.4	50	10	4.36
61805	20 / 15	22	1/2	3.6	0.2	50	10	7.30
61806	20	22	3/4	3.9	0.3	100	20	7.30
61824	20 / 25	22	1	4.3	0.5	50	10	7.30
61819	25 / 20	28	3/4	3.9	0.3	50	10	16.08
61809	25	28	1	4.5	0.5	100	10	16.08
61825	25 / 32	28	1 1/4	4.8	0.6	25	5	16.08
61820	32 / 25	35	1	4.6	0.3	50	5	32.39
61811	32	35	1 1/4	5	0.5	50	5	32.39
61821	40 / 32	42	1 1/4	5.2	0.3	24	4	43.16
61814	40	42	1 1/2	5.4	0.5	48	4	43.16
61818	50	54	2	6.3	0.5	24	4	88.37

Geberit Mapress Copper adaptor with female thread and plain end



click & scan

Application purposes


- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	4.6	3.3	5	1	5.36
63559	15	18	1/2	4.6	3.3		1	6.50
63560	15 / 20	18	3/4	4.8	3.3		1	6.50
63561	20 / 15	22	1/2	4.6	3.3	5	1	10.45
63562	20	22	3/4	4.9	3.4	5	1	10.45
63564	32 / 25	35	1	6.3	4.6		1	35.36
63565	50	54	2	8.5	6.2		1	49.45

Geberit Mapress Copper elbow adaptor 90° with male thread

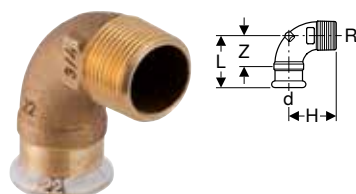
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63892	10	12	3/8	90	3	2.5	1.3			1	14.66
63893	10 / 15	12	1/2	90	3.2	3.1	1.5			1	14.66
63894	12 / 10	15	3/8	90	3.2	2.7	1.2			1	16.06
63873	12 / 15	15	1/2	90	3.5	3.1	1.5	50	10		16.06
63884	15	18	1/2	90	3.5	3.4	1.5	25	5		20.10
63895	15 / 20	18	3/4	90	3.8	3.3	1.8		5	1	20.10
63885	20	22	3/4	90	4.8	4.4	2.7	50	10		25.88
63886	25	28	1	90	5.8	5.3	3.5	25	5		35.27
63887	32	35	1 1/4	90	5.5	4.7	2.9			1	54.29
63888	40	42	1 1/2	90	6.2	5.1	3.2			1	88.66
63889	50	54	2	90	7	6.3	3.5			1	113.05

Geberit Mapress Copper elbow adaptor 90° with female thread


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63860	10	12	3/8	90	3.2	2.3	1.5	1.3			1	14.27
63861	10 / 15	12	1/2	90	3.4	2.4	1.7	1.1			1	14.27
63862	12 / 10	15	3/8	90	3.3	2.4	1.3	1.4			1	16.06
63853	12 / 15	15	1/2	90	3.6	2.7	1.6	1.4	50	10		16.06
63854	15	18	1/2	90	3.6	3	1.6	1.7	25	5		20.10
63863	15 / 20	18	3/4	90	3.8	3.1	1.8	1.6			1	20.10
63864	20 / 15	22	1/2	90	3.8	3.2	1.7	1.9			1	25.88
63855	20	22	3/4	90	4.5	2.7	2.4	1.2	25	5		25.88
63856	25	28	1	90	5.1	3.3	2.8	1.6	25	5		33.76
63857	32	35	1 1/4	90	5.5	4.5	2.9	2.6			1	54.29
63865	40	42	1 1/2	90	6.7	5.2	3.7	3.3			1	88.66
63866	50	54	2	90	7.4	6	3.9	3.7			1	113.05

Adaptors and connections, detachable

Geberit Mapress adaptor with MasterFix

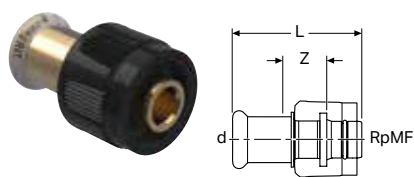

click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61110	12 / 15	15	1/2	5.4	1.8	50	5	31.02

Geberit Mapress adaptor with MasterFix and plain end

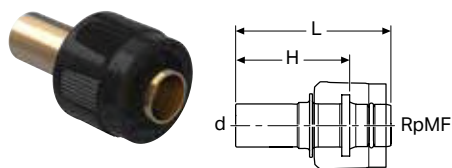

click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61112	12 / 15	15	1/2	5.6	4	30	5	41.60

Geberit Mapress elbow adaptor 90° with MasterFix

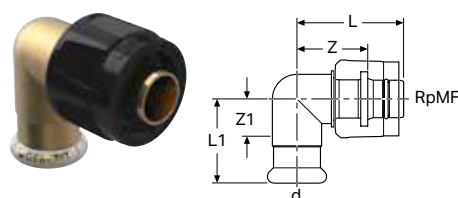

click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61120	12 / 15	15	1/2	90	4.4	3.3	2.8	1.4	50	5	54.14

Geberit Mapress elbow adaptor 90° with MasterFix and plain end

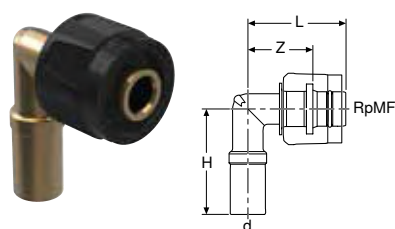

click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Operating pressure	≤ 10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61121	12 / 15	15	1/2	90	4.4	4.5	2.8	30	5	56.77

Geberit Mapress Copper adaptor union with male thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65531	10	12	3/8	1/2	5.1	3.4		5	1	21.12
65540	10 / 15	12	1/2	1/2	5.5	3.8		5	1	21.12
65532	12 / 15	15	1/2	3/4	6.1	4.1	50	5		29.26
65541	12 / 20	15	3/4	3/4	6.3	4.3		5	1	22.78
65533	15	18	1/2	3/4	6.1	4.1	50	5		26.10
65542	15 / 20	18	3/4	3/4	6.3	4.3	25	5		26.10
65534	20 / 15	22	1/2	1	6.7	4.6		5	1	27.18
65543	20	22	3/4	1	6.8	4.7	50	5		43.29
65544	20 / 25	22	1	1	6.9	4.8	25	5		27.18
65535	25	28	1	1 1/4	7.5	5.2	25	5		45.99
65536	32	35	1 1/4	1 1/2	8	5.4	25	5		53.07
65537	40	42	1 1/2	1 3/4	8.5	5.5	24	4		70.73
65538	50	54	2	2 3/8	9.7	6.2	10		1	117.46

Geberit Mapress Copper adaptor union with female thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65481	10 / 15	12	1/2	1/2	5.2	2.2			1	21.12
65482	12 / 15	15	1/2	3/4	5	1.7	25	5		29.26
65490	12 / 20	15	3/4	3/4	5.9	2.4			1	22.78
65483	15	18	1/2	3/4	5	1.7		5	1	26.10
65491	15 / 20	18	3/4	3/4	5.9	2.4		5	1	26.10
65484	20	22	3/4	1	6.2	2.6	50	5		43.29
65492	20 / 25	22	1	1	6.6	2.8		5	1	27.18
65485	25	28	1	1 1/4	6.3	2.3	25	5		45.99
65486	32	35	1 1/4	1 1/2	7.5	3	25	5		53.07
65487	40	42	1 1/2	1 3/4	7.9	3		5	1	70.73
65488	50	54	2	2 3/8	8.5	2.7		5	1	117.46

Geberit Mapress Copper elbow adaptor union 90° with female thread

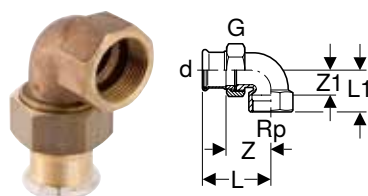

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
65382	12 / 15	15	1/2	3/4	90	5.7	3.2	3.7	1.9	1	33.18
65392	15	18	1/2	3/4	90	5.7	3.2	3.7	1.9	1	34.53
65384	20	22	3/4	1	90	6.4	3.6	4.3	2.1	1	46.40
65385	25	28	1	1 1/4	90	7.2	4.4	4.9	2.7	1	50.34
65386	32	35	1 1/4	1 1/2	90	8	5	5.4	3.1	1	67.59
65387	40	42	1 1/2	1 3/4	90	8.7	5.3	5.7	3.4	1	95.32
65388	50	54	2	2 3/8	90	10.1	6.4	6.6	4.1	1	131.09

Geberit Mapress Copper adaptor with union nut



click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Union nut made of brass
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	G ["]	d _i , ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65081	10	12	1/2	10	3.2	0.9			1	7.88
65182	12	15	1/2	10	5.1	2.5	50	5		8.50
65082	12	15	3/4	13	3.7	1.1	50	10		8.50
65083	15	18	3/4	13	3.7	1.1	50	10		8.98
65040	15	18	1	20	3.9	1.3			1	8.98
65084	20	22	1	20	4	1.1	50	10		13.82
65044	20	22	1 1/4	26	4.3	1.3		5	1	13.82
65045	20	22	1 1/2	32	4.4	1.3		5		13.82
65046	25	28	1	20	5.5	1.3	25	5		13.97
65085	25	28	1 1/4	26	4.4	1.3	50	10		13.97
65050	25	28	1 1/2	32	4.6	1.3		5		13.97
65086	32	35	1 1/2	32	4.8	1.3	50	10		16.28
65051	32	35	2	42	4.8	1.2			1	26.07
65087	40	42	1 3/4	39	5.2	1.3	24	4		30.92
65052	40	42	2	42	5.4	1.4			1	30.92
65053	40	42	2 1/4	42	5.6	1.4			1	30.92
65088	50	54	2 3/8	51	5.8	1.5	24	4		44.06
65054	50	54	2 1/2	54	6.3	1.4			1	44.06
65090	65	76.1	3	73	9.1	2.5			1	394.74
65091	80	88.9	3 1/2	84	9.8	2.4			1	394.74

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



click & scan

Application purposes

- Suitable exclusively for liquid media

Characteristics

- Not admissible for drinking water installations

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	20.11
22431	12	20	15	6.7	5.2	10	2	23.45
22422	15	16	18	6.4	4.9	10	2	21.81
22432	15	20	18	6.7	5.2	10	2	25.15
22423	20	16	22	6.8	5.9	10	2	23.45
22433	20	20	22	6.8	5.9	10	2	26.80
22444	25	25	28	6.8	5.9	10	2	36.85



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Copper flanged stub with plain end, for loose flange PN 10/16



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
63706	25	28	25.2	6.8	8.1	0.2	10 / 16		1	194.71
63707	32	35	32	7.8	9.3	0.2	10 / 16		1	223.07
63708	40	42	39	8.8	10.9	0.2	10 / 16		1	251.80
63709	50	54	51	10.2	10.9	0.2	10 / 16		1	312.28
63710	65	66.7	62.7	12.2	14.2	0.2	10 / 16	96	1	243.83
63711	65	76.1	72.1	12.2	14.5	0.2	10 / 16	96	1	261.49
63712	80	88.9	84.9	13.8	15.2	0.2	10 / 16		1	305.91
63713	100	108	104	15.8	17.4	0.3	10 / 16		1	380.16

To order additionally

- Geberit Mapress loose flange PN 10/16 → p. 184

Accessories

- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress loose flange PN 10/16



click & scan

Application purposes

- For Geberit Mapress Copper flanged stubs with plain end

Characteristics

- Zinc-plated

Technical data

Product material	Non-alloy steel 1.0215 E220 (EN 10305)
------------------	--


Art. no.	DN	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23715	25	31	11.5	85	14	1.6	4	10 / 16		1	74.36
23716	32	39	14	100	18	1.6	4	10 / 16		1	84.71
23717	40	47	15	115	18	1.6	4	10 / 16		1	93.05
23718	50	59	16.5	125	18	1.6	4	10 / 16		1	101.88
23719	65	82	18.5	145	18	1.6	4	10 / 16	192	1	77.29
23720	80	96	20	160	18	1.8	8	10 / 16		1	95.98
23721	100	119	22	180	18	1.8	8	10 / 16		1	126.84

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 161

Sealings

Geberit Mapress Copper cap



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60231	10	12	2	0.3	19200	50	10		5.68
60232	12	15	2.3	0.3	9600	100	20		5.96
60233	15	18	2.3	0.3	4800	50	10		7.44
60234	20	22	2.5	0.4	4800	50	10		9.93
60235	25	28	2.7	0.4	4000	50	10		14.67
60236	32	35	3	0.4	2400	25	5		17.20
60237	40	42	3.4	0.4	2880		5	1	26.58
60238	50	54	3.9	0.4	1680		5	1	34.63
60239	65	66.7	5.9	0.9				1	78.63
60240	65	76.1	6.4	1.1				1	90.75
60241	80	88.9	7.1	1.1				1	110.24
60242	100	108	8.6	1.1				1	150.63

Connections

Geberit Mapress Copper elbow tap connector 90°

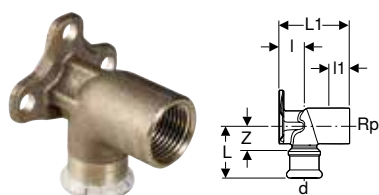

click & scan

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	I [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 3.6 cm												
63458	10 / 15	12	1/2	90	3.4	1.8	1.8	1.7		5	1	24.93
63459	12 / 15	15	1/2	90	3.8	1.8	1.8	1.8	50	10		17.70
63460	15	18	1/2	90	3.8	1.8	1.8	1.8	25	5		26.92
L1 / length: 5.2 cm												
63452	10 / 15	12	1/2	90	3.4	1.8	3.4	1.7	25	5		26.91
63453	12 / 15	15	1/2	90	3.4	1.8	3.4	1.4	50	10		17.70
63455	15	18	1/2	90	3.4	1.8	3.4	1.4		5	1	26.85
63457	20	22	3/4	90	3.7	2.2	3	1.6	25	5		29.56

Geberit Mapress Copper double elbow tap connector 90°

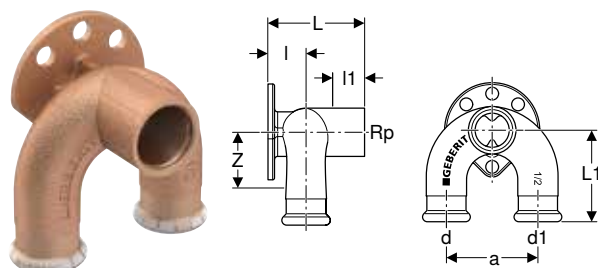

click & scan

Application purposes


- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	a [cm]	L1 [cm]	I [cm]	I1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L / length: 5.2 cm												
63462	12	15	1/2	15	90	5	5	1.8	2.4	3	1	54.28
63463	15	18	1/2	18	90	5	5	2	2.4	3	1	59.46
63464	20	22	1/2	22	90	5	5	1.8	2.4	2.9	1	66.08

Geberit Mapress Copper elbow tap connector 90°, premounted, double


[click & scan](#)

Application purposes

- For potable water
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp [°]	arc [°]	AD [cm]	L [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 3.6 cm													
63473	12	15	1/2	90	15.3	20.5	3.8	9	1.8	1.8	10	1	60.41

T-pieces for heating

Geberit Mapress T-piece crossing with insulation box


[click & scan](#)

Application purposes

- For connecting to two parallel pipes without intersecting
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Technical data

Product material	DR brass CC752S
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63113	12 / 12 / 12	15	15	15	90	19	19	5	5	4.8	5.2	5.3	9.8	5	1	35.33
63115	15 / 12 / 15	18	15	18	90	19	19	5	5	4.8	5.2	5.3	9.8	5	1	102.72
63117	20 / 12 / 20	22	15	22	90	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	107.58
63118	20 / 15 / 20	22	18	22	90	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	107.58

Connections for heating

Geberit Mapress metal pipe connector bend 90° with insulation box and union connector for Euro cone

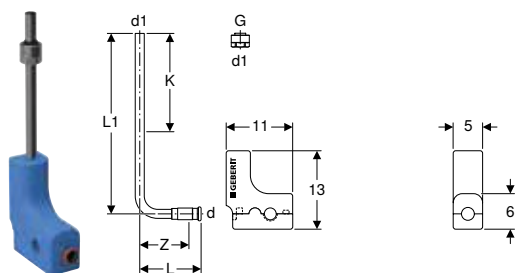

click & scan

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connector bend 90°, made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63126	12 / 20	15	3/4	15	90	10.2	30	8.2	17	20	2	15.55



- Tighten the union as far as it will go

Geberit Mapress metal pipe connector T-piece with insulation box and union connector for Euro cone

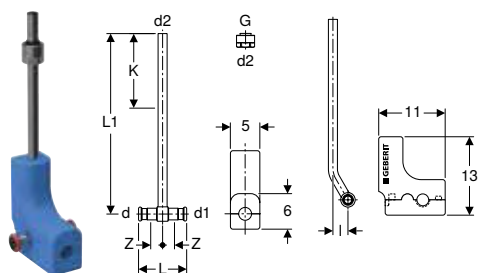

click & scan

Application purposes

- For connecting radiator valves
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connection T-piece made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63127	12 / 20 / 12	15	3/4	15	15	90	8	30	2.5	2	17	20	2	55.58
63128	15 / 20 / 15	18	3/4	18	15	90	9.4	30	2.5	2.7	17	20	2	58.52



- Tighten the union as far as it will go

Geberit Mapress type C connection box

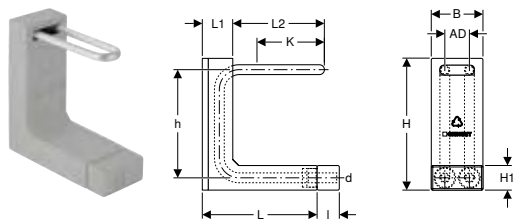
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Characteristics


- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63108	12	15	5	22.3	6.3	17.6	4.5	10.5	27	5	22	13.6	80	10	1	37.30

Geberit Mapress type L connection box

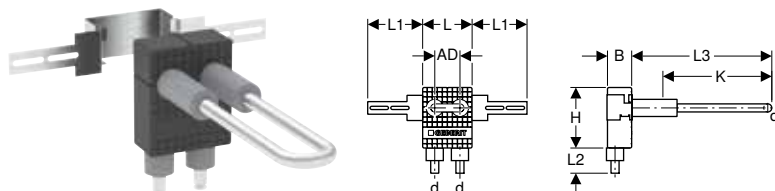
[click & scan](#)

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress Therm

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Scope of delivery


- Installation sheet

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	B [cm]	H [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63109	12	15	5	10	11	5	25	5	12	21	160	10	1	48.64

Geberit Mapress Copper connector T-piece set for return flow

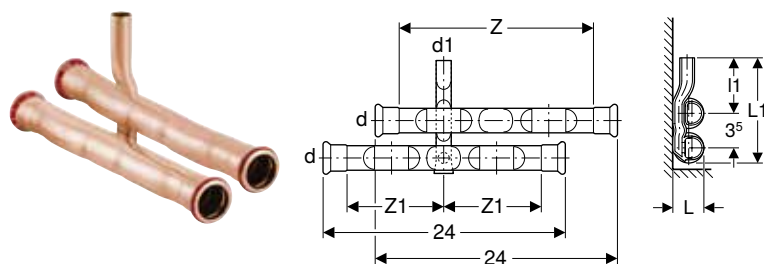

click & scan

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with long connection
- Socket, offset, long

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
23615	12	15	15	90	2.7	10.8	6.5	20	10	1	51.52
23617	20 / 12	22	15	90	3.3	11.2	6.5	20	10	1	61.59

Geberit Mapress Copper set of connector T-pieces for inlet and return flow

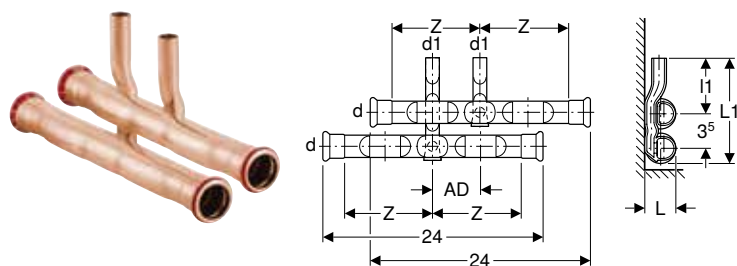

click & scan

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	AD [cm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
24005	12	15	15	90	4–6	2.7	10.8	6.5	10	1	50.51
24006	15 / 12	18	15	90	4–6	2.9	11	6.5	10	1	51.59
24007	20 / 12	22	15	90	4–6	3.3	11.2	6.5	10	1	60.37

Geberit Mapress Copper set of connector T-pieces for inlet and return flow, with union connector for Euro cone

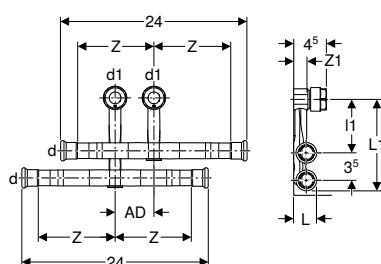

click & scan

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Union connector for Geberit Mapress Stainless Steel 1.4401 system pipes
- Union connector for Geberit Mapress Carbon Steel system pipes
- Union connector for copper pipes, rough, nickel-plated and chrome-plated
- Installation completely in front of the wall


Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	AD [cm]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
24055	12	15	15	90	5	2.7	12.6	6.8	10	1.7	1	96.74
24056	15 / 12	18	15	90	5	2.9	12.7	6.8	10	1.7	1	99.60
24057	20 / 12	22	15	90	5	3.3	13	6.8	9.9	1.7	1	103.97



- Tighten the union as far as it will go

Geberit Mapress Copper, gas Couplings

Geberit Mapress Copper coupling (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34601	12	15	4.8	0.8	50	5		3.74
34602	15	18	4.8	0.8	50	5		4.70
34603	20	22	5	0.8	100	5		5.68
34604	25	28	5.4	0.8	50	5		10.39
34605	32	35	6.2	1	25	5		13.00
34606	40	42	7.1	1.1	24	4		23.19
34607	50	54	8.3	1.3		5	1	28.82

Geberit Mapress Copper slip coupling (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34608	12	15	2.5	8	3	5	1	19.87
34609	15	18	2.5	8	3		1	22.42
34610	20	22	2.5	8.4	3.4	5	1	22.97
34611	25	28	3	9.1	3.1		1	27.49
34612	32	35	3	10.2	4.2		1	34.79
34613	40	42	4	12	4		1	48.13
34614	50	54	4	14	6		1	51.78

Reducers

Geberit Mapress Copper reducer with plain end (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Concentric
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34615	15 / 12	18	15	5.5	3.5		5	1	3.56
34616	20 / 12	22	15	5.9	3.9	50	5		4.13
34617	20 / 15	22	18	5.7	3.7	50	5		4.13
34618	25 / 12	28	15	6.6	4.6		5	1	11.32
34619	25 / 15	28	18	6.4	4.4		5	1	10.17
34620	25 / 20	28	22	6	3.9	50	5		10.17
34623	32 / 20	35	22	7.1	5		5	1	12.45
34624	32 / 25	35	28	6.8	4.5		5	1	12.44
34625	40 / 25	42	28	7.9	5.6		5	1	20.34
34626	40 / 32	42	35	7.6	5		5	1	20.34
34627	50 / 25	54	28	11	8.7			1	26.57
34628	50 / 32	54	35	9.6	7			1	26.57
34629	50 / 40	54	42	9.2	6.2			1	26.57

Bends

Geberit Mapress Copper bend (gas)

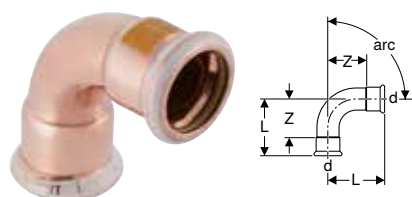

click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34514	12	15	2.8	0.8		50	5		3.73
34515	15	18	2.9	0.9		25	5		5.05
34516	20	22	3.2	1.1		50	5		6.18
34517	25	28	3.7	1.4		50	5		12.45
34518	32	35	4	1.4			5	1	24.59
34519	40	42	4.7	1.7			5	1	46.34
34520	50	54	5.7	2.2			5	1	64.45
arc / angle: 90°									
34500	12	15	3.8	1.8		100	5		3.73
34501	15	18	4.2	2.2		100	5		5.05
34502	20	22	4.7	2.6		100	5		6.18
34503	25	28	5.7	3.4	3200	100	5		12.45
34504	32	35	6.5	3.9		50	5		24.59
34505	40	42	7.6	4.6		24	4		46.34
34506	50	54	9.5	6		24	4		64.45

Geberit Mapress Copper bend with plain end (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34521	12	15	2.8	3.8	0.8	50	5		4.13
34522	15	18	2.9	3.9	0.9	50	5		4.60
34523	20	22	3.2	4.4	1.1	50	5		5.67
34524	25	28	3.7	4.5	1.4	50	5		11.35
34525	32	35	4	4.9	1.4		5	1	22.42
34526	40	42	4.7	5.7	1.7			1	42.33
34527	50	54	5.7	6.8	2.2			1	58.81
arc / angle: 90°									
34507	12	15	3.8	5.1	1.8	50	5		3.73
34508	15	18	4.2	5.3	2.2	50	5		5.05
34509	20	22	4.7	6	2.6	100	5		6.18
34510	25	28	5.7	6.5	3.4	50	5		12.45

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34511	32	35	6.5	7.4	3.9	5		1	24.59
34512	40	42	7.6	8.6	4.6		5	1	46.34
34513	50	54	9.5	10.6	6		5	1	64.45

Geberit Mapress Copper bend with plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Copper → p. 167


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
60905	25	28	4.3	11.9	0	7.6				1	9.88
60906	32	35	4.1	11.8	0	7.7			10	1	18.47
60907	40	42	4.7	13.7	0	9	240		20	1	30.43
60908	50	54	5.5	14.9	0	9.4				1	41.35
arc / angle: 30°											
60935	25	28	4.8	12.4	0	7.6				1	9.88
60936	32	35	4.6	12.3	0	7.7	600		25	1	18.47
60937	40	42	5.4	14.4	0	9	384		32	1	30.43
60938	50	54	6.3	15.7	0	9.4	384		32	1	41.35
arc / angle: 45°											
60875	25	28	4.5	11.8	0	7.3				1	9.88
60876	32	35	4.9	12.6	0	7.7				1	18.47
60877 P	40	42	5.7	14.7	0	9				1	30.43
60878	50	54	6.8	16.2	0	9.4				1	41.35
arc / angle: 60°											
60955	25	28	6.1	13.7	0	7.6			40	1	9.88
60956	32	35	5.9	13.6	0	7.7	720		15	1	18.47
60957	40	42	6.9	15.9	0	9			20	1	30.43
60958 P	50	54	8.3	17.7	0	9.4	320		5	1	41.35
arc / angle: 90°											
60082	12	15	5.1	11.8	0	6.7	4800	50	10		8.50
60083	15	18	5.3	12.2	0	6.9	3200	25	5	1	8.69
60084	20	22	6	12.8	0	6.8	2000	25	5		8.98
60085	25	28	6.5	14	0	7.5	2000	25	5		9.88
60086	32	35	7.4	15.1	0	7.7	480		10	1	18.47
60087	40	42	8.6	17.6	0	9	1040			1	30.43
60088	50	54	10.6	20	0	9.4				1	41.35

P: Phase out

Geberit Mapress Copper pipe bridge

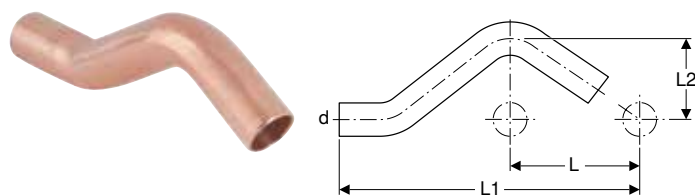

click & scan

Application purposes

- Application overview – Geberit Mapress Copper → p. 167


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60802	12	15	30	6	16.5	3.2	2400	25	5		11.56
60803	15	18	30	6	16.6	3.3	4000	50	5	1	11.23
60804	20	22	30	6	16.8	3.5	2000		5	1	20.28

T-pieces

Geberit Mapress Copper T-piece, equal (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34528	12	15	90	6.4	3.2	3.2	1.2	1.2	50	5		6.29
34529	15	18	90	6.8	3.4	3.4	1.4	1.4		5	1	8.28
34530	20	22	90	7.4	3.7	3.7	1.6	1.6	50	5		10.18
34531	25	28	90	8.4	4.2	4.2	1.9	1.9	25	5		18.10
34532	32	35	90	10	5.9	5	2.4	3.3		5	1	29.55
34533	40	42	90	11.4	6.6	5.7	2.7	3.6			1	58.41
34534	50	54	90	13.8	7.8	6.9	3.4	4.3			1	74.90

Geberit Mapress Copper T-piece, reduced (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34535	15 / 12 / 15	18	15	18	90	6.8	3.5	3.4	3.4	1.4	1.5	1.4			1	8.28
34553	20 / 12 / 12	22	15	15	90	8	3.8	3.7	4.3	1.6	1.8	2.3		5	1	8.35
34536	20 / 12 / 20	22	15	22	90	7.4	3.8	3.7	3.7	1.6	1.8	1.6	25	5		9.15
34537	20 / 15 / 20	22	18	22	90	7.4	3.8	3.7	3.7	1.6	1.8	1.6		5	1	9.15
34554	20 / 20 / 12	22	22	15	90	8.3	3.7	3.7	4.6	1.6	1.6	2.6		5	1	8.35
34588	25 / 12 / 25	28	15	28	90	8.4	4.1	4.2	4.2	1.9	2.1	1.9		5	1	17.29
34589	25 / 15 / 25	28	18	28	90	8.4	4.1	4.2	4.2	1.9	2.1	1.9			1	17.29
34590	25 / 20 / 25	28	22	28	90	8.4	4.1	4.2	4.2	1.9	2	1.9		5	1	17.29
34543	32 / 20 / 32	35	22	35	90	10	5.2	5	5	2.4	3.1	2.4		5	1	29.34
34544	32 / 25 / 32	35	28	35	90	10	5.5	5	5	2.4	3.2	2.4			1	29.34
34545	40 / 20 / 40	42	22	42	90	11.4	5.5	5.7	5.7	2.7	3.4	2.7			1	54.77
34546	40 / 25 / 40	42	28	42	90	11.4	5.8	5.7	5.7	2.7	3.5	2.7			1	54.77
34547	40 / 32 / 40	42	35	42	90	11.4	6.2	5.7	5.7	2.7	3.6	2.7			1	54.77
34548	50 / 20 / 50	54	22	54	90	13.8	6.1	6.9	6.9	3.4	4	3.4			1	89.59
34549	50 / 25 / 50	54	28	54	90	13.8	6.4	6.9	6.9	3.4	4.1	3.4			1	89.59
34550	50 / 32 / 50	54	35	54	90	13.8	6.8	6.9	6.9	3.4	4.2	3.4			1	89.59
34551	50 / 40 / 50	54	42	54	90	13.8	7.2	6.9	6.9	3.4	4.2	3.4			1	89.59

Geberit Mapress Copper T-piece with female thread (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	DR brass CW602N
------------------	-----------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34735	12 / 15 / 12	15	1/2	15	90	7.4	2.6	3.7	3.7	1.7	1.6	1.7		1	18.53
34736	15	18	1/2	18	90	7.4	2.4	3.7	3.7	1.7	1.6	1.7		1	18.53
34740	20 / 15 / 20	22	1/2	22	90	8	2.6	4	4	1.9	1.8	1.9	5	1	24.18
34737	20	22	3/4	22	90	8	2.7	4	4	1.9	2.1	1.9		1	25.40
34738	25 / 15 / 25	28	1/2	28	90	8.4	2.9	4.2	4.2	1.9	2.3	1.9	5	1	37.34
34739	25 / 20 / 25	28	3/4	28	90	8.4	3.5	4.2	4.2	1.9	2.1	1.9		1	37.31

Adaptors, permanent

Geberit Mapress Copper adaptor with male thread (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34666	12 / 15	15	1/2	3.6	1.6	50	5		5.36
34675	12 / 20	15	3/4	3.8	1.8			1	5.22
34667	15	18	1/2	3.7	1.7	50	5		5.35
34676	15 / 20	18	3/4	3.8	1.8	50	5		5.35
34669	20 / 15	22	1/2	3.8	1.7	50	5		8.94
34670	20	22	3/4	3.9	1.8	100	5		8.94
34677	20 / 25	22	1	4.1	2	50	5		8.94
34678	25 / 20	28	3/4	4.2	1.9		5	1	19.56
34671	25	28	1	4.3	2	50	5		19.56
34679	32 / 25	35	1	4.8	2.2		5	1	37.61
34672	32	35	1 1/4	4.9	2.3	25	5		37.61
34673	40	42	1 1/2	5.8	2.8	24	4		50.16
34674	50	54	2	6.3	2.8		5	1	102.62

Geberit Mapress Copper adaptor with male thread and plain end


[click & scan](#)


Application purposes

- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)					
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	3.58
61933	15	18	1/2	5.7		1	4.36
61935	20 / 15	22	1/2	5.7		1	6.68
61936	20	22	3/4	5.9	5	1	6.68

Geberit Mapress Copper adaptor with female thread (gas)


[click & scan](#)

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)							
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34683	12 / 15	15	1/2	3.8	0.5	50	5		5.22
34693	12 / 20	15	3/4	3.9	0.4			1	5.22
34684	15	18	1/2	3.7	0.4	50	5		5.35
34685	15 / 20	18	3/4	3.9	0.4		5	1	5.35
34686	20 / 15	22	1/2	3.6	0.2	25	5		8.94
34687	20	22	3/4	3.9	0.3	50	5		8.94
34688	20 / 25	22	1	4.3	0.5	25	5		8.94
34689	25	28	1	4.5	0.5	50	5		19.56
34690	32	35	1 1/4	5	0.5		5	1	37.61
34691	40	42	1 1/2	5.4	0.5			1	50.16
34692	50	54	2	6.3	0.5			1	102.62

Geberit Mapress Copper adaptor with female thread and plain end


[click & scan](#)


Application purposes

- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)			
L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
4.6	3.3	5	1	5.36	
4.6	3.3		1	6.50	
4.8	3.3		1	6.50	
4.6	3.3	5	1	10.45	
4.9	3.4	5	1	10.45	
6.3	4.6		1	35.36	
8.5	6.2		1	49.45	

Geberit Mapress Copper elbow adaptor 90° with male thread (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34728	12 / 15	15	1/2	90	3.5	3.1	1.5	25	5		19.54
34729	15	18	1/2	90	3.5	3.4	1.5			1	24.44
34730	20	22	3/4	90	3.8	3.7	1.7		5	1	31.54

Geberit Mapress Copper elbow adaptor 90° with female thread (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34725	12 / 15	15	1/2	90	3.6	2.7	1.6	1.7		1	19.54
34726	15	18	1/2	90	3.6	3	1.6	2		1	24.44
34727	20	22	3/4	90	4.5	3.3	2.4	2.1	5	1	31.54

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress Copper adaptor with union nut (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Conical-sealing
- Marked in yellow
- Union nut made of brass
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34556	20	22	1 1/8	3.7	1.6	5	1	16.10
34552	20	22	1 3/8	4	1.9		1	15.36
34557	25	28	1 3/8	4	1.7	5	1	16.16

Geberit Mapress Copper flange PN 10/16, with pressing socket (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug
- Type A (smooth sealing surface), EN 1092-1


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	H [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
34715	25	28	26	11.5	85	14	5.7	1.4	3.4	4	10 / 16	1	614.12

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Sealings

Geberit Mapress Copper cap (gas)



click & scan

Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34752	12	15	2.3	0.3	5		1	6.58
34753	15	18	2.3	0.3			1	8.25
34754	20	22	2.5	0.4		5	1	11.00
34755	25	28	2.7	0.4			1	16.23
34756	32	35	3	0.4			1	18.10
34757	40	42	3.4	0.4			1	28.11
34758	50	54	3.9	0.4			1	36.63

Connections

Geberit Mapress Copper elbow tap connector 90° (gas)



click & scan

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm													
34731	12	15	1/2	90	3.2	1.3	2.2	1.2	3600	25	5		21.54
34732	15	18	1/2	90	3.2	1.3	2.2	1.2			5	1	32.78
L1 / length: 5.1 cm													
34733	20	22	3/4	90	3.5	1.7	2.2	1.4			5	1	36.04

Geberit Mapress Copper elbow tap connector 90°, offset, circular hole 50 mm (gas)



click & scan

Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	DR brass CW602N
------------------	-----------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole ø 50 mm
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm										
91103	20	22	3/4	90	4.2	3	1.8	2.1	1	38.63
91105	20 / 25	22	1	90	4.2	3	2.2	2.1	1	31.27
91104	25 / 20	28	3/4	90	4.4	3	1.8	2.1	1	41.25
91106	25	28	1	90	4.4	3	2.2	2.1	1	33.37

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 61

Geberit Mapress mounting bracket for gas metre

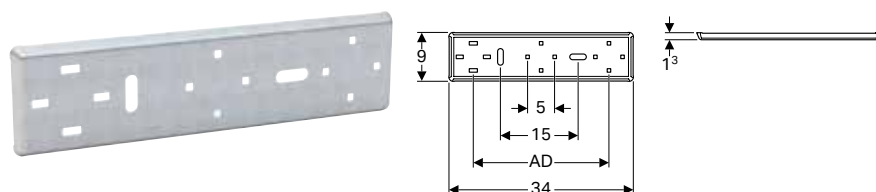

click & scan

Application purposes

- For one- and two-pipe gas metres

Technical data

Product material	Steel
------------------	-------

Characteristics

- Connecting distance adjustable by ± 3 mm at the gas metre
- Zinc-plated
- Circular hole $\varnothing 50$ mm

Scope of delivery

- Fastening material

Art. no.	AD [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91096	25	10	1	25.78

Geberit Mapress Copper, FKM, blue Couplings

Geberit Mapress Copper coupling (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, $\varnothing$ [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52062	12	15	4.8	0.8	5	5.09
52063	15	18	4.8	0.8	5	6.61
52064	20	22	5	0.8	5	8.47
52065	25	28	5.4	0.8	5	13.52
52066	32	35	6.2	1	5	17.85
52067	40	42	7.1	1.1	5	29.80
52068	50	54	8.3	1.3	5	40.57

Geberit Mapress Copper slip coupling (FKM, blue)



[click & scan](#)

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52082	12	15	2.5	8	3	5	19.77
52083	15	18	2.5	8	3	5	22.53
52084	20	22	2.5	8.4	3.4	5	23.97
52085	25	28	3	9.1	3.1	5	28.29
52086	32	35	3	10.2	4.2	5	37.60
52087	40	42	4	12	4	5	52.37
52088	50	54	4	14	6	5	61.34

Reducers

Geberit Mapress Copper reducer with plain end (FKM, blue)



[click & scan](#)

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Pressing indicator
- Concentric
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
52133	15 / 12	18	15	5.5	3.5	5	4.27
52134	20 / 12	22	15	5.9	3.9	5	5.15
52135	20 / 15	22	18	5.7	3.7	5	5.15
52136	25 / 12	28	15	6.6	4.6	5	10.76
52137	25 / 15	28	18	6.4	4.4	5	10.76
52138	25 / 20	28	22	6	3.9	5	10.76
52141	32 / 20	35	22	7.1	5	5	13.65
52142	32 / 25	35	28	6.8	4.5	5	13.65
52145	40 / 20	42	22	8.1	6	5	21.54
52146	40 / 25	42	28	7.9	5.6	5	21.54
52147	40 / 32	42	35	7.6	5	5	21.54
52152	50 / 32	54	35	9.6	7	5	28.40
52153	50 / 40	54	42	9.1	6.1	5	28.40

Bends

Geberit Mapress Copper bend (FKM, blue)

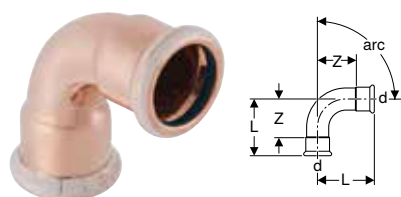

[click & scan](#)

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
arc / angle: 45°							
52222	12	15	2.8	0.8		5	5.09
52223	15	18	2.9	0.9		5	7.25
52224	20	22	3.2	1.1		5	9.07
52225	25	28	3.7	1.4		5	15.34
52226	32	35	4	1.4		5	28.33
52227	40	42	4.7	1.7		5	50.76
52228	50	54	5.7	2.2		5	69.30
arc / angle: 90°							
52282	12	15	3.8	1.8		5	5.09
52283	15	18	4.2	2.2		5	7.25
52284	20	22	4.7	2.6	50	5	9.07
52285	25	28	5.7	3.4		5	15.34
52286	32	35	6.5	3.9		5	28.33
52287	40	42	7.6	4.6		5	48.35
52288	50	54	9.5	6		5	69.30

Geberit Mapress Copper bend with plain end (FKM, blue)



[click & scan](#)

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
arc / angle: 45°							
52242	12	15	2.8	3.8	0.8	5	5.09
52243	15	18	2.9	3.9	0.9	5	7.25
52244	20	22	3.2	4.4	1.1	5	9.07
52245	25	28	3.7	4.5	1.2	5	15.34
52246	32	35	4	4.9	1.4	5	28.33
52247	40	42	4.7	5.7	1.7	5	50.76
52248	50	54	5.7	6.8	2.2	5	69.30
arc / angle: 90°							
52312	12	15	3.8	5.1	1.8	5	5.09
52313	15	18	4.2	5.3	2.2	5	7.25
52314	20	22	4.7	6	2.6	5	9.07
52315	25	28	5.7	6.5	3.4	5	15.34

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52316	32	35	6.5	7.4	3.9	5	28.33
52317	40	42	7.6	8.6	4.6	5	48.35
52318	50	54	9.5	10.6	6	5	69.30

Geberit Mapress Copper bend with plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress Copper → p. 167


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
60905	25	28	4.3	11.9	0	7.6				1	9.88
60906	32	35	4.1	11.8	0	7.7			10	1	18.47
60907	40	42	4.7	13.7	0	9	240		20	1	30.43
60908	50	54	5.5	14.9	0	9.4				1	41.35
arc / angle: 30°											
60935	25	28	4.8	12.4	0	7.6				1	9.88
60936	32	35	4.6	12.3	0	7.7	600		25	1	18.47
60937	40	42	5.4	14.4	0	9	384		32	1	30.43
60938	50	54	6.3	15.7	0	9.4	384		32	1	41.35
arc / angle: 45°											
60875	25	28	4.5	11.8	0	7.3				1	9.88
60876	32	35	4.9	12.6	0	7.7				1	18.47
60877 P	40	42	5.7	14.7	0	9				1	30.43
60878	50	54	6.8	16.2	0	9.4				1	41.35
arc / angle: 60°											
60955	25	28	6.1	13.7	0	7.6			40	1	9.88
60956	32	35	5.9	13.6	0	7.7	720		15	1	18.47
60957	40	42	6.9	15.9	0	9			20	1	30.43
60958 P	50	54	8.3	17.7	0	9.4	320		5	1	41.35
arc / angle: 90°											
60082	12	15	5.1	11.8	0	6.7	4800	50	10		8.50
60083	15	18	5.3	12.2	0	6.9	3200	25	5	1	8.69
60084	20	22	6	12.8	0	6.8	2000	25	5		8.98
60085	25	28	6.5	14	0	7.5	2000	25	5		9.88
60086	32	35	7.4	15.1	0	7.7	480		10	1	18.47
60087	40	42	8.6	17.6	0	9	1040			1	30.43
60088	50	54	10.6	20	0	9.4				1	41.35

P: Phase out

Geberit Mapress Copper pipe bridge

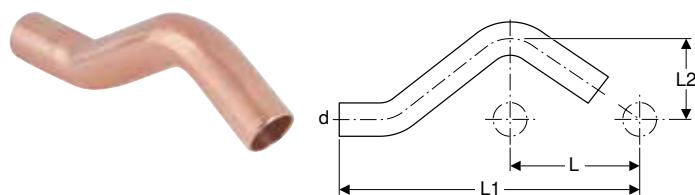

click & scan

Application purposes

- Application overview – Geberit Mapress Copper → p. 167


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60802	12	15	30	6	16.5	3.2	2400	25	5		11.56
60803	15	18	30	6	16.6	3.3	4000	50	5	1	11.23
60804	20	22	30	6	16.8	3.5	2000		5	1	20.28

T-pieces

Geberit Mapress Copper T-piece, equal (FKM, blue)

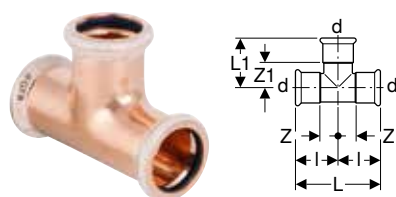

click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	GBP/pc.
52332	12	15	90	6.4	3.1	3.2	1.2	1.2	5	8.52
52333	15	18	90	6.8	3.4	3.4	1.4	1.4	5	11.83
52334	20	22	90	7.4	3.7	3.7	1.6	1.6	5	14.96
52335	25	28	90	8.4	4.2	4.2	1.9	1.9	5	22.54
52336	32	35	90	10	5.9	5	2.4	3.3	5	36.04
52337	40	42	90	11.4	6.6	5.7	2.7	3.6	5	66.94
52338	50	54	90	13.8	7.8	6.9	3.4	4.3	5	89.49

Geberit Mapress Copper T-piece, reduced (FKM, blue)

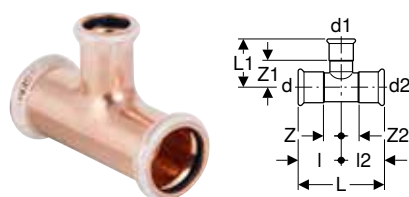

click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	GBP/pc.
52356	15 / 12 / 15	18	15	18	90	6.8	3.5	3.4	3.4	1.4	1.5	1.4	5	11.83
52359	20 / 15 / 20	22	18	22	90	7.4	3.8	3.7	3.7	1.6	1.8	1.6	5	13.44
52366	25 / 20 / 25	28	22	28	90	8.4	4.1	4.2	4.2	1.9	2	1.9	5	22.54
52369	32 / 20 / 32	35	22	35	90	10	5.2	5	5	2.4	3.1	2.4	5	35.72
52370	32 / 25 / 32	35	28	35	90	10	5.5	5	5	2.4	3.2	2.4	5	35.72
52373	40 / 20 / 40	42	22	42	90	11.4	5.5	5.7	5.7	2.7	3.4	2.7	5	62.83
52374	40 / 25 / 40	42	28	42	90	11.4	5.8	5.7	5.7	2.7	3.5	2.7	5	62.83
52375	40 / 32 / 40	42	35	42	90	11.4	6.2	5.7	5.7	2.7	3.6	2.7	5	62.83
52378	50 / 20 / 50	54	22	54	90	13.8	6.1	6.9	6.9	3.4	4	3.4	5	107.00
52379	50 / 25 / 50	54	28	54	90	13.8	6.4	6.9	6.9	3.4	4.1	3.4	5	107.00
52380	50 / 32 / 50	54	35	54	90	13.8	6.8	6.9	6.9	3.4	4.2	3.4	5	107.00

Geberit Mapress Copper T-piece with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52413	12 / 15 / 12	15	1/2	15	90	6.8	2.6	3.4	3.4	1.4	1.3	1.4	5		17.77
52414	15	18	1/2	18	90	8.2	2.4	4.1	4.1	2.1	1.1	2.1		1	18.15
52416	20 / 15 / 20	22	1/2	22	90	8.4	2.6	4.2	4.2	2.1	1.3	2.1	5		25.56
52418	25 / 15 / 25	28	1/2	28	90	8.8	2.9	4.4	4.4	2.1	1.6	2.1	5		37.88
52421	32 / 15 / 32	35	1/2	35	90	10	3.5	5	5	2.4	2.2	2.4		1	45.21
52424	40 / 15 / 40	42	1/2	42	90	11.4	3.8	5.7	5.7	2.7	2.5	2.7		1	56.83
52427	50 / 15 / 50	54	1/2	54	90	13.8	4.4	6.9	6.9	3.4	3.1	3.4		1	69.30

Adaptors, permanent

Geberit Mapress Copper adaptor with male thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
52453	12 / 15	15	1/2	3.6	1.6	5	5.46
52454	12 / 20	15	3/4	3.8	1.8	5	5.46
52455	15	18	1/2	3.7	1.7	5	5.26
52456	15 / 20	18	3/4	3.8	1.8	5	5.26
52457	20 / 15	22	1/2	3.8	1.7	5	9.13
52458	20	22	3/4	3.9	1.8	5	9.13
52460	25 / 20	28	3/4	4.2	1.9	5	19.31
52461	25	28	1	4.3	2	5	19.31
52464	32	35	1 1/4	4.9	2.3	5	36.40
52465	40 / 32	42	1 1/4	5.8	2.8	5	48.38
52466	40	42	1 1/2	5.8	2.8	5	48.38
52468	50	54	2	6.3	2.8	5	100.22

Geberit Mapress Copper adaptor with male thread and plain end



click & scan


Application purposes

- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)					
Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	3.58
61933	15	18	1/2	5.7		1	4.36
61935	20 / 15	22	1/2	5.7		1	6.68
61936	20	22	3/4	5.9	5	1	6.68

Geberit Mapress Copper adaptor with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167


Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)					
Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52484	12 / 15	15	1/2	3.8	0.5	5	5.46
52486	15	18	1/2	3.7	0.4	5	5.54
52488	20 / 15	22	1/2	3.6	0.2	5	9.54
52489	20	22	3/4	3.9	0.3	5	9.54
52493	25	28	1	4.5	0.5	5	20.27
52495	32	35	1 1/4	5	0.5	5	38.24
52498	40	42	1 1/2	5.4	0.5	5	50.82
52500	50	54	2	6.3	0.5	5	105.28

Geberit Mapress Copper adaptor with female thread and plain end



click & scan


Application purposes

- Application overview – Geberit Mapress Copper → p. 167

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)			
L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
4.6	3.3	5	1	5.36	
4.6	3.3		1	6.50	
4.8	3.3		1	6.50	
4.6	3.3	5	1	10.45	
4.9	3.4	5	1	10.45	
6.3	4.6		1	35.36	
8.5	6.2		1	49.45	

Geberit Mapress Copper elbow adaptor 90° with male thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52524	12 / 15	15	1/2	90	3.5	3.1	1.5	5		18.16
52526	15	18	1/2	90	3.5	3.4	1.5		1	22.68
52529	20	22	3/4	90	4.8	4.4	2.7		1	29.30
52532	25	28	1	90	5.8	5.3	3.5		1	39.42

Geberit Mapress Copper elbow adaptor 90° with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52544	12 / 15	15	1/2	90	3.6	2.7	1.6	1.4	5		18.16
52546	15	18	1/2	90	3.6	3	1.6	1.7		1	22.68
52549	20	22	3/4	90	4.5	2.7	2.4	1.2		1	29.30
52552	25	28	1	90	5.1	3.3	2.8	1.6		1	37.78

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress Copper adaptor union with male thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Characteristics


- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
52562	12 / 15	15	1/2	3/4	6.1	4.1	5	32.37
52564	15	18	1/2	3/4	6.1	4.1	5	28.98
52566	20 / 15	22	1/2	1	6.7	4.6	5	30.64
52567	20	22	3/4	1	6.8	4.7	5	46.40
52568	20 / 25	22	1	1	6.9	4.8	5	30.64
52570	25	28	1	1 1/4	7.5	5.2	5	48.63
52571	32	35	1 1/4	1 1/2	8	5.4	5	58.94
52572	40	42	1 1/2	1 3/4	8.5	5.5	5	79.23
52573	50	54	2	2 3/8	9.7	6.2	5	130.58

Geberit Mapress Copper adaptor union with female thread (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52611	12 / 15	15	1/2	3/4	5	1.7	5	32.37
52612	12 / 20	15	3/4	3/4	5.9	2.4	5	25.25
52613	15	18	1/2	3/4	5	1.7	5	28.98
52615	20	22	3/4	1	6.2	2.6	5	46.40
52616	20 / 25	22	1	1	6.6	2.8	5	29.18
52617	25	28	1	1 1/4	6.3	2.3	5	48.63
52618	32	35	1 1/4	1 1/2	7.5	3	5	58.94
52619	40	42	1 1/2	1 3/4	7.9	3	5	79.23
52620	50	54	2	2 3/8	8.5	2.7	5	130.58

Geberit Mapress Copper adaptor with union nut (FKM, blue)



click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of ≤ di, see table
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 167

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52653	12	15	3/4	13	3.7	1.1	5	10.18
52656	15	18	3/4	13	3.7	1.1	5	11.04
52661	20	22	1	20	4	1.1	5	16.51
52664	25	28	1	20	4	1.3	5	16.58
52665	25	28	1 1/4	26	4.4	1.3	5	16.58
52667	32	35	1 1/2	32	4.8	1.3	5	20.16

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



click & scan

Application purposes

- Suitable exclusively for liquid media

Technical data

Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Not admissible for drinking water installations

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	20.11
22431	12	20	15	6.7	5.2	10	2	23.45
22422	15	16	18	6.4	4.9	10	2	21.81
22432	15	20	18	6.7	5.2	10	2	25.15

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22423	20	16	22	6.8	5.9	10	2	23.45
22433	20	20	22	6.8	5.9	10	2	26.80
22444	25	25	28	6.8	5.9	10	2	36.85



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Sealings

Geberit Mapress Copper cap (FKM, blue)



click & scan

Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
52752	12	15	2.3	0.3	5	7.59
52753	15	18	2.3	0.3	5	9.47
52754	20	22	2.5	0.4	5	12.50
52755	25	28	2.7	0.4	5	17.71
52756	32	35	3	0.4	5	21.17
52757	40	42	3.4	0.4	5	32.38
52758	50	54	3.9	0.4	5	43.67

Accessories for Geberit Mapress Copper

Pipe fastenings

Geberit double nipple M10 / G 1/2"



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.79

Geberit threaded rod



click & scan

Application purposes


- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

Characteristics

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	16.76

Geberit threaded pipe



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	115	2	1	36.07

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.50

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	4.04

System seals

Geberit Mapress seal ring, CIIR, black



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.46
90402	12	15	50	10		0.46
90403	15	18	50	10		0.59
90404	20	22	50	10		0.59
90405	25	28	50	10		0.64
90406	32	35	50	10		0.64
90407	40	42		10		0.94
90408	50	54		10		0.94

Geberit Mapress seal ring, EPDM, black



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For Geberit Mapress Copper pressing sockets
- Application overview – Geberit Mapress Copper → p. 167

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	EPDM

Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
90465	65	66.7	1	1.53
90466	65	76.1	1	2.13
90467	80	88.9	1	2.73
90468	100	108	1	5.22

Geberit Mapress seal ring, FKM, blue



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data


Operating temperature	-25 – +140 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.72
90882	12	15	100	10	1.15
90883	15	18	100	10	1.39
90884	20	22	100	10	1.66
90885	25	28	100	10	1.96
90886	32	35	100	10	2.28
90887	40	42	100	10	4.18
90888	50	54	100	10	5.85



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C

Geberit Mapress flat gasket, EPDM, black



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221


Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da, ø [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.33
90081	3/4	24	13	2	50	10	0.33
90082	1	30	19.6	2		10	0.33
90083	1 1/4	39	25.6	2		10	0.53
90084	1 1/2	45	32	2		10	0.72
90085	1 3/4	50	39	2		10	0.85
90086	2 3/8	66	51	3		10	1.76
90220	N	2 1/2	72	3		10	4.02
90079	N	2 3/4	78	3		10	4.10
90088	3	84.7	76	3		10	2.66
90089	3 1/2	97	84	3		10	3.14

N: New, available as of January 2025

Geberit Mapress flat gasket, FPM, green

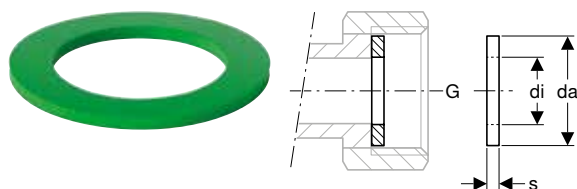

click & scan

Application purposes

- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +140 °C
Product material	FPM

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.87
90094	1	30	19.6	2	10	3.32
90095	1 1/4	39	25.6	2	10	1.43
90096	1 1/2	45	32	2	10	1.76
90097	1 3/4	50	39	2	10	2.49
90098	2 3/8	66	51	2	10	4.55



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C

Geberit Mapress flat gasket fibre composite material



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.079.00.1	1/2	18.4	10	2	5	1.22
600.080.00.1	3/4	23.9	13	2	5	1.45
600.081.00.1	1	30	19.6	2	5	1.60
600.082.00.1	1 1/8	34.7	21	2	5	1.70
600.083.00.1	1 1/4	38	25	2	5	1.94
600.084.00.1	1 1/4	38.7	25.6	2	5	1.94
600.085.00.1	1 1/2	44.6	32	2	5	2.10
600.087.00.1	1 3/4	50.5	39	2	5	2.30
600.088.00.1	2	56.4	42	2	5	2.42
600.089.00.1	2 1/4	62.5	42	2	5	2.54
600.090.00.1	2 3/8	66.2	51	2	5	2.90
600.091.00.1	2 1/2	72	54	2	5	3.27
600.092.00.1	2 3/4	78.3	57	2	5	3.63
600.093.00.1	3	84.7	72.1	2	5	3.99
600.094.00.1	3 1/2	97.1	84.9	2	5	4.36

Geberit flange gasket, fibre composite material PN 6



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, ø [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
600.051.00.1	15	44	20	2	6	1	1.81
600.052.00.1	20	54	25	2	6	1	2.03
600.053.00.1	25	64	30	2	6	1	2.42
600.054.00.1	32	76	38	2	6	1	2.87
600.055.00.1	40	86	45	2	6	1	3.43
600.056.00.1	50	96	57	2	6	1	4.06
600.057.00.1	65	116	76	2	6	1	5.10
600.058.00.1	80	132	89	2	6	1	6.12
600.059.00.1	100	152	108	2	6	1	7.32

Geberit flange gasket, fibre composite material PN 10/16



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)


Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, ø [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
600.041.00.1	15	50	20	2	10 / 16		1	2.06
600.042.00.1	20	60	25	2	10 / 16	5	1	2.30
600.043.00.1	25	70	30	2	10 / 16	5	1	2.73
600.044.00.1	32	82	38	2	10 / 16	5	1	3.24
600.045.00.1	40	92	45	2	10 / 16	5	1	3.87
600.046.00.1	50	107	57	2	10 / 16	5	1	4.59
600.047.00.1	65	127	76	2	10 / 16	5	1	5.75
600.048.00.1	80	142	89	2	10 / 16	5	1	6.91
600.049.00.1	100	162	108	2	10 / 16	5	1	8.29

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



click & scan

Application purposes

- For flanges made of stainless steel, gunmetal and brass

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Characteristics


- Steel type A2, strength class 70, EN ISO 3506-1

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.54
91165	10	11	5	3.6	4	2.54
91166	12	14	5	3	4	3.17
91167	12	14	5.5	3.5	4	3.17
91168	12	14	6	4	4	2.42
91169	16	18	5.5	3.3	4	2.87
91170	16	18	6	3.8	4	2.87
91171	16	18	6.5	4.3	4	2.87
91172	16	18	7	4.8	4	2.87
91173	16	18	8	5.8	4	2.87

Geberit bolt set for flange connection, made of zinc-plated steel



click & scan

Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	2.56
91065	10	11	5	3.6	4	2.56
91066	12	14	5	3	4	2.56
91067	12	14	5.5	3.5	4	2.56
91068	12	14	6	4	4	2.56
91069	16	18	5.5	3.3	4	2.56
91070	16	18	6	3.8	4	2.56
91071	16	18	6.5	4.3	4	2.56
91072	16	18	7	4.8	4	2.56
91073	16	18	8	5.8	4	2.56



Geberit Mapress CuNiFe

Preliminary remarks	221
Application overview – Geberit Mapress CuNiFe.....	223
Geberit Mapress CuNiFe	224
System pipes 2.1972	224
Couplings	224
Reducers.....	225
Bends.....	226
T-pieces.....	228
Adaptors, permanent.....	230
Adaptors and connections, detachable.....	232
Feed-throughs	234
Accessories for Geberit Mapress CuNiFe	235
System seals.....	235
Sets of bolts for flange connections.....	239



Preliminary remarks

Introduction to Geberit Mapress CuNiFe

Geberit Mapress CuNiFe is a sea water resistant material. It is especially suited to shipbuilding and has proved itself over many years with pipelines carrying salt water in lots of installations.

The copper-nickel-iron alloy is used in shipbuilding for engine room systems, the supply of service water, pool water and heating water.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

Benefits of Geberit Mapress CuNiFe

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Clean installation using the Geberit pressing technology. No consumables required.

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Resistant to salt water

High resistance to corrosion due to the copper-nickel-iron alloy (CuNi10Fe1,6Mn)

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 8 for an in depth overview of the applications for Geberit Mapress CuNiFe.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress CuNiFe fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress CuNiFe

Geberit Great Britain, Version: December 2024

Product Data Sheet, Version: December 2021

Application purposes	Operating temperature	Maximum operating pressure	Pipes	Fittings	Seal rings		
			CuNiFe	CuNiFe black indicator	CIIR, black	FKM, blue	
Liquid media							
For cooling and heating water without antifreeze agent	0–100 °C	12 bar/1300 kPa	✓	✓	✓		
For cooling and heating water with antifreeze agent	–30 – +120 °C	12 bar/1300 kPa	✓	✓	✓ ⁴⁾		
For service water and process water	0–100 °C	12 bar/1300 kPa	3)	3)	3)		
For grey and black water with pH value > 6.0	0–100 °C	12 bar/1300 kPa	✓	✓	✓		
For seawater	0–100 °C	12 bar/1300 kPa	✓	✓	✓		
For extinguishing water (wet)	0–70 °C	12 bar/1300 kPa	✓	✓	✓		
For sprinklers (wet)	0–70 °C	12 bar/1300 kPa	✓	✓	✓		
For mineral and lubricating oil	Upon request	Upon request	3)	3)		3)	
For motor fuels (e.g. diesel)	Upon request	Upon request	3)	3)		3)	
Gaseous media							
For compressed air (purity class oil 0–3) ¹⁾	0–100 °C	10 bar /1000 kPa	✓	✓	✓		
For compressed air (oil purity class 0–X) ¹⁾	0–100 °C	10 bar /1000 kPa	✓	✓		✓	
For negative pressure ²⁾	0–40 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓	✓		
For inert gases (e.g. nitrogen)	Upon request	Upon request	3)	3)	3)		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Purity class oil according to ISO 8573-1:2010E; for details on humidity and particles see Technical Information "Geberit piping systems for compressed air installations"

²⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

³⁾ Following Geberit approval

⁴⁾ Only use approved antifreeze agents




- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

	Flat gaskets for screw connections			Flange gaskets
	EPDM, black	FPM, green	Fibre composite material	Fibre composite material
	✓		✓	✓
			✓	✓
	3)		3)	3)
	✓		✓	✓
	✓		✓	✓
	✓		✓	✓
	✓		✓	✓
		3)	3)	3)
		3)	3)	3)
			✓	✓
		✓	✓	✓
	✓		✓	✓
	3)		3)	3)

Geberit Mapress CuNiFe

System pipes 2.1972

Geberit Mapress CuNiFe system pipe

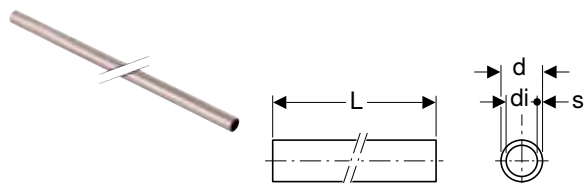

click & scan

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Seamlessly drawn
- Pipe end with black protective cap

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
Surface roughness	10 µm
Thermal expansion	0.017 mm/(m·K)
Thermal conductivity, pipe	50 W/(m·K)
Specific thermal capacity	377 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU2 [m]	GBP/m
56319	12	15	13	1	6	6	21.67
56321	20	22	20	1	6	6	39.55
56326	20	22	19	1.5	6	6	48.53
56322	25	28	25	1.5	6	6	55.56
56323	32	35	32	1.5	6	6	73.05
56324	40	42	39	1.5	6	6	89.62
56325	50	54	51	1.5	6	6	113.50
56327	65	76.1	72.1	2	6	6	195.72
56328	80	88.9	84.9	2	6	6	263.18
56329	100	108	104	2.5	6	6	394.27

Accessories

- Geberit Mapress pipe cutter R → p. 338
- Geberit Mapress pipe deburrer → p. 338
- Geberit Mapress insertion distance template with marker pen → p. 339

Couplings

Geberit Mapress CuNiFe coupling



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data


Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67002	12	15	4.8	0.8	50	10		12.09
67004	20	22	5	0.8	50	10		15.15
67005	25	28	5.4	0.8	50	10		17.16
67006	32	35	6.2	1	50	10		21.27
67007	40	42	7.1	1.1	24	4		28.94
67008	50	54	8.3	1.3	24	4		34.61
67009	65	76.1	12.7	2.1	5		1	167.46
67010	80	88.9	14.5	2.5	5		1	195.32
67011	100	108	17.6	2.6	5		1	251.14

Geberit Mapress CuNiFe slip coupling



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67102	12	15	2.5	8	3	10		20.10
67104	20	22	2.5	8.4	3.4	10		23.75
67105	25	28	3	9.1	3.1	10		27.68
67106	32	35	3	10.2	4.2	10		30.69
67107	40	42	4	12	4	4		35.73
67108	50	54	4	14	6	4		46.34
67109	65	76.1	6	23	11		1	253.94
67110	80	88.9	7	26	12		1	287.47
67111	100	108	8	31	15		1	346.06

Reducers

Geberit Mapress CuNiFe reducer with plain end



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67305	20 / 12	22	15	5.9	3.9			10		14.53
67307	25 / 12	28	15	6.6	4.6			10		16.54
67309	25 / 20	28	22	6	3.9			10		16.54
67312	32 / 20	35	22	7.1	5			10		25.70
67313	32 / 25	35	28	6.8	4.5			10		25.70
67317	40 / 25	42	28	8.3	6			4		33.12
67318	40 / 32	42	35	7.6	5			4		33.12
67323	50 / 32	54	35	10.6	8		12	4		46.79
67324	50 / 40	54	42	8.9	5.9		24	4		46.79
67337	65 / 40	76.1	42	12.7	9.7				1	150.42
67325	65 / 50	76.1	54	14.6	11.1	480	5		1	150.42
67338	80 / 50	88.9	54	16.2	12.8				1	162.12
67327	80 / 65	88.9	76.1	16	10.7				1	162.12
67346	100 / 65	108	76.1	18.4	13.1				1	170.71
67330	100 / 80	108	88.9	20.4	14.4				1	170.71

Bends

Geberit Mapress CuNiFe bend

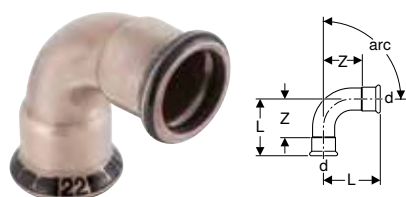

click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data


Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°									
68716	12	15	3	1			10		16.49
68718	20	22	3.3	1.2			10		22.54
68719	25	28	3.6	1.3			10		28.52
68720	32	35	3.2	0.6			10		37.93
68721	40	42	3.7	0.7			4		60.18
68722	50	54	4.4	0.9			4		79.79
68723	65	76.1	7.5	2.2				1	294.30
68724	80	88.9	8.5	2.5				1	353.16
68725	100	108	10.3	2.8				1	483.99
arc / angle: 30°									
68736	12	15	3.3	1.3			10		16.49
68738	20	22	3.7	1.6			10		22.54
68739	25	28	4.1	1.8			10		28.52
68740	32	35	3.7	1.1			10		37.93
68741	40	42	4.4	1.4			4		60.18
68742	50	54	5.2	1.7			4		79.79
68743	65	76.1	8.8	3.5		5		1	294.30
68744	80	88.9	10.1	4.1				1	353.16
68745	100	108	12.2	4.7				1	483.99
arc / angle: 45°									
67602	12	15	2.8	0.8		50	10		16.49
67604	20	22	3.2	1.1		50	10		22.54
67605	25	28	3.7	1.4		50	10		28.52
67606	32	35	4.3	1.7		50	10		37.93
67607	40	42	5.1	2.1	1200	24	4		60.18
67608	50	54	6.2	2.7	768	24	4		79.79
67609	65	76.1	10.3	5		5		1	235.50
67610	80	88.9	11.7	5.7		5		1	282.55
67611	100	108	14.3	6.8	80	5		1	419.45
arc / angle: 60°									
68804	12	15	4	2			10		16.49
68806	20	22	4.7	2.6			10		22.54
68807	25	28	5.4	3.1			10		28.52
68808	32	35	5	2.4			10		37.93
68809	40	42	5.9	2.9			4		60.18
68810	50	54	7.2	3.7			4		79.79
68811	65	76.1	11.7	6.4				1	294.30
68812	80	88.9	13.6	7.6				1	353.16
68813	100	108	16.6	9.1				1	483.99
arc / angle: 90°									
68102	12	15	3.8	1.8		50	10		16.49
68104	20	22	4.7	2.6		50	10		22.54
68105	25	28	5.7	3.4		50	10		28.52
68106	32	35	6.8	1.7		50	10		37.93
68107	40	42	8	2.1	1200	24	4		60.18
68108	50	54	6.2	2.7	384	24	4		79.79
68109	65	76.1	15.7	10.4		5		1	235.50
68110	80	88.9	18.4	12.4	80	5		1	282.55
68111	100	108	22.6	15.1	60	5		1	419.45

Geberit Mapress CuNiFe bend with plain end



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data


Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
68726	12	15	3	4	1			10		16.49
68728	20	22	3.2	4.1	1.2			10		22.54
68729	25	28	3.6	4.3	1.3			10		28.52
68730	32	35	3.2	4.1	0.6			10		37.93
68731	40	42	3.7	4.7	0.7			4		60.18
68732	50	54	4.4	5.5	0.9			4		79.79
68733	65	76.1	7.5	8.4	2.2				1	294.30
68734	80	88.9	8.5	9.5	2.5				1	353.16
68735	100	108	10.3	11.7	2.8				1	483.99
arc / angle: 30°										
68746	12	15	3.3	4.3	1.3			10		16.49
68748	20	22	3.7	4.6	1.6			10		22.54
68749	25	28	4.1	4.8	1.8			5		28.52
68750	32	35	3.7	4.6	1.1			10		37.93
68751	40	42	4.4	5.4	1.4			4		60.18
68752	50	54	5.2	6.3	1.7			4		79.79
68753	65	76.1	8.8	9.7	3.5				1	294.30
68754	80	88.9	10.1	11.1	4.1				1	353.16
68755	100	108	12.2	13.6	4.7				1	483.99
arc / angle: 45°										
67702	12	15	2.8	3.8	0.8			10		16.49
67704	20	22	3.2	4.4	1.1			10		22.54
67705	25	28	3.7	4.6	1.4			10		28.52
67706	32	35	5.3	4.3	1.7			10		37.93
67707	40	42	5.1	5.9	2.1		24	4		60.18
67708	50	54	6.2	7	2.7	960	24	4		79.79
67709	65	76.1	10.3	11.1	5		5		1	235.50
67710	80	88.9	11.7	12.8	5.7		5		1	282.55
67711	100	108	14.3	15.8	6.8				1	419.45
arc / angle: 60°										
68814	12	15	4	5	2			10		16.49
68816	20	22	4.7	5.6	2.6			10		22.54
68817	25	28	5.4	6.1	3.1			10		28.52
68818	32	35	5	5.9	2.4			10		37.93
68819	40	42	5.9	6.9	2.9			4		60.18
68820	50	54	7.2	8.3	3.7			4		79.79
68821	65	76.1	11.7	12.6	6.4				1	294.30
68822	80	88.9	13.6	14.6	7.6				1	353.16
68823	100	108	16.6	18	9.1				1	483.99
arc / angle: 90°										
68302	12	15	2.8	3.6	0.8			10		16.49
68304	20	22	3.2	3.9	1.1		50	10		22.54
68305	25	28	5.7	6.6	3.4		50	10		28.52
68306	32	35	6.8	7.7	4.2			10		37.93
68307	40	42	8	8.8	5		24	4		60.18
68308	50	54	6.2	7	2.7	768	24	4		79.79
68309	65	76.1	15.9	16.7	10.6		5		1	235.50
68310	80	88.9	18.5	19.5	12.5				1	282.55
68311	100	108	23	24.1	15.5				1	419.45

Geberit Mapress CuNiFe bend with plain ends 90°


[click & scan](#)

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 221


Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	H [cm]	H1 [cm]	K [cm]	K1 max. [cm]	SU2 [pc.]	GBP/pc.
67402	12	15	90	5.9	12.9	0	7	10	18.09
67404	20	22	90	7	14.2	0	7.2	5	19.27
67405	25	28	90	7.9	15.5	0	7.6	10	20.42
67406	32	35	90	7.7	15.4	0	7.7	10	42.14
67407	40	42	90	9	18	0	9	4	56.79
67408	50	54	90	11.1	20.5	0	9.4	4	71.44

T-pieces

Geberit Mapress CuNiFe T-piece, equal

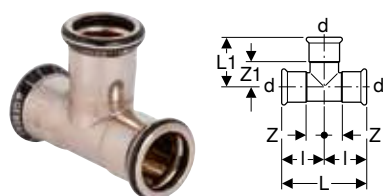
[click & scan](#)

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
68002	12	15	90	6.4	4	3.2	1.2	2	10		27.66
68004	20	22	90	7.4	4.5	3.7	1.6	2.4	10		31.36
68005	25	28	90	8.4	5.1	4.2	1.9	2.8	10		38.04
68006	32	35	90	10	5.9	5	2.4	3.3	10		47.38
68007	40	42	90	11.4	6.6	5.7	2.7	3.6	4		68.50
68008	50	54	90	13.8	7.2	6.9	3.4	3.7	4		79.37
68009	65	76.1	90	23	11	11.5	6.2	5.7		1	415.16
68010	80	88.9	90	26	12.7	13	7	6.7		1	452.89
68011	100	108	90	31	15.3	15.5	8	7.8		1	528.02

Geberit Mapress CuNiFe T-piece, reduced

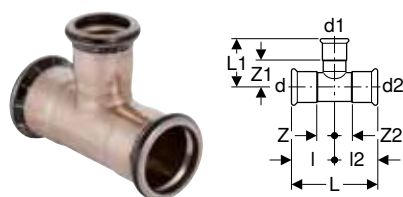
[click & scan](#)

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67206	20 / 12 / 20	22	15	22	90	7.4	4.4	3.7	3.7	1.6	2.4	1.6	10		31.36
67209	25 / 12 / 25	28	15	28	90	8.4	4.7	4.2	4.2	1.9	2.7	1.9	10		38.04
67211	25 / 20 / 25	28	22	28	90	8.4	4.8	4.2	4.2	1.9	2.7	1.9	10		38.04
67212	32 / 12 / 32	35	15	35	90	10	4.9	5	5	2.4	2.9	2.4	10		49.97
67214	32 / 20 / 32	35	22	35	90	10	5.2	5	5	2.4	2.1	2.4	10		47.38
67215	32 / 25 / 32	35	28	35	90	10	5.5	5	5	2.4	3.2	2.4	10		47.38
67218	40 / 20 / 40	42	22	42	90	11.4	5.4	5.7	5.7	2.7	3.3	2.7	4		68.50
67219	40 / 25 / 40	42	28	42	90	11.4	5.8	5.7	5.7	2.7	3.5	2.7	4		68.50
67220	40 / 32 / 40	42	35	42	90	11.4	6.2	5.7	5.7	2.7	3.6	2.7	4		68.50
67227	50 / 20 / 50	54	22	54	90	13.8	6.1	6.9	6.9	3.4	4	3.4	4		79.37
67228	50 / 25 / 50	54	28	54	90	13.8	6.4	6.9	6.9	3.4	4.1	3.4	4		79.37
67225	50 / 32 / 50	54	35	54	90	13.8	6.8	6.9	6.9	3.4	4.2	3.4	4		79.37
67226	50 / 40 / 50	54	42	54	90	13.8	7.2	6.9	6.9	3.4	4.2	3.4	4		79.37
67229	65 / 20 / 65	76.1	22	76.1	90	23	7.2	11.5	11.5	6.2	5.1	6.2		1	410.99
67230	65 / 25 / 65	76.1	28	76.1	90	23	7.5	11.5	11.5	6.2	5.2	6.2		1	410.99
67231	65 / 32 / 65	76.1	35	76.1	90	23	7.9	11.5	11.5	6.2	5.3	6.2		1	410.99
67252	65 / 40 / 65	76.1	42	76.1	90	23	8.3	11.5	11.5	6.2	5.3	6.2		1	410.99
67253	65 / 50 / 65	76.1	54	76.1	90	23	8.9	11.5	11.5	6.2	5.4	6.2		1	410.99
67233	80 / 20 / 80	88.9	22	88.9	90	26	7.8	13	13	7	5.7	7		1	428.10
67250	80 / 25 / 80	88.9	28	88.9	90	26	8.1	13	13	7	5.8	7		1	428.10
67251	80 / 32 / 80	88.9	35	88.9	90	26	8.5	13	13	7	5.9	7		1	428.10
67239	80 / 40 / 80	88.9	42	88.9	90	26	8.9	13	13	7	5.9	7		1	428.10
67260	80 / 50 / 80	88.9	54	88.9	90	26	9.5	13	13	7	6	7		1	428.10
67261	80 / 65 / 80	88.9	76.1	88.9	90	26	11.6	13	13	7	6.3	7		1	428.10
67244	100 / 20 / 100	108	22	108	90	31	8.8	15.5	15.5	8	6.7	8		1	528.02
67245	100 / 25 / 100	108	28	108	90	31	9.1	15.5	15.5	8	6.8	8		1	528.02
67246	100 / 32 / 100	108	35	108	90	31	9.5	15.5	15.5	8	6.9	8		1	528.02
67247	100 / 40 / 100	108	42	108	90	31	9.9	15.5	15.5	8	6.9	8		1	528.02
67248	100 / 50 / 100	108	54	108	90	31	10.5	15.5	15.5	8	7	8		1	528.02
67269	100 / 65 / 100	108	76.1	108	90	31	12.6	15.5	15.5	8	7.3	8		1	528.02
67270	100 / 80 / 100	108	88.9	108	90	31	13.7	15.5	15.5	8	7.7	8		1	528.02

Geberit Mapress CuNiFe T-piece with female thread



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67344	12 / 15 / 12	15	1/2	15	90	6.4	3.7	3.2	3.2	0.8	2.4	0.8	10		28.76
67347	20 / 15 / 20	22	1/2	22	90	7.4	4.1	3.7	3.7	1.6	2.8	1.6	10		39.57
67348	20	22	3/4	22	90	7.4	4.6	3.7	3.7	1.6	3.1	1.6	10		39.57
67349	25 / 15 / 25	28	1/2	28	90	8.4	4.4	4.2	4.2	1.9	3.1	1.9	10		44.20
67350	25 / 20 / 25	28	3/4	28	90	8.4	4.6	4.2	4.2	1.9	3.1	1.9	10		44.20
67352	32 / 15 / 32	35	1/2	35	90	10	4.8	5	5	2.4	3.5	2.4		1	53.60
67353	32 / 20 / 32	35	3/4	35	90	10	5.3	5	5	2.4	4	2.4		1	53.60
67356	40 / 15 / 40	42	1/2	42	90	11.4	5.1	5.7	5.7	2.7	3.8	2.7		1	65.39
67357	40 / 20 / 40	42	3/4	42	90	11.4	5.6	5.7	5.7	2.7	4.3	2.7		1	65.39
67360	50 / 15 / 50	54	1/2	54	90	13.8	5.7	6.9	6.9	3.4	4.4	3.4		1	78.22
67361	50 / 20 / 50	54	3/4	54	90	13.8	6.2	6.9	6.9	3.4	4.9	3.4		1	78.22
67366	65 / 20 / 65	76.1	3/4	76.1	90	23	7	11.5	11.5	6.2	5.5	6.2		1	366.00
67369	80 / 20 / 80	88.9	3/4	88.9	90	26	7.6	13	13	7	6.1	7		1	397.67
67373	100 / 20 / 100	108	3/4	108	90	31	8.6	15.5	15.5	8	7.1	8		1	478.75

Adaptors, permanent

Geberit Mapress CuNiFe adaptor with male thread


[click & scan](#)

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
68703	12 / 15	15	1/2	5.3	3.3	50	10	31.49
68715	20 / 15	22	1/2	5.4	3.3		10	35.67
68707	20	22	3/4	5.8	3.7		10	35.67
68708	25	28	1	6.4	4.1		10	54.52
68709	32	35	1 1/4	7.2	4.6		10	62.91
68710	40	42	1 1/2	7.7	4.7		4	92.23
68711	50	54	2	8.9	5.4		4	129.99



- Adaptors with NPT thread on demand

Geberit Mapress CuNiFe adaptor with male thread NPT


[click & scan](#)

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- NPT pipe thread according to ASME/ANSI B1.20.1
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	NPT ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
68833	12 / 15	15	1/2	6.1	4.1	10	37.75
68837	20	22	3/4	6.3	4.2	10	50.35
68838	25	28	1	7.2	4.9	10	71.29
68839	32	35	1 1/4	7.8	5.2	10	113.20
68840	40	42	1 1/2	8.3	5.3	4	155.17
68841	50	54	2	9	5.5	4	230.62

Geberit Mapress CuNiFe adaptor with female thread


[click & scan](#)

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
67802	12 / 15	15	1/2	5.5	2.2	10	31.49
67805	20 / 15	22	1/2	5.6	2.2	10	35.67

Art. no.	DN	d, Ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
67806	20	22	3/4	5.8	2.2	10	35.67
67809	25	28	1	6.4	2.4	10	54.52
67811	32	35	1 1/4	7	2.5	10	62.91
67814	40	42	1 1/2	7.4	2.5	4	92.23
67818	50	54	2	8.9	3.1	4	129.99

Geberit Mapress CuNiFe bend adaptor 90° with male thread



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, Ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
67515	12 / 15	15	1/2	90	3.8	7.5	1.8	10	37.93
67516	20 / 15	22	1/2	90	4.7	8.4	2.6	10	48.85
67517	20	22	3/4	90	4.7	8.6	2.6	10	48.85
67518	25	28	1	90	5.7	9.7	3.4	10	57.79
67519	32	35	1 1/4	90	6.8	11.2	4.2	10	82.15
67520	40	42	1 1/2	90	8	12.4	5	4	133.41
67521	50	54	2	90	10	14.4	6.5	4	170.05



Geberit Mapress CuNiFe bend adaptor 90° with female thread



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, Ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	GBP/pc.
67503	12 / 15	15	1/2	90	3.8	7.7	1.8	6.4	10	37.93
67506	20 / 15	22	1/2	90	4.7	8.4	2.6	7.3	10	48.85
67507	20	22	3/4	90	4.7	8.6	2.6	7.1	10	48.85
67508	25	28	1	90	5.7	9.7	4	7.8	10	57.79
67509	32	35	1 1/4	90	6.8	11	4.2	9.1	10	82.15
67510	40	42	1 1/2	90	8	12.1	5	10.4	4	133.41
67511	50	54	2	90	10	15	6.5	13	4	170.05

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 100

Adaptors and connections, detachable

Geberit Mapress CuNiFe adaptor union with male thread



click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
67232	12 / 15	15	1/2	3/4	8.1	6.1	10	52.49
67234	20 / 15	22	1/2	1	8.4	6.3	10	61.24
67243	20	22	3/4	1	8.5	6.4	10	61.24
67235	25	28	1	1 1/4	9.6	7.3	10	96.20
67236	32	35	1 1/4	1 1/2	10.4	7.8	10	122.47
67237	40	42	1 1/2	1 3/4	10.9	7.9	4	141.96
67238	50	54	2	2 3/8	12.4	8.9	4	244.56

Geberit Mapress CuNiFe flange PN 6, with pressing socket

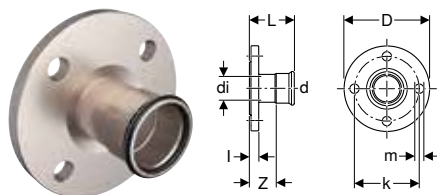

click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-3

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
68682	15 / 12	15	14.1	8	55	11	5.9	1	3.9	4	6		1	117.86
68684	20	22	19	9	65	11	6.3	1	4.2	4	6		1	145.00
68685	25	28	25.2	10	75	11	6.7	1	4.4	4	6		1	161.01
68686	32	35	32	12	90	14	6.8	1	4.2	4	6		1	197.01
68687	40	42	39	13	100	14	7.7	1.2	4.7	4	6		1	246.11
68688	50	54	51	14	110	14	8.5	1.4	5	4	6		1	280.55
68689	65	76.1	71.9	16	130	14	11.8	1.6	6.5	4	6	75	1	337.11
68690	80	88.9	84.7	19	150	18	12.3	1.6	6.3	4	6	75	1	431.71
68691	100	108	103.8	21	170	18	12.8	1.8	5.3	4	6		1	517.81

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 6 → p. 104

Geberit Mapress CuNiFe flange PN 10/16, with pressing socket

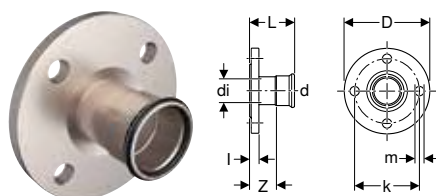

click & scan

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-3

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
68692	15 / 12	15	14.1	9.5	65	14	6.1	1.2	4.1	4	10 / 16		1	144.05
68694	20	22	19	10.5	75	14	6.5	1.2	4.4	4	10 / 16		1	176.76
68695	25	28	25.2	11.5	85	14	6.9	1.2	4.6	4	10 / 16		1	197.27
68696	32	35	32	14	100	18	7.2	1.4	4.6	4	10 / 16		1	263.45
68697	40	42	39	15	110	18	7.9	1.4	4.9	4	10 / 16		1	305.28
68698	50	54	51	16.5	125	18	8.7	1.6	5.2	4	10 / 16		1	375.13
68699	65	76.1	71.9	18.5	145	18	11.8	1.6	6.5	4	10 / 16	75	1	426.27
68700	80	88.9	84.7	20	160	18	12.5	1.8	6.5	8	10 / 16	75	1	555.18
68701	100	108	103.8	22	180	18	13	2	5.5	8	10 / 16		1	648.57

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 105
- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Geberit Mapress CuNiFe flanged stub with plain end, for loose flange PN 6

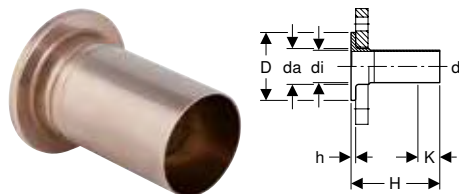

click & scan

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
68756	20	22	27	19	5	13.5	0.6	3.9	6	1	126.31
68757	25	28	32	25	6	13.5	0.6	3.7	6	1	143.41
68758	32	35	40	32	7	13.5	0.6	2.7	6	1	151.98
68759	40	42	47	39	8	13.5	0.6	0	6	1	196.18
68760	50	54	59	51	9	13.5	0.8	0	6	1	232.04
68761	65	76.1	78	72.1	11	13.5	0.8	0	6	1	261.98
68762	80	88.9	91	84.9	12.8	13.5	1	0	6	1	302.75
68763	100	108	110	104	14.8	13.5	1	0	6	1	361.69


To order additionally

- Loose flange

Accessories

- Geberit flange gasket, fibre composite material PN 6 → p. 104

Geberit Mapress CuNiFe flanged stub with plain end, for loose flange PN 10/16



click & scan

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	da, ø [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
68791	20	22	27	19	5.8	13.5	0.6	3.5	10 / 16	1	118.38
68793	25	28	32	25	6.8	13.5	0.6	3.7	10 / 16	1	143.74
68794	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16	1	192.28
68795	40	42	47	39	8.8	13.5	0.6	0	10 / 16	1	224.33
68796	50	54	59	51	10.2	13.5	0.8	0	10 / 16	1	279.31
68797	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	1	441.66
68798	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	1	523.44
68799	100	108	110	104	15.8	13.5	1	0	10 / 16	1	619.55

To order additionally

- Loose flange

Accessories


- Geberit flange gasket, fibre composite material PN 10/16 → p. 104

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Feed-throughs

Geberit Mapress CuNiFe bulkhead and deck passing with two plain ends



click & scan

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	l [cm]	SU1 [pc.]	GBP/pc.
92080	12	15	2.5	45	16.5	1	107.33
92082	20	22	3.4	45	16.5	1	114.66
92083	25	28	3.8	45	16.5	1	126.83
92084	32	35	4.5	45	16.5	1	153.67
92085	40	42	5.4	45	16.5	1	174.49
92086	50	54	7	45	16.5	1	202.46
92087	65	76.1	8.9	45	16.5	1	456.16
92088	80	88.9	10.8	45	16.5	1	509.82
92089	100	108	13.3	45	16.5	1	563.46

Characteristics

- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Accessories for Geberit Mapress CuNiFe

System seals

Geberit Mapress seal ring, CIIR, black



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.46
90402	12	15	50	10		0.46
90403	15	18	50	10		0.59
90404	20	22	50	10		0.59
90405	25	28	50	10		0.64
90406	32	35	50	10		0.64
90407	40	42		10		0.94
90408	50	54		10		0.94
90409	65	76.1			1	2.60
90410	80	88.9			1	3.54
90411	100	108			1	6.87



CuNiFe

Geberit Mapress seal ring, FKM, blue



click & scan

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data


Operating temperature	-25 – +140 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.72
90882	12	15	100	10	1.15
90883	15	18	100	10	1.39
90884	20	22	100	10	1.66
90885	25	28	100	10	1.96
90886	32	35	100	10	2.28
90887	40	42	100	10	4.18
90888	50	54	100	10	5.85
90891	65	76.1	50	5	17.26
90892	80	88.9	50	5	21.47
90893	100	108	25	5	47.87



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C

Geberit Mapress flat gasket, EPDM, black



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221


Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da, ø [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.33
90081	3/4	24	13	2	50	10	0.33
90082	1	30	19.6	2		10	0.33
90083	1 1/4	39	25.6	2		10	0.53
90084	1 1/2	45	32	2		10	0.72
90085	1 3/4	50	39	2		10	0.85
90086	2 3/8	66	51	3		10	1.76
90220	N 2 1/2	72	54	3		10	4.02
90079	N 2 3/4	78	57	3		10	4.10
90088	3	84.7	76	3		10	2.66
90089	3 1/2	97	84	3		10	3.14

N: New, available as of January 2025

Geberit Mapress flat gasket, FPM, green

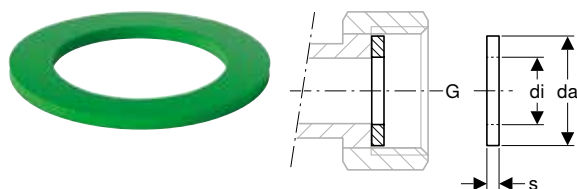

click & scan

Application purposes

- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +140 °C
Product material	FPM

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.87
90094	1	30	19.6	2	10	3.32
90095	1 1/4	39	25.6	2	10	1.43
90096	1 1/2	45	32	2	10	1.76
90097	1 3/4	50	39	2	10	2.49
90098	2 3/8	66	51	2	10	4.55



- For use in thermal media (solar): Service life with collector standstill: 200 h/a at 180 °C, 60 h/a at 200 °C, total service life: 500 h at 220 °C



Geberit Mapress flat gasket fibre composite material



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	G ["]	da, Ø [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.079.00.1	1/2	18.4	10	2	5	1.22
600.080.00.1	3/4	23.9	13	2	5	1.45
600.081.00.1	1	30	19.6	2	5	1.60
600.082.00.1	1 1/8	34.7	21	2	5	1.70
600.083.00.1	1 1/4	38	25	2	5	1.94
600.084.00.1	1 1/4	38.7	25.6	2	5	1.94
600.085.00.1	1 1/2	44.6	32	2	5	2.10
600.087.00.1	1 3/4	50.5	39	2	5	2.30
600.088.00.1	2	56.4	42	2	5	2.42
600.089.00.1	2 1/4	62.5	42	2	5	2.54
600.090.00.1	2 3/8	66.2	51	2	5	2.90
600.091.00.1	2 1/2	72	54	2	5	3.27
600.092.00.1	2 3/4	78.3	57	2	5	3.63
600.093.00.1	3	84.7	72.1	2	5	3.99
600.094.00.1	3 1/2	97.1	84.9	2	5	4.36

Geberit flange gasket, fibre composite material PN 6



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, Ø [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
600.051.00.1	15	44	20	2	6	1	1.81
600.052.00.1	20	54	25	2	6	1	2.03
600.053.00.1	25	64	30	2	6	1	2.42
600.054.00.1	32	76	38	2	6	1	2.87
600.055.00.1	40	86	45	2	6	1	3.43
600.056.00.1	50	96	57	2	6	1	4.06
600.057.00.1	65	116	76	2	6	1	5.10
600.058.00.1	80	132	89	2	6	1	6.12
600.059.00.1	100	152	108	2	6	1	7.32

Geberit flange gasket, fibre composite material PN 10/16



click & scan

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)


Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, Ø [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
600.041.00.1	15	50	20	2	10 / 16		1	2.06
600.042.00.1	20	60	25	2	10 / 16	5	1	2.30
600.043.00.1	25	70	30	2	10 / 16	5	1	2.73
600.044.00.1	32	82	38	2	10 / 16	5	1	3.24
600.045.00.1	40	92	45	2	10 / 16	5	1	3.87
600.046.00.1	50	107	57	2	10 / 16	5	1	4.59
600.047.00.1	65	127	76	2	10 / 16	5	1	5.75
600.048.00.1	80	142	89	2	10 / 16	5	1	6.91
600.049.00.1	100	162	108	2	10 / 16	5	1	8.29

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



[click & scan](#)

Application purposes

- For flanges made of stainless steel, gunmetal and brass

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.54
91165	10	11	5	3.6	4	2.54
91166	12	14	5	3	4	3.17
91167	12	14	5.5	3.5	4	3.17
91168	12	14	6	4	4	2.42
91169	16	18	5.5	3.3	4	2.87
91170	16	18	6	3.8	4	2.87
91171	16	18	6.5	4.3	4	2.87
91172	16	18	7	4.8	4	2.87
91173	16	18	8	5.8	4	2.87



Geberit FlowFit

Preliminary Remarks.....	243
Application overview – Geberit FlowFit	245
System pipes ML.....	246
System pipes, heating, ML.....	250
Fittings.....	252
Couplings	252
Reducers.....	253
Bends	254
T-pieces.....	254
Adaptors, permanent.....	257
Adaptors and connections, detachable.....	262
Catches.....	270
Outlet mounting boxes	270
Connectors	273
Manifolds with threaded connection.....	281
Distributor with press connection	284
T-pieces for heating.....	284
Adaptors and connections for heating, detachable	285
Connections for heating.....	285
Accessories.....	291
Sealings for fittings.....	291
Cover for fittings	291
Pipe fastenings.....	292
System seals.....	294
Bolt sets for flange connections.....	295
Consumables	296



Preliminary Remarks

Introduction to Geberit FlowFit

The Geberit Flexible FlowFit pressing system with inherently stable multilayer pipes and a comprehensive range of fittings is suitable for the following uses:

- Drinking water installations
- Heating and cooling water systems
- Compressed air distribution
- Vacuum systems

Benefits of Geberit FlowFit

Geberit FlowFit is a corrosion-resistant and universally applicable supply system in which the pipes and fittings are connected by pressing them together laterally to create permanent, leakproof pipes.

Geberit FlowFit is characterised by the following properties:

- The lateral pressing combined with the innovative Geberit FlowFit tool concept enables a smooth, convenient installation with shorter installation times than with conventional pressing systems.
- The flow-optimised system with lower pressure losses enables smaller pipe diameters and therefore a smaller supply system. For potable water installations, this has a positive effect on the draw-off time and potable water hygiene.
- The Geberit system pipe ML combines the stability advantages of metallic material with the corrosion resistance of plastic. The pipes are easy to bend and inherently stable. The stability of the multilayer pipe is ensured by the longitudinally welded aluminium pipe.

Geberit provides pressing tools and service-free pressing jaws for the pressing pipes and fittings.

The lateral pressing of Geberit FlowFit enables the number of the required pressing jaws to be significantly reduced. To compress the pipe and fitting, the pressing jaw no longer has to wrap around the fitting, but is placed above the pressing indicator, which is the same size for several fitting dimensions. For lateral pressing, the space requirements for the pressing are lower. Pipes can be laid at a closer distance to the wall and ceiling and pipe systems can be installed in a more space-saving manner.

Only two pressing jaws are required for the eight Geberit FlowFit dimensions:



Blue pressing jaw for the dimensions d16, 20, 25, 32 and 40 mm and orange pressing jaw for the dimensions d50, 63 and 75mm

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact us at technical@geberit.co.uk



Application overview – Geberit FlowFit

Geberit Great Britain, Version: December 2024

Application purposes	Operating temperature	Maximum operating pressure	System pipe			
			ML	ML therm NPW	PB	
Liquid media						
For cold and hot potable water	0–70 °C ²⁾	10 bar /1000 kPa	✓		✓	
For cold potable water	0–20 °C	16 bar / 1600 kPa ⁵⁾	✓		✓	
For cooling and heating water without antifreeze agent	0–80 °C ³⁾	10 bar /1000 kPa	✓	✓		
For cooling and heating water with antifreeze agent	–10 – +40 °C ⁴⁾	10 bar /1000 kPa	✓	✓		
For service water and process water	0–70 °C	10 bar /1000 kPa	6)	6)	6)	
For treated water	0–70 °C	10 bar /1000 kPa	✓ ⁷⁾	✓ ⁷⁾	✓ ⁷⁾	
For rainwater with a pH value of > 6.0	0–70 °C	10 bar /1000 kPa	✓	✓	✓	
For seawater	0–70 °C	10 bar /1000 kPa	✓	✓		
For chemicals and technical liquids	Upon request	Upon request	6)	6)	6)	
Gaseous media						
For compressed air (oil purity class 0–3)	0–70 °C	10 bar /1000 kPa	✓	✓		
For negative pressure ¹⁾	0–70 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

²⁾ Malfunction temperature in accordance with EN 806-2: T_{mal} = 95 °C, total 100 h over the course of the service life

³⁾ Malfunction temperature in accordance with ISO 10508:2006: T_{mal} = 100 °C, total 100 h over the course of the service life

⁴⁾ Higher temperatures after Geberit approval only

⁵⁾ 10 bar / 1000 kPa for MasterFix and MeplaFix

⁶⁾ Following Geberit approval

⁷⁾ Application range according to TI "Treated Waters"

⁸⁾ pH value ≥ 7.0 permissible in combination with silicon bronze or brass

⁹⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"




- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

	Fittings					O-rings	Flat gaskets for screw connections	Flange gaskets
	Plastic	Lead-free gunmetal	Lead-free silicon bronze	Brass	Stainless steel	EPDM, black	Fibre composite material	Fibre composite material
	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓
	6)	6)	6)		6)	6)	6)	6)
	✓7)	✓7)	✓7)		✓7)	✓7)	✓7)	✓7)
	✓	✓	✓8)	✓8)	✓	✓	✓	✓
	✓	✓	✓			✓	✓	✓
	6)	6)	6)	6)	6)	6)	6)	6)
	✓	✓	✓	✓	✓	✓9)	✓	✓
	✓	✓	✓	✓	✓	✓	✓	✓



System pipes ML

Geberit system pipe, ML, in bars

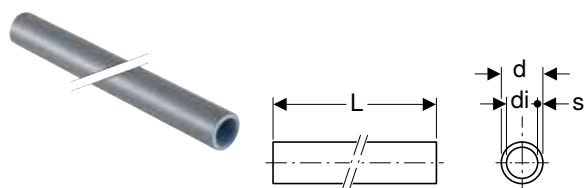

click & scan

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- Silver grey RAL 7001 exterior
- Pipe end with transparent protection plug

Technical data


Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	GBP/m
L / length: 3 m							
619.010.00.1	12	16	12	2	3240	72	3.62
619.011.00.1	15	20	16	2	2448	72	5.16
619.012.00.1	20	25	20	2.5	2016	72	8.49
619.013.00.1	25	32	26.4	2.8	1200	30	12.39
619.014.00.1	32	40	34	3	840	30	17.53
619.015.00.1	40	50	42.4	3.8	570	30	24.75
619.016.00.1	50	63	55	4	360	15	37.30
L / length: 5 m							
619.020.00.1	12	16	12	2	5400	120	3.49
619.021.00.1	15	20	16	2	4080	120	4.91
619.022.00.1	20	25	20	2.5	3360	120	8.06
619.023.00.1	25	32	26.4	2.8	2000	50	11.98
619.024.00.1	32	40	34	3	1400	50	16.69
619.025.00.1	40	50	42.4	3.8	950	50	23.64
619.026.00.1	50	63	55	4	600	25	35.62
619.027.00.1	65	75	65.8	4.6	375	25	56.48

Accessories

- Geberit pliers → p. 348
- Geberit FlowFit calibration tool → p. 349
- Geberit pipe cutter ML → p. 349
- Geberit anchor-point bracket → p. 290

Geberit system pipe, ML, in coils


[click & scan](#)

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- Silver grey RAL 7001 exterior
- Pipe end with transparent protection plug

Technical data


Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
619.050.00.1	12	16	12	2	50	500	50	3.06
619.060.00.1	12	16	12	2	120	720	120	2.92
619.070.00.1	12	16	12	2	250	1250	250	2.92
619.051.00.1	15	20	16	2	50	500	50	4.17
619.061.00.1	15	20	16	2	100	600	100	4.05
619.052.00.1	20	25	20	2.5	50	250	50	6.95
619.054.00.1	25	32	26.4	2.8	25	125	25	10.30

Accessories

- Geberit pliers → p. 348
- Geberit FlowFit calibration tool → p. 349
- Geberit pipe cutter ML → p. 349

Geberit system pipe, ML, in protective tube, in coils


[click & scan](#)

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, silver grey RAL 7001 exterior
- Ice blue protective tube
- Pipe end with transparent protection plug

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Scope of delivery


- 7 protection plugs, blue
- 7 protection plugs, red

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
619.220.00.1	12	16	12	2.7	2	50	500	50	3.76
619.221.00.1	15	20	16	3.1	2	50	300	50	5.30

Accessories

- Geberit pliers → p. 348
- Geberit FlowFit calibration tool → p. 349

Geberit system pipe, ML, with circular pre-insulation, blue, in coils



click & scan

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, silver grey RAL 7001 exterior
- Closed-cell insulation, blue protective foil
- HCFC-free and HFC-free insulation
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s1 [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
619.100.00.2	12	16	12	2.8	6	2	50	300	50	3.90
619.101.00.2	15	20	16	3.2	6	2	50	300	50	5.41
619.102.00.2	20	25	20	3.7	6	2.5	25	150	25	9.04
619.103.00.2	25	32	26.4	4.4	6	2.8	25	100	25	13.34
Insulation: 10 mm										
619.120.00.2	12	16	12	3.6	10	2	50	250	50	4.42
619.121.00.2	15	20	16	4	10	2	50	200	50	6.11
619.122.00.2	20	25	20	4.5	10	2.5	25	125	25	10.30
619.123.00.2	25	32	26.4	5.2	10	2.8	25	100	25	14.86
Insulation: 13 mm										
619.140.00.2	12	16	12	4.2	13	2	50	200	50	5.41
619.141.00.2	15	20	16	4.6	13	2	50	200	50	7.34
619.142.00.2	20	25	20	5.1	13	2.5	25	100	25	12.39
619.143.00.2	25	32	26.4	5.8	13	2.8	25	100	25	18.03
Insulation: 19 mm										
619.145.00.2 N	12	16	12	5.4	19	2	25	100	25	6.13
619.146.00.2 N	15	20	16	5.8	19	2	25	100	25	8.33
619.147.00.2 N	20	25	20	6.3	19	2.5	25	100	25	13.89
619.148.00.2 N	25	32	26.4	7	19	2.8	15	60	15	24.07
Insulation: 26 mm										
619.160.00.2	12	16	12	6.8	26	2	25	100	25	6.11
619.161.00.2	15	20	16	7.2	26	2	20	80	20	8.38
619.162.00.2	20	25	20	7.7	26	2.5	15	60	15	13.91

N: New, available as of April 2025

Accessories

- Geberit pliers → p. 348
- Geberit pipe cutter ML → p. 349
- Geberit FlowFit calibration tool → p. 349

Geberit system pipe, ML, with circular pre-insulation, red, in coils


[click & scan](#)

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, silver grey RAL 7001 exterior
- Closed-cell insulation, red protective foil
- HCFC-free and HFC-free insulation
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Art. no.		DN	d, ø [mm]	di, ø [mm]	D [cm]	s1 [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm											
619.110.00.1	PO	12	16	12	2.8	6	2	50	300	50	3.90
619.110.00.2	N	12	16	12	2.8	6	2	50	300	50	4.12
619.111.00.1	PO	15	20	16	3.2	6	2	50	300	50	5.41
619.111.00.2	N	15	20	16	3.2	6	2	50	300	50	5.72
619.112.00.1	PO	20	25	20	3.7	6	2.5	25	150	25	9.04
619.112.00.2	N	20	25	20	3.7	6	2.5	25	150	25	9.51

N: New, available as of April 2025; PO: Phase out as of July 2025

Accessories

- Geberit pliers → p. 348
- Geberit FlowFit calibration tool → p. 349




- Replacement for art. no. 619.110.00.1, 619.111.00.1, 619.112.00.1



System pipes, heating, ML

Geberit system pipe, ML, Therm, in coils



click & scan

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Characteristics


- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- White exterior
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
619.130.00.1	12	16	12	2	120	720	120	2.33
619.131.00.1	12	16	12	2	250	1250	250	1.90
619.133.00.1	15	20	16	2	100	600	100	3.01
619.135.00.2	20	25	20	2.5	50	250	50	5.55

Accessories

- Geberit pliers → p. 348
- Geberit pipe cutter ML → p. 349
- Geberit FlowFit calibration tool → p. 349

Geberit system pipe, ML, Therm, with circular pre-insulation, in coils



click & scan

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, white exterior
- Closed-cell insulation, red protective foil
- HCFC-free and HFC-free insulation
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Art. no.		DN	d, ø [mm]	di, ø [mm]	D [cm]	s1 [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm											
619.150.00.1	PO	12	16	12	2.8	6	2	50	300	50	3.15
619.150.00.2	N	12	16	12	2.8	6	2	50	300	50	3.31
619.151.00.1	PO	15	20	16	3.2	6	2	50	300	50	4.33
619.151.00.2	N	15	20	16	3.2	6	2	50	300	50	4.56
619.152.00.1	PO	20	25	20	3.7	6	2.5	25	150	25	7.25
619.152.00.2	N	20	25	20	3.7	6	2.5	25	150	25	7.64

N: New, available as of April 2025; PO: Phase out as of July 2025

Art. no.		DN	d, ø [mm]	di, ø [mm]	D [cm]	s1 [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 10 mm											
619.170.00.1	PO	12	16	12	3.6	10	2	50	250	50	3.53
619.170.00.2	N	12	16	12	3.6	10	2	50	250	50	3.70
619.171.00.1	PO	15	20	16	4	10	2	50	200	50	4.91
619.171.00.2	N	15	20	16	4	10	2	50	200	50	5.16
619.172.00.1	PO	20	25	20	4.5	10	2.5	25	125	25	9.87
619.172.00.2	N	20	25	20	4.5	10	2.5	25	125	25	10.42

N: New, available as of April 2025; PO: Phase out as of July 2025

Accessories


- Geberit pliers → p. 348
- Geberit pipe cutter ML → p. 349
- Geberit FlowFit calibration tool → p. 349



- Replacement for art. no. 619.150.00.1, 619.151.00.1, 619.152.00.1, 619.170.00.1, 619.171.00.1, 619.172.00.1

New

Geberit system pipe, ML, Therm, with eccentric pre-insulation, in coils



click & scan

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, white exterior
- Closed-cell insulation, grey protective foil
- HCFC-free and HFC-free insulation
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug



Art. no.		DN	d, ø [mm]	Insulation [mm]	di, ø [mm]	s1 [mm]	s [mm]	L [m]	B [cm]	H [cm]	SU4 [m]	SU2 [m]	GBP/m
619.180.00.2		12	16	13	12	6 / 13	2	50	3.9	3.9	200	50	5.72
619.181.00.2		15	20	13	16	6 / 13	2	50	4.3	4.3	200	50	7.73
619.182.00.2		20	25	13	20	6 / 13	2.5	25	4.9	4.9	100	25	13.03

Available as of April 2025

Accessories

- Geberit pliers → p. 348
- Geberit pipe cutter ML → p. 349
- Geberit FlowFit calibration tool → p. 349




- Replacement for art. no. 619.180.00.1, 619.181.00.1, 619.182.00.1

Fittings

Couplings

Geberit FlowFit coupling



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Characteristics


- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.010.00.1	12	16	7.7	1.2	150	10		4.17
620.011.00.1	15	20	7.7	1.2	130	10		4.91
620.012.00.1	20	25	7.7	1.2	100	10		7.22
620.013.00.1	25	32	8.7	1.5	50	10		10.30
620.014.00.1	32	40	8.7	1.5	40	5		15.85
620.015.00.1	40	50	14.1	2.2	15	5		24.46
620.016.00.1	50	63	15.1	2.4	10		1	45.59
620.017.00.1	65	75	15.1	2.4	5		1	83.48

Geberit FlowFit long coupling



click & scan

Application purposes

- For creating additional connections in existing pipelines
- For connecting prefabricated pipe sections with length compensation
- For technical building systems, industry and shipbuilding
- For repairing damaged Geberit system pipes ML
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap


Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.020.00.1	12	16	20	13.5	25	1	81.80
620.021.00.1	15	20	20	13.5	25	1	117.27
620.022.00.1	20	25	20	13.5	25	1	152.69
620.023.00.1	25	32	22.2	15	10	1	190.85
620.024.00.1	32	40	23.5	16.3	10	1	259.06
620.025.00.1	40	50	34	22	5	1	354.45

Reducers

Geberit FlowFit reducer


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	PPSU
------------------	------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Concentric
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.031.00.1	15 / 12	20	16	8.4	1.9	130	10		4.91
620.032.00.1	20 / 12	25	16	8.4	1.9	100	10		7.22
620.042.00.1	20 / 15	25	20	8.4	1.9	100	10		7.22
620.003.00.1	25 / 12	32	16	8.9	2	50	10		10.54
620.033.00.1	25 / 15	32	20	8.9	2	50	10		10.30
620.043.00.1	25 / 20	32	25	8.9	2	50	10		10.30
620.034.00.1	32 / 15	40	20	9.2	2.3	30	5		15.85
620.044.00.1	32 / 20	40	25	8.9	2	30	5		15.85
620.054.00.1	32 / 25	40	32	9.4	2.1	30	5		15.85
620.035.00.1	40 / 25	50	32	12.2	2.7	20	5		24.46
620.045.00.1	40 / 32	50	40	12.2	2.7	20	5		24.46
620.036.00.1	50 / 32	63	40	12.9	3	10		1	45.59
620.046.00.1	50 / 40	63	50	15.7	3.4	10		1	45.59
620.037.00.1	65 / 32	75	40	13.6	3.7	5		1	83.48
620.047.00.1	65 / 40	75	50	15.7	3.4	5		1	83.48
620.057.00.1	65 / 50	75	63	16.2	3.5	5		1	83.48



Bends

Geberit FlowFit bend

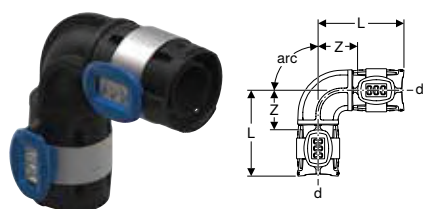

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	PPSU
------------------	------


Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
620.061.00.1	15	20	5.5	1.9	50	10		6.83
620.062.00.1	20	25	5.2	1.9	50	10		9.72
620.063.00.1	25	32	5.9	2.3	30	10		12.80
620.064.00.1	32	40	5.9	2.5	20	5		21.49
620.065.00.1	40	50	9	3	15	5		32.84
620.066.00.1	50	63	9.9	3.5	10		1	51.21
620.067.00.1	65	75	9.9	3.5	5		1	97.36
arc / angle: 90°								
620.070.00.1	12	16	5.8	2.5	120	10		5.30
620.071.00.1	15	20	6	2.7	100	10		6.68
620.072.00.1	20	25	6.2	2.9	50	10		9.72
620.073.00.1	25	32	7	3.4	40	5		12.80
620.074.00.1	32	40	7.5	3.9	30	5		21.49
620.075.00.1	40	50	11.5	5.6	15	5		32.84
620.076.00.1	50	63	12.5	6.1	10		1	51.21
620.077.00.1	65	75	13	6.7	8		1	97.36

T-pieces

Geberit FlowFit T-piece, equal

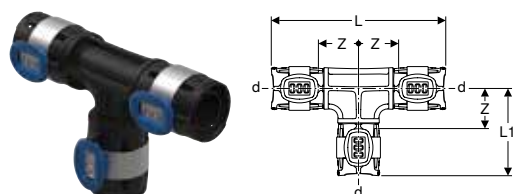

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	PPSU
------------------	------

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.080.00.1	12	16	90	11.5	5.8	2.5	70	10		7.65
620.081.00.1	15	20	90	11.9	6	2.7	50	10		8.88
620.082.00.1	20	25	90	12.4	6.2	2.9	50	10		13.34
620.083.00.1	25	32	90	14	7	3.4	30	5		19.48
620.084.00.1	32	40	90	15	7.5	3.9	20	5		27.83
620.085.00.1	40	50	90	23	11.5	5.6	5		1	45.91
620.086.00.1	50	63	90	24.9	12.5	6.1	5		1	77.02
620.087.00.1	65	75	90	26.1	13.1	6.7	4		1	155.72

Geberit FlowFit T-piece, reduced


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	PPSU
------------------	------


Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.121.00.1	12 / 15 / 12	16	20	16	90	11.9	5.8	2.7	2.5	2.7	60	10		8.88
620.101.00.1	15 / 12 / 12	20	16	16	90	11.5	6	2.4	2.7	2.5	50	10		8.88
620.111.00.1	15 / 12 / 15	20	16	20	90	11.5	6	2.5	2.7	2.5	50	10		8.88
620.131.00.1	15 / 15 / 12	20	20	16	90	11.9	6	2.7	2.7	2.7	60	10		8.88
620.132.00.1	15 / 20 / 15	20	25	20	90	12.4	6	2.9	2.7	2.9	60	10		13.34
620.100.00.1	20 / 12 / 12	25	16	16	90	11.5	6	2.4	2.7	2.5	50	10		13.65
620.108.00.1	20 / 12 / 15	25	16	20	90	11.9	6.2	2.7	2.9	2.7	50	10		13.65
620.112.00.1	20 / 12 / 20	25	16	25	90	11.5	6.2	2.5	2.9	2.5	50	10		13.34
620.102.00.1	20 / 15 / 15	25	20	20	90	11.9	6.2	2.7	2.9	2.7	50	10		13.34
620.122.00.1	20 / 15 / 20	25	20	25	90	11.9	6.2	2.7	2.9	2.7	50	10		13.34
620.142.00.1	20 / 20 / 15	25	25	20	90	12.4	6.2	2.9	2.9	2.9	50	10		13.34
620.113.00.1	25 / 12 / 25	32	16	32	90	12	6.7	2.4	3.4	2.4	30	10		19.48
620.123.00.1	25 / 15 / 20	32	20	25	90	12.2	6.7	2.7	3.4	2.7	30	10		19.48
620.133.00.1	25 / 15 / 25	32	20	32	90	12.5	6.7	2.7	3.4	2.7	40	10		19.48
620.103.00.1	25 / 20 / 20	32	25	25	90	12.7	6.7	2.9	3.4	2.9	40	10		19.48
620.143.00.1	25 / 20 / 25	32	25	32	90	13	6.7	2.9	3.4	2.9	40	5		19.48
620.104.00.1	32 / 15 / 32	40	20	40	90	12.7	7.2	2.8	3.9	2.8	20	5		27.83
620.114.00.1	32 / 20 / 32	40	25	40	90	13.2	7.1	3	3.8	3	20	5		27.83
620.124.00.1	32 / 25 / 32	40	32	40	90	14.2	7.4	3.5	3.8	3.5	20	5		27.83
620.115.00.1	40 / 20 / 40	50	25	50	90	18.9	8.3	3.5	5	3.5	5		1	45.91
620.125.00.1	40 / 25 / 40	50	32	50	90	19.9	8.6	4	5	4	5		1	45.91
620.105.00.1	40 / 32 / 32	50	40	40	90	17.9	8.7	4	5	4.4	5		1	45.91
620.135.00.1	40 / 32 / 40	50	40	50	90	20.7	8.7	4.4	5	4.4	5		1	45.91
620.106.00.1	50 / 20 / 50	63	25	63	90	19.4	9	3.4	5.7	3.4	5		1	77.02
620.116.00.1	50 / 25 / 50	63	32	63	90	20.4	9.3	3.9	5.7	3.9	5		1	77.02
620.126.00.1	50 / 32 / 50	63	40	63	90	21.2	9.4	4.3	5.8	4.3	5		1	77.02
620.136.00.1	50 / 40 / 50	63	50	63	90	23.5	12.2	5.4	6.3	5.4	5		1	77.02
620.107.00.1	65 / 20 / 65	75	25	75	90	19.4	9.6	3.4	6.3	3.4	5		1	155.72
620.117.00.1	65 / 25 / 65	75	32	75	90	20.4	9.9	3.9	6.3	3.9	5		1	155.72
620.127.00.1	65 / 32 / 65	75	40	75	90	21.2	10	4.3	6.4	4.3	5		1	155.72
620.137.00.1	65 / 40 / 65	75	50	75	90	23.5	12.8	5.4	6.9	5.4	5		1	155.72
620.147.00.1	65 / 50 / 65	75	63	75	90	24.9	13	6.1	6.7	6.1	5		1	155.72



Geberit FlowFit T-piece with female thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.150.00.1	12 / 15 / 12	16	1/2	16	90	11.9	2.4	2.7	1.1	50	10		22.81
620.151.00.1	15	20	1/2	20	90	11.9	2.4	2.7	1.1	50	10		26.72
620.157.00.1	20 / 15 / 15	25	1/2	20	90	11.9	2.6	2.7	1.3	25	5		35.62
620.152.00.1	20 / 15 / 20	25	1/2	25	90	11.9	2.6	2.7	1.3	25	5		35.62
620.162.00.1	20	25	3/4	25	90	12.8	2.8	3.1	1.5	25	5		35.62
620.153.00.1	25 / 15 / 25	32	1/2	32	90	13	3.1	2.9	1.3	25	5		46.77
620.163.00.1	25 / 20 / 25	32	3/4	32	90	13.4	3.1	3.1	1.7	25	5		46.77
620.173.00.1	25	32	1	32	90	14.4	3.1	3.6	1.6	25	5		46.77
620.154.00.1	32 / 15 / 32	40	1/2	40	90	13.4	3.4	3.1	1.9	25	5		56.73
620.164.00.1	32 / 20 / 32	40	3/4	40	90	14.7	3.5	3.8	2.1	20	5		56.73
620.174.00.1	32 / 25 / 32	40	1	40	90	14.7	4.2	3.8	2.3	20	5		56.73
620.184.00.1	32	40	1 1/4	40	90	15.4	4.4	4.1	2.3	20	5		56.73
620.155.00.1	40 / 15 / 40	50	1/2	50	90	18.5	4.1	3.3	2.4	10		1	80.10
620.185.00.1	40	50	1 1/2	50	90	22	4.6	5.1	2.3	10		1	80.10
620.165.00.1	40 / 20 / 40	50	3/4	50	90	20.2	4	4.2	2.6	10		1	80.10
620.175.00.1	40 / 25 / 40	50	1	50	90	20.2	4.6	4.2	2.5	10		1	80.10
620.156.00.1	50 / 15 / 50	63	1/2	63	90	20.5	4.6	3.9	3.1	5		1	194.67
620.166.00.1	50 / 25 / 50	63	1	63	90	22	5.1	4.7	3.2	5		1	194.67
620.176.00.1	50	63	2	63	90	24.6	6.6	6	4	5		1	194.67
620.177.00.1	65 / 25 / 65	75	1	75	90	21.6	5.4	4.5	3.5	5		1	305.92

Geberit FlowFit T-piece with lateral female thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.353.00.1	25 / 25 / 15	32	1/2	90	10.2	7.1	3.4	1.6	25	5	1	47.91
620.354.00.1	32 / 32 / 15	40	1/2	90	11.1	7.6	3.9	2	20	5	1	59.31
620.355.00.1	40 / 40 / 15	50	1/2	90	15.5	11.7	5.6	2.3	10		1	82.12

Adaptors, permanent

Geberit FlowFit adaptor to Geberit Mepla



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Suitable for use as adaptor from Geberit FlowFit to Geberit Mepla
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Pressable only with Geberit FlowFit pressing jaw
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s1 [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.090.00.1	12	16	16	2.25	7.8	1.3	10	1	7.77
620.091.00.1	15	20	20	2.5	7.8	1.3	10	1	10.01
620.092.00.1	20	25	26	3	7.8	1.3	10	1	13.91
620.093.00.1	25	32	32	3	8.8	1.6	10	1	18.93
620.094.00.1	32	40	40	3.5	8.8	1.6	10	1	22.24
620.095.00.1	40	50	50	4	14	2.1	10	1	50.07
620.096.00.1	50	63	63	4.5	15	2.3	5	1	77.86
620.097.00.1	65	75	75	4.7	15	2.3	5	1	105.67

Geberit FlowFit adaptor to Geberit Mapress, with plain end



click & scan

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01
620.232.00.1	20	25	22	7	3.7	25	5		13.91
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93
620.234.00.1	32	40	35	8	4.4	25	5		22.24
620.235.00.1	40	50	42	12.8	6.9	10		1	50.07
620.236.00.1	50	63	54	13.8	7.5	5		1	77.86

Geberit FlowFit adaptor to Geberit Mapress, with plain end, stainless steel

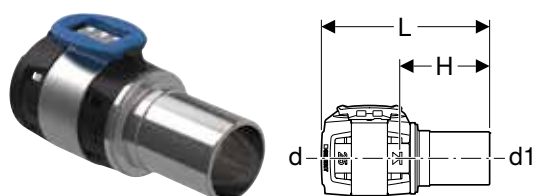

click & scan

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.250.00.1	12	16	15	7.1	3.8	10	1	18.53
620.251.00.1	15	20	18	7.1	3.8	10	1	21.81
620.252.00.1	15 / 20	20	22	7.2	3.9	10	1	21.81
620.253.00.1	20	25	22	7.2	3.9	10	1	27.24
620.254.00.1	25	32	28	7.9	4.3	10	1	35.49
620.255.00.1	32	40	35	8.2	4.6	10	1	47.99
620.256.00.1	40	50	42	12.5	6.6	5	1	81.80
620.257.00.1	50	63	54	14.2	7.9	5	1	106.37

Geberit FlowFit adaptor to Geberit Mapress, with pressing socket, stainless steel

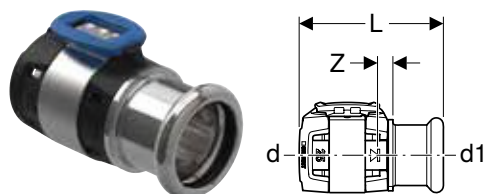

click & scan

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.329.00.1	12 / 10	16	12	5.4	0.6	10	1	18.53
620.332.00.1	12	16	15	5.6	0.6	10	1	18.53
620.347.00.1	15 / 12	20	15	5.6	0.6	10	1	21.81
620.333.00.1	15	20	18	5.6	0.6	10	1	21.81
620.334.00.1	15 / 20	20	22	5.7	0.6	10	1	21.81
620.335.00.1	20	25	22	5.7	0.6	10	1	27.24
620.336.00.1	25	32	28	6.4	0.8	10	1	35.49
620.337.00.1	32	40	35	6.7	0.8	10	1	47.99
620.338.00.1	40	50	42	9.7	1.1	5	1	81.80
620.339.00.1	50	63	54	10.7	1.2	5	1	106.37

Geberit FlowFit adaptor with male thread

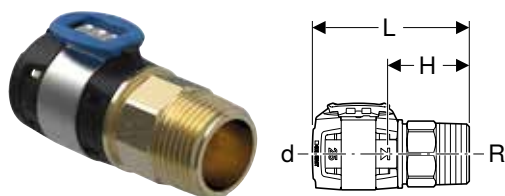

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.300.00.1	12 / 10	16	3/8	6.1	2.8	18	50	10		6.68
620.310.00.1	12 / 15	16	1/2	6.1	2.8	22	50	10		6.68
620.320.00.1	12 / 20	16	3/4	6.5	3.2	27	50	10		6.68
620.301.00.1	15 / 10	20	3/8	6.1	2.8	18	50	10		9.19
620.311.00.1	15	20	1/2	6.4	3.1	22	50	10		9.19
620.321.00.1	15 / 20	20	3/4	6.5	3.2	27	50	10		9.19
620.308.00.1	15 / 25	20	1	6.4	3.1	34	50	10		9.19
620.302.00.1	20 / 15	25	1/2	6.4	3.1	22	25	5		11.66
620.312.00.1	20	25	3/4	6.8	3.5	27	50	5		11.66
620.322.00.1	20 / 25	25	1	6.6	3.3	34	25	5		11.66
620.309.00.1	25 / 20	32	3/4	7.5	3.9	27	25	5		14.45
620.303.00.1	25	32	1	7.5	3.9	34	25	5		14.45
620.313.00.1	25 / 32	32	1 1/4	7.2	3.6	43	25	5		14.45
620.304.00.1	32 / 25	40	1	7.4	3.8	47	25	5		21.72
620.314.00.1	32	40	1 1/4	7.4	3.8	47	25	5		21.72
620.324.00.1	32 / 40	40	1 1/2	7.3	3.7	49	25	5		21.72
620.305.00.1	40	50	1 1/2	10	4.1	59	20	2		47.85
620.315.00.1	40 / 50	50	2	10.4	4.4	60	20	2		47.85
620.306.00.1	50	63	2	11	4.7	74	10	2		72.31
620.316.00.1	50 / 65	63	2 1/2	11.3	4.9	76	10	2		72.31
620.307.00.1	65	75	2 1/2	11.4	5	86	5		1	139.05

Geberit FlowFit adaptor with male thread, stainless steel

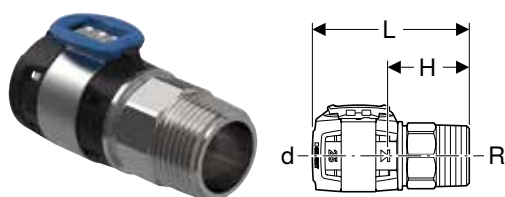

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For industry
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.700.00.1	15	20	1/2	6.4	3.1	22	25	1	79.11
619.701.00.1	20	25	3/4	6.8	3.5	27	25	1	98.13
619.702.00.1	25	32	1	7.5	3.9	34	25	1	125.44
619.703.00.1	32	40	1 1/4	7.4	3.8	47	10	1	163.58
619.704.00.1	40	50	1 1/2	10	4.1	59	10	1	212.66
619.705.00.1	50	63	2	11	4.7	74	10	1	272.65
619.706.00.1	65	75	2 1/2	11.4	5	86	5	1	354.45

Geberit FlowFit adaptor with female thread

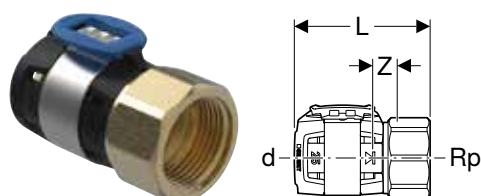

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.400.00.1	12 / 10	16	3/8	5.1	1	22	50	10		6.68
620.410.00.1	12 / 15	16	1/2	5.6	1.3	27	50	10		6.68
620.420.00.1	12 / 20	16	3/4	5.8	1.3	32	50	10		6.68
620.401.00.1	15 / 10	20	3/8	5.3	1.2	22	50	10		9.19
620.411.00.1	15	20	1/2	5.5	1.1	27	50	10		9.19
620.421.00.1	15 / 20	20	3/4	5.8	1.3	32	50	10		9.19
620.402.00.1	20	25	3/4	5.7	1.2	32	50	5		13.91
620.412.00.1	20 / 25	25	1	6.1	1.5	41	25	5		13.91
620.403.00.1	25	32	1	6.4	1.4	41	25	5		18.34
620.413.00.1	25 / 32	32	1 1/4	6.7	1.5	47	25	5		18.34
620.404.00.1	32 / 25	40	1	6.4	1.4	47	25	5		21.72
620.414.00.1	32	40	1 1/4	6.7	1.5	47	25	5		21.72
620.424.00.1	32 / 40	40	1 1/2	6.7	1.5	54	25	5		21.72
620.405.00.1	40	50	1 1/2	9.3	1.7	60	20	2		47.85
620.415.00.1	40 / 50	50	2	9.7	1.8	67	20	2		47.85
620.406.00.1	50	63	2	10.2	1.9	75	10		1	72.31
620.416.00.1	50 / 65	63	2 1/2	10.7	1.9	83	10		1	72.31
620.407.00.1	65	75	2 1/2	10.7	2.5	86	5		1	139.05

Geberit FlowFit bend adaptor 90° with male thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.510.00.1	12 / 15	16	1/2	90	5.7	2.5	2.4	50	10		12.25
620.520.00.1	12 / 20	16	3/4	90	6	3.1	2.7	50	10		12.25
620.511.00.1	15	20	1/2	90	6.1	2.8	2.8	50	10		15.02
620.521.00.1	15 / 20	20	3/4	90	6	2.7	2.7	50	10		15.02
620.502.00.1	20	25	3/4	90	6	2.9	2.7	25	5		23.89
620.512.00.1	20 / 25	25	1	90	6.3	3.2	3	25	5		23.89
620.503.00.1	25	32	1	90	6.8	3.1	3.2	25	5		34.22
620.504.00.1	32	40	1 1/4	90	7.3	4.2	3.7	25	5		41.99
620.505.00.1	40	50	1 1/2	90	10.4	4.7	4.5	10	2		61.19
620.506.00.1	50	63	2	90	11.7	5.8	5.4	5		1	127.91

Geberit FlowFit 90° bend adaptor with male thread, long

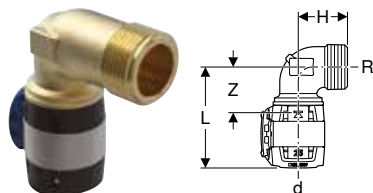

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Art. no.	DN	d, ø [mm]	R ["]	arc [°]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.522.00.1	12 / 15	16	1/2	90	5.7	3.7	2.4	50	10	13.48
620.523.00.1	12 / 20	16	3/4	90	6	4.5	2.7	50	10	13.48
620.524.00.1	15	20	1/2	90	6.1	3.7	2.8	50	10	16.51
620.525.00.1	15 / 20	20	3/4	90	6	4.5	2.7	50	10	16.51
620.526.00.1	20	25	3/4	90	6	4.5	2.7	25	5	26.32
620.527.00.1	20 / 25	25	1	90	6.3	5.6	3	25	5	26.32
620.528.00.1	25	32	1	90	6.8	5.6	3.2	25	5	37.73

Geberit FlowFit bend adaptor 90° with female thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.540.00.1	12 / 15	16	1/2	90	6.1	2.2	2.8	0.9	50	10		12.25
620.550.00.1	12 / 20	16	3/4	90	6.3	2.5	3	1.2	50	10		12.25
620.541.00.1	15	20	1/2	90	6.1	2.4	2.8	1.1	50	10		15.02
620.551.00.1	15 / 20	20	3/4	90	6.5	2.6	3.2	1.3	50	10		15.02
620.532.00.1	20	25	3/4	90	6.5	2.8	3.2	1.5	25	5		23.89
620.542.00.1	20 / 25	25	1	90	6.9	3	3.6	1.4	25	5		23.89
620.533.00.1	25	32	1	90	7.4	3.4	3.8	1.8	25	5		34.22
620.534.00.1	32	40	1 1/4	90	8.1	3.7	4.5	2.2	25	5		41.99
620.535.00.1	40	50	1 1/2	90	11.2	4.5	5.3	3	10	2		61.19
620.536.00.1	50	63	2	90	12.8	5.3	6.4	3.5	5		1	127.91

Adaptors and connections, detachable

Geberit FlowFit adaptor with MasterFix



[click & scan](#)

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243


Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data

Product material		PPSU						
Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.290.00.1	12 / 15	16	1/2	7.6	2.8	40	10	8.38
620.291.00.1	15	20	1/2	7.6	2.8	40	10	10.58

Geberit FlowFit elbow adaptor 90° with MasterFix



[click & scan](#)

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243


Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data

Product material		PPSU									
Art. no.	DN	d, ø [mm]	RpMF ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.490.00.1	12 / 15	16	1/2	90	4.3	5.8	2.7	2.5	40	10	9.72
620.491.00.1	15	20	1/2	90	4.3	5.8	2.8	2.5	40	10	10.58

Geberit FlowFit T-piece adaptor with MasterFix, through-flow


[click & scan](#)

Application purposes


- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	RpMF ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.380.00.1	12 / 15 / 12	16	1/2	16	90	11.5	4.3	2.5	2.7	2.5	30	5	11.98
620.381.00.1	15 / 15 / 12	20	1/2	16	90	11.5	4.3	2.5	2.8	2.5	30	5	14.45
620.391.00.1	15	20	1/2	20	90	11.5	4.3	2.5	2.8	2.5	30	5	14.45
620.382.00.1	20 / 15 / 15	25	1/2	20	90	11.5	4.1	2.5	2.6	2.5	20	5	16.69
620.392.00.1	20 / 15 / 20	25	1/2	25	90	11.5	4.1	2.5	2.6	2.5	20	5	16.69

Geberit FlowFit T-piece adaptor with MasterFix, branch fitting


[click & scan](#)

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	PPSU
------------------	------


Art. no.	DN	d, ø [mm]	RpMF1 ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.780.00.1	12 / 12 / 15	16	1/2	16	90	10.4	5.8	2.5	2.5	3.1	30	5	11.98
620.781.00.1	15	20	1/2	20	90	10.8	6	2.7	2.7	3.3	30	5	14.45

Characteristics

- Pressing connector with transparent protective cap
- Leaky if unpressed
- O-ring made of EPDM
- Pressing indicator
- MasterFix with blue protective cap



Geberit FlowFit adaptor to Compact


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Removable
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	di, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.560.00.1	12	16	21	5.4	2.4	20	5	6.95
620.561.00.1	15	20	21	5.4	2.4	20	5	8.38
620.562.00.1	20	25	21	5.5	2.4	20	5	10.58

Geberit FlowFit screw connection


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of fibre composite material

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.570.00.1	12	16	1/2	11.5	5	24	50	5		23.64
620.571.00.1	15	20	1/2	11.7	5.2	24	50	5		29.17
620.572.00.1	20	25	3/4	12.1	5.6	30	40	5		35.62
620.573.00.1	25	32	1	13.9	6.7	38	10		1	48.40
620.574.00.1	32	40	1 1/4	13.9	6.7	46	10		1	60.33
620.575.00.1	40	50	1 1/2	19.1	7.2	55	10		1	111.24
620.576.00.1	50	63	2	20.5	7.8	67	5		1	230.82

Geberit FlowFit adaptor union with male thread

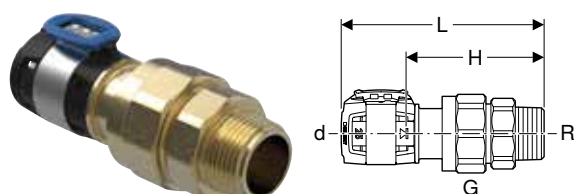
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap
- Flat gasket made of fibre composite material

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.580.00.1	12 / 15	16	1/2	3/4	8.7	5.4	30	50	10		19.48
620.581.00.1	15	20	1/2	3/4	9.3	6	30	50	10		23.89
620.591.00.1	15 / 20	20	3/4	1	9.4	6.1	30	40	5		23.89
620.582.00.1	20	25	3/4	1	10.2	6.9	38	25	5		30.57
620.583.00.1	25	32	1	1 1/4	10.5	6.9	46	25	5		46.15
620.593.00.1	25 / 32	32	1 1/4	1 1/2	10.8	7.2	46	10	2		46.15
620.584.00.1	32	40	1 1/4	1 1/2	11.3	7.7	55	20	5		58.41
620.594.00.1	32 / 40	40	1 1/2	1 3/4	11.3	7.7	55	10	2		58.41
620.585.00.1	40	50	1 1/2	1 3/4	14.9	9	62	10		1	111.24
620.595.00.1	40 / 50	50	2	2 3/4	14.9	8.9	67	10		1	111.24
620.586.00.1	50	63	2	2 3/4	15.3	8.9	89	5		1	161.32
620.596.00.1	50 / 65	63	2 1/2	2 3/4	15.5	9.2	89	5		1	161.32

Geberit FlowFit adaptor union with female thread

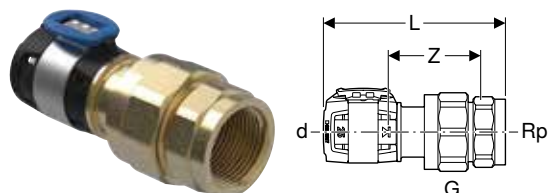
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug
- Flat gasket made of fibre composite material

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.600.00.1	12 / 15	16	1/2	3/4	7.9	3.3	30	50	10		19.48
620.601.00.1	15	20	1/2	3/4	8.5	3.9	30	50	10		23.89
620.602.00.1	20	25	3/4	1	9.2	4.4	38	25	5		30.57
620.603.00.1	25	32	1	1 1/4	9.4	4.1	46	25	5		46.15
620.613.00.1	25 / 32	32	1 1/4	1 1/4	10.6	5.1	46	25	5		46.15
620.604.00.1	32	40	1 1/4	1 1/2	10.9	5.4	55	10		1	58.41
620.614.00.1	32	40	1 1/2	1 1/2	11.2	5.6	55	10		1	58.41
620.605.00.1	40	50	1 1/2	1 1/2	13.8	5.9	55	10		1	111.24
620.615.00.1	40 / 50	50	2	2	14.9	6.6	67	10		1	111.24
620.606.00.1	50	63	2	2 3/4	13.3	4.3	89	5		1	161.32

Geberit FlowFit adaptor with union nut

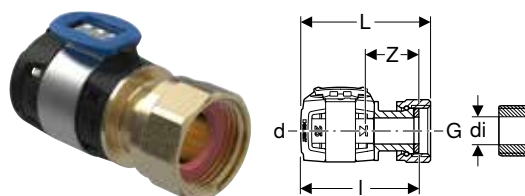

click & scan

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of fibre composite material

Art. no.	DN	d, Ø [mm]	G ["]	di, Ø [mm]	L [cm]	I [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.620.00.1	12	16	3/8	9	6.2	5.5	2.2	20	25	5		13.91
620.630.00.1	12 / 15	16	1/2	11	6.4	5.7	2.4	24	25	5		13.91
620.640.00.1	12 / 20	16	3/4	17	5.9	5.2	1.9	30	50	10		13.91
620.650.00.1	12 / 25	16	1	21	6.2	5.4	2.1	38	50	10		13.91
620.621.00.1	15 / 12	20	3/8	9	6.2	5.5	2.2	20	10		1	16.12
620.631.00.1	15	20	1/2	11	6.4	5.7	2.4	24	50	10		16.12
620.641.00.1	15 / 20	20	3/4	16	6.5	5.8	2.5	30	25	5		16.12
620.651.00.1	15 / 25	20	1	21	6.3	5.5	2.2	38	50	10		16.12
620.672.00.1	15 / 30	20	1 1/8	23	6.4	5.5	2.2	41	10		1	17.21
620.661.00.1	15 / 32	20	1 1/4	27	6.6	5.6	2.3	46	50	10		17.21
620.671.00.1	15 / 40	20	1 1/2	32	6.2	5	1.7	55	50	10		17.21
620.622.00.1	20 / 15	25	1/2	11	6.4	5.7	2.4	24	25	5		20.31
620.632.00.1	20	25	3/4	15	6.5	5.8	2.5	30	25	5		20.31
620.642.00.1	20 / 25	25	1	20	7.3	6.3	3	38	25	5		20.31
620.652.00.1	20 / 32	25	1 1/4	27	6.8	5.8	2.5	46	25	5		21.72
620.662.00.1	20 / 40	25	1 1/2	32	7.1	5.9	2.6	55	25	5		21.72
620.673.00.1	20 / 50	25	2	42	6.3	5	1.7	67	10		1	33.36
620.623.00.1	25 / 20	32	3/4	16	7	6.3	2.7	30	25	5		28.94
620.633.00.1	25	32	1	20	7.8	6.8	3.2	38	25	5		28.94
620.643.00.1	25 / 32	32	1 1/4	27	7.4	6.4	2.8	46	25	5		33.36
620.653.00.1	25 / 40	32	1 1/2	32	7.6	6.4	2.8	55	25	5		33.36
620.663.00.1	25 / 50	32	2	42	7.5	6.2	2.6	67	10		1	44.48
620.674.00.1	32 / 25	40	1	20	7.8	6.8	3.2	38	25	5		45.46
620.624.00.1	32	40	1 1/4	27	7.9	6.9	3.3	46	10	2		42.24
620.634.00.1	32	40	1 1/2	33	8	6.9	3.3	55	25	5		42.24
620.664.00.1	32 / 40	40	1 3/4	33	8.9	7.6	4	62	25	5		43.18
620.644.00.1	32 / 50	40	2	42	7.8	6.5	2.9	67	10	2		53.38
620.654.00.1	32 / 65	40	2 1/4	42	7.7	6.3	2.7	74	5		1	53.38
620.625.00.1	40	50	1 1/2	33	10.6	9.5	3.6	55	10	2		59.52
620.635.00.1	40	50	1 3/4	33	11.5	10.2	4.3	62	10	2		59.52
620.645.00.1	40 / 50	50	2	42	11	9.9	3.9	67	10	2		70.66
620.655.00.1	40 / 50	50	2 1/4	42	10.8	9.4	3.5	74	10		1	70.66
620.665.00.1	40 / 50	50	2 3/8	52	10.9	9.4	3.5	78	10		1	70.66
620.695.00.1	40 / 65	50	2 1/2	54	10.9	9.7	3.8	83	10	2		72.24
620.675.00.1	40 / 65	50	2 3/4	62	10.7	9.1	3.2	89	10		1	70.66
620.626.00.1	50 / 50	63	2	42	11.5	10.4	4	67	10	2		93.42
620.636.00.1	50 / 50	63	2 3/8	52	11.6	10.5	4.1	78	5		1	93.42
620.646.00.1	50 / 65	63	2 1/2	54	11.8	10.2	3.9	83	5		1	93.42
620.656.00.1	50 / 65	63	2 3/4	62	11.5	9.9	3.6	89	5		1	93.42

Geberit FlowFit 90° bend adaptor with union nut

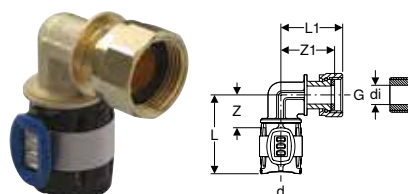
[click & scan](#)

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, Ø [mm]	G ["]	arc [°]	d _i , Ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.685.00.1	12	16	3/8	90	9	5.4	3.7	3.6	3.1	22	25	5	17.89
620.686.00.1	12 / 15	16	1/2	90	11	5.6	4	3.6	3.3	24	25	5	17.89
620.688.00.1	15	20	1/2	90	11	5.6	4.2	3.5	3.5	24	50	10	20.84
620.689.00.1	15 / 20	20	3/4	90	16	5.8	3.2	3.5	3.6	30	50	10	20.84
620.693.00.1	20	25	3/4	90	15	5.9	4.5	3.5	3.8	30	25	5	26.27
620.694.00.1	20 / 25	25	1	90	20	6.3	5.2	3.5	4.3	38	25	5	26.27

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of fibre composite material

Geberit FlowFit adaptor union with clamping ring

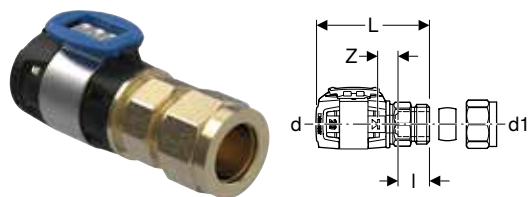
[click & scan](#)

Application purposes

- For copper pipes, rough, nickel-plated or chrome-plated
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	L [cm]	I [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.680.00.1	12 / 10	16	12	5.8	1.7	0.8	25	5	1	15.02
620.683.00.1	12 / 10	16	14	5.8	1.7	0.8		5	1	18.93
620.690.00.1	12	16	15	5.8	1.6	0.9	25	5	1	15.02
620.691.00.1	12	16	16	5.8	1.6	0.9		5	1	18.93
620.681.00.1	15 / 12	20	15	6	1.6	1.1	25	5	1	17.21
620.684.00.1	15	20	18	6	1.6	1.1	25	5	1	21.72

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Clamping ring union



Geberit FlowFit elbow adaptor 90° with clamping ring union

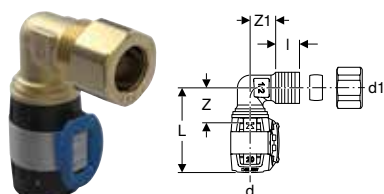

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Clamping ring union

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	I [cm]	Z [cm]	Z1 [cm]	SW [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.700.00.1	12 / 10	16	12	90	5.5	0.8	2.2	1.7	24	25	1	18.93
620.710.00.1	12	16	15	90	5.5	0.8	2.2	1.7	24	25	1	18.93
620.701.00.1	15 / 12	20	15	90	5.7	0.8	2.4	1.7	24	25	1	21.72

Geberit FlowFit adaptor to copper pipe clamping ring union



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Suitable exclusively for clamping ring unions
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	CuZn21Si3P / Cu
------------------	-----------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.720.00.1	12	16	15	7	3.7	25	5	1	16.69
620.721.00.1	15 / 12	20	15	7	3.7	25	5	1	18.93
620.722.00.1	20	25	22	7.4	4.1	25	5	1	23.37



- Suitable exclusively for clamping ring unions

Geberit FlowFit adaptor with screw connection to PEX pipes

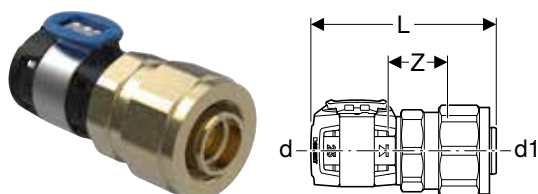

click & scan

Application purposes

- For technical building systems
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Clamping ring union

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	s1 [mm]	L [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.730.00.1	12	16	3/4	16	1.5	7.8	3.1	6	25	5	1	19.48
620.731.00.1	15	20	3/4	20	1.9	7.8	3.1	6	25	5	1	22.24
620.732.00.1	20	25	1	25	2.3	8	3.3	6	25	5	1	25.05

Geberit FlowFit flange PN6, with pressing unit

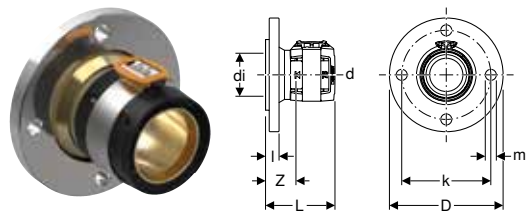

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flange, zinc-plated

Scope of delivery

- Geberit flange gasket, fibre composite material PN 6: DN=65 (600.057.00.1)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
619.616.00.1	65	75	70	16	130	14	11.3	2.4	5	4	6	1	166.86

Geberit FlowFit flange PN10/16, with pressing unit

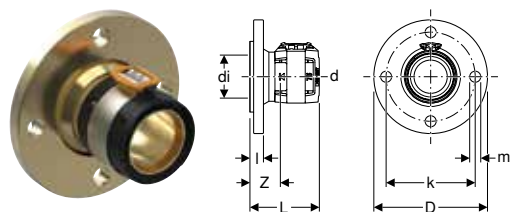

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flange made of brass CW617N


Scope of delivery

- Geberit flange gasket, fibre composite material PN 10/16: DN=65 (600.047.00.1)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
619.617.00.1	65	75	70	18.5	145	18	11.3	2.4	5	4	10 / 16	1	166.86

Catches

Geberit FlowFit pipe end plug

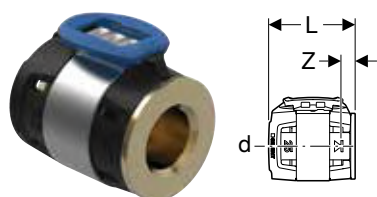

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap


Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.740.00.1	12	16	3.9	0.6	50	10	4.71
620.741.00.1	15	20	3.9	0.6	50	10	5.30
620.742.00.1	20	25	3.9	0.6	50	10	5.82

Outlet mounting boxes

Geberit FlowFit tap connector box 90° with MasterFix

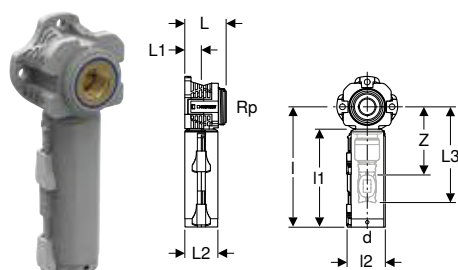

click & scan

Application purposes

- For Geberit system pipes PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Pressing indicator
- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Three fastening points
- Elbow connector made of gunmetal
- Adaptor with Masterfix, made of PPSU
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery

- Geberit FlowFit adaptor with MasterFix

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	I [cm]	I1 [cm]	I2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.681.00.3	12 / 15	16	1/2	90	5	2	4	11.6	14.6	11.8	4.6	8.2		5	1	21.22
651.681.00.3	15	20	1/2	90	5	2	4	11.6	14.6	11.8	4.6	8.2		5	1	22.24
652.682.00.3	15 / 20	20	3/4	90	5	2	4	11.6	14.6	11.8	4.6	8.2	5		1	46.22

Geberit tap connector box 90° for MasterFix

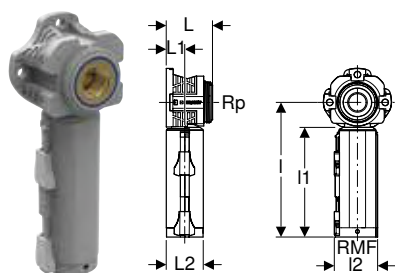

click & scan

Application purposes

- For Geberit system pipes PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	I2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.687.00.3	15	1/2	1/2	90	5	2	4	14.6	11.8	4.6	35	5		13.72
650.688.00.3	15 / 20	1/2	3/4	90	5	2	4	14.6	11.8	4.6			1	16.74


To order additionally

- Geberit FlowFit adaptor with MasterFix → p. 260

Characteristics

- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Male thread MF 1/2", compatible with MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Geberit FlowFit double tap connector box 90° with MasterFix

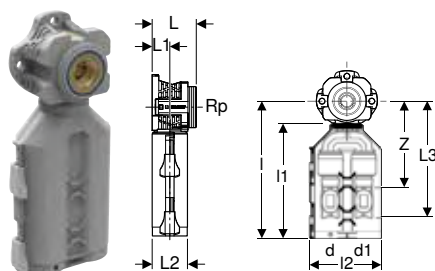

click & scan

Application purposes

- For Geberit system pipes PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery


- 2 Geberit FlowFit adaptor with MasterFix

Characteristics

- Pressing indicator
- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Three fastening points
- Elbow connector made of gunmetal
- Adaptor with Masterfix, made of PPSU
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	I [cm]	I1 [cm]	I2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.683.00.3	12 / 15 / 12	16	1/2	16	90	5	2	4	13.4	16.5	13.8	8.6	10.1		5	1	47.88
652.685.00.3	15 / 15 / 12	20	1/2	16	90	5	2	4	13.4	16.5	13.8	8.6	10.1	5		1	48.80

Geberit double tap connector box 90° for MasterFix

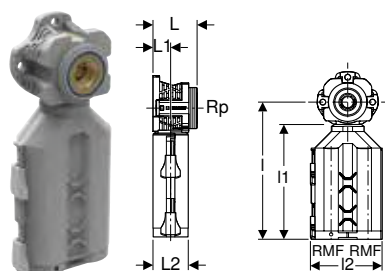

click & scan

Application purposes

- For Geberit system pipes PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics


- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Male thread MF 1/2", compatible with MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Art. no.	DN	RMF ["]	Rp ["]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	I2 [cm]	SU1 [pc.]	GBP/pc.
650.689.00.3	15	1/2	1/2	90	5	2	4	16.5	13.8	8.6	1	38.02

To order additionally

- Geberit FlowFit adaptor with MasterFix → p. 260

Geberit FlowFit tap connector box 90° with MasterFix, premounted

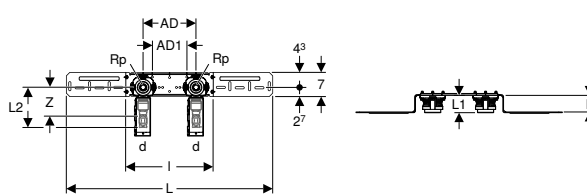

click & scan

Application purposes

- For Geberit system pipes PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics



- Pressing indicator
- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Elbow connector made of gunmetal
- Adaptor with Masterfix, made of PPSU
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 Geberit FlowFit adaptor with MasterFix
- 2 connector box necks
- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.791.00.3	12 / 15	16	1/2	90	15.3	10	59.7	5	11.6	25.7	4.8	8.2		5	1	55.98
651.791.00.3	15	20	1/2	90	15.3	10	59.7	5	11.6	25.7	4.8	8.2	90	5	1	58.14

Geberit tap connector box 90° for MasterFix, premounted


[click & scan](#)

Application purposes

- For Geberit system pipes PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Male thread MF 1/2", compatible with MeplaFix
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 connector box necks
- 2 protection plugs
- Fastening material


Art. no.	DN	RMF ["]	Rp ["]	arc [°]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.792.00.3	15	1/2	1/2	90	15.3	10	59.7	5	25.7	4.8	5	1	42.60

To order additionally

- Geberit FlowFit adaptor with MasterFix → p. 260

Connectors

Geberit FlowFit connection bend 90°


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Three fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L1 [cm]	I [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm											
620.750.00.1	12	16	3/8	90	6	1.9	1.3	2.7	25	5	11.39
620.760.00.1	12	16	1/2	90	6	1.9	1.3	2.8	50	10	11.39
620.751.00.1	15	20	3/8	90	6	1.9	1.3	2.7	25	5	11.98
620.761.00.1	15	20	1/2	90	6.3	1.9	1.3	3.1	40	10	11.98
L / length: 5.2 cm											
620.800.00.1	12	16	3/8	90	6	1.9	1.5	2.7	25	5	12.50
620.810.00.1	12	16	1/2	90	6	1.9	1.5	2.7	40	10	12.50
620.801.00.1	15	20	3/8	90	6	1.9	1.5	2.7	25	5	13.04
620.811.00.1	15	20	1/2	90	6	1.9	1.7	3.1	40	10	13.04
620.821.00.1	15	20	3/4	90	6.3	1.9	1.9	3	30	10	15.60
620.802.00.1	20	25	3/4	90	6.7	1.9	1.9	3.4	25	5	22.24
L / length: 7.8 cm											
620.770.00.1	12	16	1/2	90	6.8	1.9	3	3.5	30	10	17.21
620.771.00.1	15	20	1/2	90	7.3	1.9	3	4	30	10	21.13

Geberit FlowFit double elbow tap connector 90°

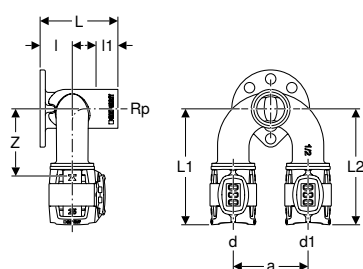

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Four fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	arc [°]	a [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 5.2 cm															
620.830.00.1	12 / 15 / 12	16	1/2	16	90	5	7.1	7.1	1.9	2.4	3.8	25	5		30.32
620.831.00.1	12 / 15 / 15	16	1/2	20	90	5	7.1	7.1	1.9	2.4	3.8	25	5		35.87
620.841.00.1	15 / 15 / 12	20	1/2	16	90	5	7.1	7.1	1.9	2.4	3.8	25	5		35.87
620.851.00.1	15	20	1/2	20	90	5	7.6	7.6	1.9	2.4	4.3	25	5		35.87
620.832.00.1	15 / 15 / 20	20	1/2	25	90	5	7.6	7.8	2.2	2.4	4.3	20	5	1	41.44
620.842.00.1	20 / 15 / 15	25	1/2	20	90	5	7.8	7.6	2.2	2.4	4.3	20	5	1	41.44
620.852.00.1	20 / 15 / 20	25	1/2	25	90	5	7.3	7.3	2.2	2.4	4.3	20	5		41.44

Geberit FlowFit T-elbow tap connector 90°, offset

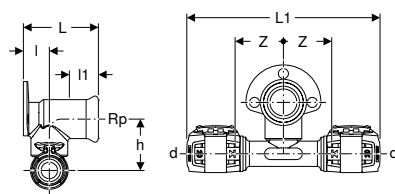

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Offset
- Three fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	arc [°]	L1 [cm]	I [cm]	I1 [cm]	h [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm													
620.951.00.1	15	20	1/2	20	90	13.4	1.8	1.5	3.6	3.4	20	10	20.59
L / length: 5.2 cm													
620.981.00.1	15	20	1/2	20	90	13.4	1.8	2.9	3.6	3.4	20	10	20.59

Geberit FlowFit corner elbow connector 90°

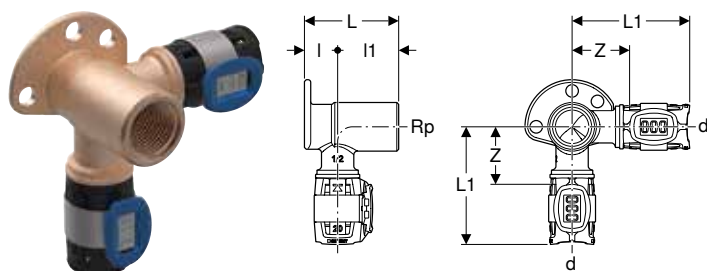

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Three fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm											
620.881.00.1	15	20	1/2	90	6.6	1.9	1.8	3.3	20	10	20.59
L / length: 5.2 cm											
620.921.00.1	15	20	1/2	90	6.6	1.9	3.4	3.3	20	10	20.59

Geberit FlowFit set of elbow tap connectors 90°, double

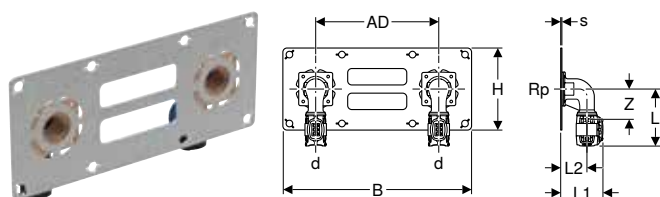

click & scan

Application purposes

- For technical building systems
- For drywall construction
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Scope of delivery

- 2 elbow tap connectors 90°
- Mounting plate
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	s [mm]	L [cm]	L1 [cm]	L2 [cm]	B [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.620.00.1	12	16	1/2	90	15	1.5	6.6	4.7	3	23	10	3.5	5	1	58.41
619.621.00.1	15	20	1/2	90	15	1.5	6.8	5.2	3.2	23	10	3.7	5	1	69.53

Geberit FlowFit connection bend 90°, premounted, single, offset, insulated

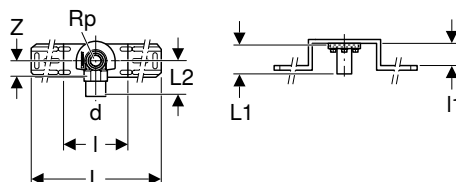

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Scope of delivery


- Protection plug
- Fastening material

Characteristics

- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.630.00.1	12	16	1/2	90	45	5.2	6	10	4	2.7	140	5	1	26.45
619.631.00.1	15	20	1/2	90	45	5.2	6	10	4	2.8	140	5	1	30.32

Geberit FlowFit connection bend 90°, premounted, double, offset, insulated

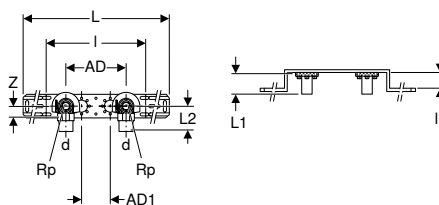

click & scan

Application purposes

- For potable water
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Scope of delivery



- Fastening material
- 2 protection plugs

Characteristics

- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.639.00.1	12	16	1/2	90	10	12	59.7	5.2	6	25.3	4	2.8	140	5	1	38.93
619.640.00.1	12	16	1/2	90	15.3	7.3	59.7	5.2	6	25.3	4	2.7	140	5	1	38.93
619.641.00.1	15	20	1/2	90	10	12	59.7	5.2	6	25.3	4	2.8	140	5	1	42.85
619.651.00.1	15	20	1/2	90	15.3	7.3	59.7	5.2	6	25.3	4	2.8	140	5	1	42.85

Geberit FlowFit connection bend 90°, premounted, double, offset

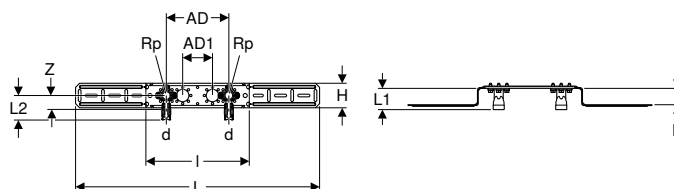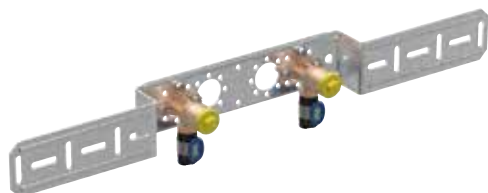

click & scan

Application purposes

- For potable water
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics



- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.660.00.1	12	16	1/2	90	15.3	7.3	59.7	5.2	6	25.7	4	6	2.7	140	5	1	36.51
619.661.00.1	15	20	1/2	90	15.3	7.3	59.7	5.2	6	25.7	4	6	2.7	140	5	1	40.04

Geberit FlowFit connection bend 90°, premounted, double, straight

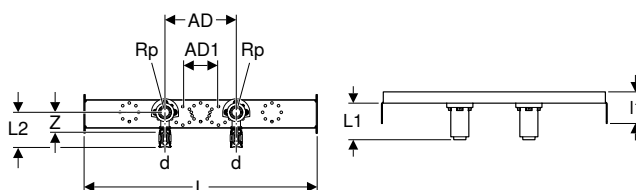

click & scan

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- For Geberit Duofix elements for washbasins
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 sealing washers
- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.670.00.1	12	16	1/2	90	15.3	7.7	50	7.8	7.3	7	4		5	1	44.14
619.671.00.1	15	20	1/2	90	15.3	7.7	50	7.8	7.3	7	4	120	5	1	48.40

Geberit FlowFit connection bend 90°, premounted, double, offset, with drain pipe bracket and connection bend

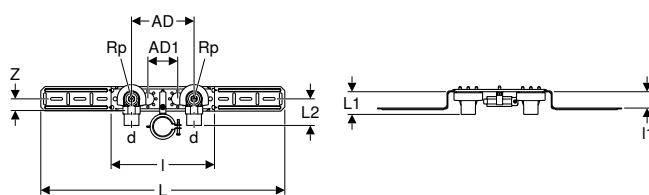

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- Pipe bracket for outlet bend
- 2 protection plugs
- Fastening material
- Connection bend 90° made of PE-HD, ø 50 mm

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.680.00.1	12	16	1/2	90	15.3	7.3	59.7	5.2	6	25.3	4	2.8	60	5	1	51.66
619.681.00.1	15	20	1/2	90	15.3	7.3	59.7	5.2	6	25.3	4	2.8	60	5	1	56.73

Geberit FlowFit connection bend 90°, premounted, double, angled

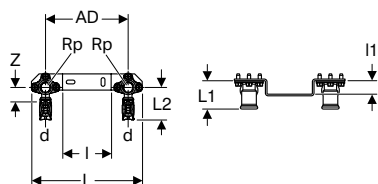

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.690.00.1	12	16	1/2	90	15.3	20.5	3.6	6	9	2.8	2.8	10	1	33.36

Geberit FlowFit connector T-piece for concealed cistern



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Fastening flange for Sigma concealed cisterns 8 cm
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	l [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.990.00.1	12 / 15 / 12	16	1/2	90	13.4	2.8	3.4	50	10	21.74
620.991.00.1	15	20	1/2	90	13.4	2.8	3.4	50	10	21.74

Geberit FlowFit elbow tap connector 90° for concealed cistern



click & scan

Application purposes

- For technical building systems
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Fastening flange for Sigma concealed cisterns 8 cm
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.790.00.1	12	16	1/2	90	6.8	2.8	3.5	25	5	18.93
620.791.00.1	15	20	1/2	90	7	3.1	3.7	25	5	18.93

Geberit FlowFit elbow tap connector 90° for concealed cistern



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- For concealed cisterns from third-party manufacturers
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Fastening flange for Twinline concealed cisterns 8 cm
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Knurled nut M35 x 1.5

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	l [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.890.00.1	12	16	1/2	90	6.8	3.8	2.8	3.5	50	10	25.32
620.891.00.1	15	20	1/2	90	6.8	3.8	2.8	3.5	50	10	25.32

Geberit FlowFit bend wall feed-through 90°

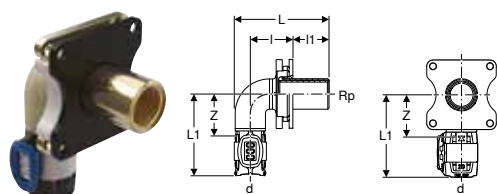

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Scope of delivery

- Sound insulation base
- Distance element

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	I2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.803.00.1	12 / 15	16	1/2	90	7.7	6.7	3.9 / 3.4 / 2.9	2.5 / 3 / 3.5	2.5	3.4	20	2	33.58
620.804.00.1	15	20	1/2	90	7.7	6.7	3.9 / 3.4 / 2.9	2.5 / 3 / 3.5	2.5	3.4	20	2	36.59

Geberit FlowFit T-wall feed-through 90°

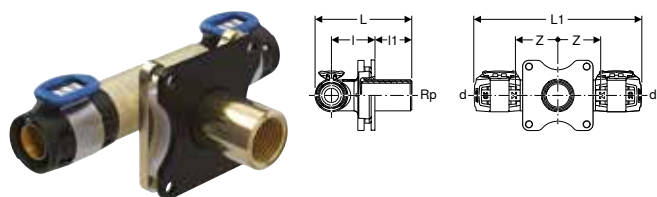

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Scope of delivery

- Sound insulation base
- Distance element

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	I2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.812.00.1	12 / 15 / 12	16	1/2	90	7.7	13.3	3.9 / 3.4 / 2.9	2.5 / 3 / 3.5	2.5	3.4	20	2	45.15
620.813.00.1	15	20	1/2	90	7.7	13.3	3.9 / 3.4 / 2.9	2.5 / 3 / 3.5	2.5	3.4	20	2	49.78

Geberit FlowFit corner wall feed-through 90°

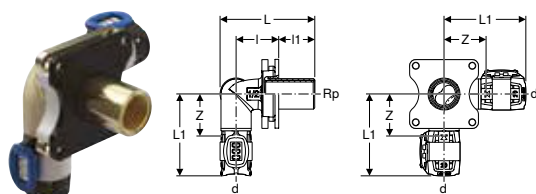
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug


Scope of delivery

- Sound insulation base
- Distance element

Art. no.	DN	d, ø [mm]	Rp ["]	arc [°]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	I2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.822.00.1	12 / 15 / 12	16	1/2	90	7.7	6.7	3.9 / 3.4 / 2.9	2.5 / 3 / 3.5	2.5	3.4	20	2	56.96
620.823.00.1	15	20	1/2	90	7.7	6.7	3.9 / 3.4 / 2.9	2.5 / 3 / 3.5	2.5	3.4	20	2	61.36

Manifolds with threaded connection

Geberit manifold with threaded connection and connection nipple for manifold, for MasterFix

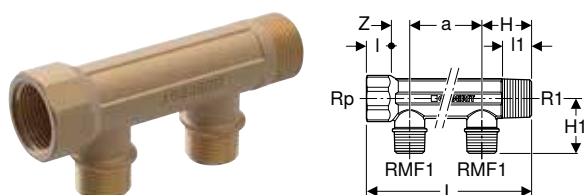
[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	DR-Brass CC770S
------------------	-----------------

Characteristics

- Connection nipple for manifold with male thread MF 1/2", compatible with MeplaFix


Art. no.	DN	Rp ["]	RMF1 ["]	R1 ["]	a [cm]	L [cm]	I [cm]	I1 [cm]	H [cm]	H1 [cm]	Z [cm]	Number of outlets	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.428.00.1	20 / 15 / 20	3/4	1/2	3/4	5	11.5	1.2	1.4	3.5	3.8	1.8	2	25	5	1	23.58
653.429.00.1	20 / 15 / 20	3/4	1/2	3/4	5	16.5	1.2	1.4	3.5	3.8	1.8	3	25	5	1	29.96

Accessories

- Geberit FlowFit adaptor with MasterFix → p. 260



Geberit FlowFit adaptor with MasterFix



click & scan

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Characteristics


- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data

Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.290.00.1	12 / 15	16	1/2	7.6	2.8	40	10	8.38
620.291.00.1	15	20	1/2	7.6	2.8	40	10	10.58

Geberit stepped bend with male thread



click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Male thread

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	R ["]	A [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.478.00.1	20	3/4	2	6.6	30	25	5	1	36.19

Geberit cap with MasterFix



click & scan

Application purposes


- For technical building systems, industry and shipbuilding
- For permanent closing of male threads RMF 1/2"
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	RpMF ["]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
653.420.00.1	15	1/2	3.2	50	5	5.66

Geberit FlowFit connection nipple for manifold, for Euro cone


[click & scan](#)

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, Ø [mm]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.330.00.1	12 / 20	16	3/4	6.1	2.6	27	50	10	1	12.27
620.331.00.1	15 / 20	20	3/4	6.5	3.1	27	50	10	1	14.45

Geberit FlowFit union connector for Euro cone, for system pipes ML/PB


[click & scan](#)

Application purposes

- For Geberit system pipes ML
- For Geberit system pipe PB
- For Geberit single-layer system pipes
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Clamping ring union
- Union nut made of brass, nickel-plated
- Lead-free
- O-ring made of EPDM

Technical data

Product material	Brass CW617N
------------------	--------------


Art. no.	Colour / surface	DN	d, Ø [mm]	G ["]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.055.00.1	nickel-plated	12 / 20	16	3/4	27	100	2	2.97
619.056.00.1	nickel-plated	15 / 20	20	3/4	27	100	2	2.97



Distributor with press connection

New

Geberit piping manifold with FlowFit pressing connections

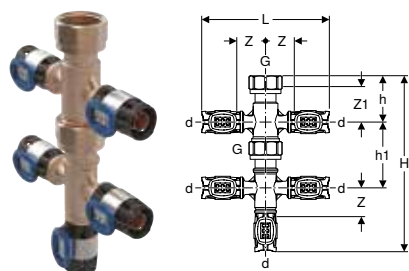

click & scan

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	H [cm]	h [cm]	h1 [cm]	Z [cm]	Z1 [cm] of outlets	Number	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.434.00.1	12 / 20	16	3/4	12.2	10.5	4.4		2.75	3.7	3	25	5	1	51.69
653.435.00.1	12 / 20	16	3/4	12.2	16.7	4.4	6.2	2.75	3.7	5	25	5	1	61.09

Available as of April 2025

T-pieces for heating

Geberit FlowFit T-piece crossing with insulation box

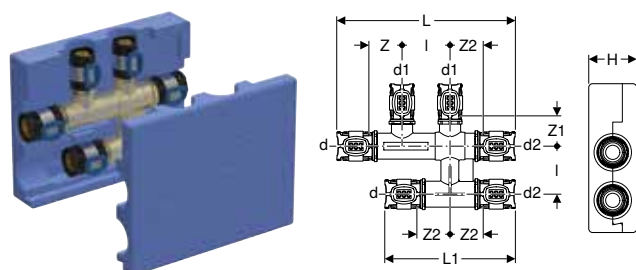

click & scan

Application purposes

- For connecting to two parallel pipes without intersecting
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)


Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.300.00.1	12	16	16	16	90	18.6	13.6	5	5	3.5	3.5	3.5	10	1	47.26
619.311.00.1	15 / 12 / 12	20	16	16	90	18.6	13.6	5	5	3	3	3.4	10	1	49.51
619.321.00.1	15 / 12 / 15	20	16	20	90	18.6	13.6	5	5	3	3	3.4	10	1	49.51
619.331.00.1	15	20	20	20	90	18.6	13.6	5	5	3	3	3.4	10	1	49.51
619.302.00.1	20 / 12 / 15	25	16	20	90	18.6	13.6	5	5	3.3	3	3.3	10	1	55.06
619.312.00.1	20 / 12 / 20	25	16	25	90	18.6	13.6	5	5	3.3	3	3.3	10	1	55.06
619.322.00.1	20 / 15 / 20	25	20	25	90	18.6	13.6	5	5	3.5	3.5	3.5	10	1	55.06

Adaptors and connections for heating, detachable

Geberit FlowFit adaptor with screw connection to PEX pipes

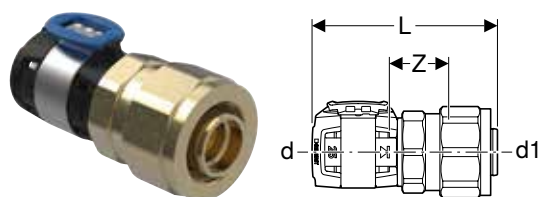

click & scan

Application purposes

- For technical building systems
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap



Scope of delivery

- Clamping ring union

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	s1 [mm]	L [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.730.00.1	12	16	3/4	16	1.5	7.8	3.1	6	25	5	1	19.48
620.731.00.1	15	20	3/4	20	1.9	7.8	3.1	6	25	5	1	22.24
620.732.00.1	20	25	1	25	2.3	8	3.3	6	25	5	1	25.05

Connections for heating

Geberit connector box type T

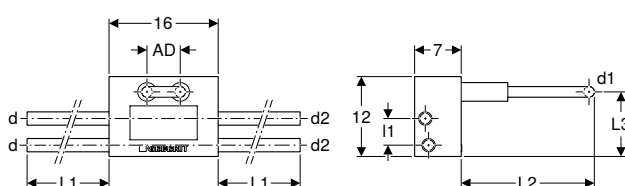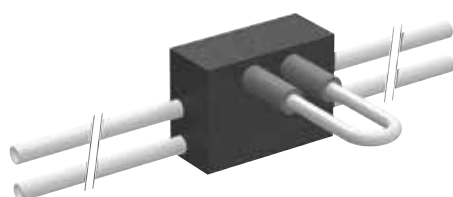

click & scan

Application purposes

- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data


Product material	PE-RT II / Al / PE-RT II
Material, insulation	PUR
Insulation thickness	6 mm
Thermal conductivity, insulation	0.03 W/(m·K)

Characteristics

- System pipe forms a barrier against diffusion
- System pipe, silver grey RAL 7001 exterior
- For pressure test without radiator

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	AD [cm]	L1 [cm]	L2 [cm]	L3 [cm]	I1 [cm]	SU2 [pc.]	GBP/pc.
619.371.00.1	15 / 12 / 15	20	16	20	5	30	20	8	4.2	10	126.28

Geberit FlowFit metal pipe connector bend 90°

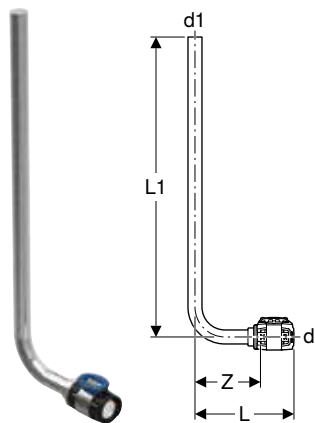

click & scan

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- Copper connection pipe
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Metal pipe connector bend 90°

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.380.22.1	12	16	14	90	12.8	30	9.5	20	2	14.77
619.391.22.1	15 / 12	20	14	90	12.8	30	9.4	20	2	15.60

Geberit FlowFit metal pipe connector bend 90° with adaptor with union nut for Euro cone

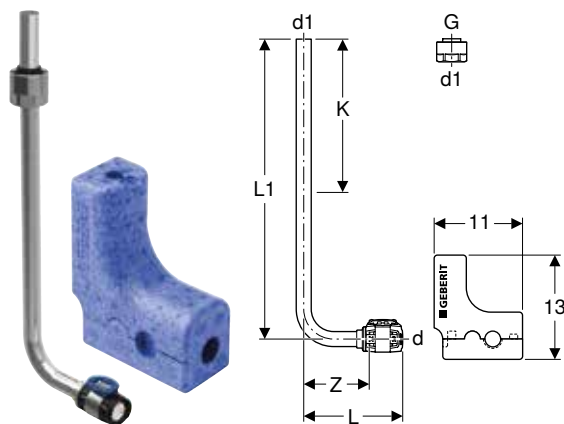

click & scan

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- Copper connection pipe
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Metal pipe connector bend 90°
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP


Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	arc [°]	L [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 30 cm											
619.400.22.1	12 / 20	16	3/4	15	90	12.8	9.5	17	20	2	17.80
619.401.22.1	15 / 20	20	3/4	15	90	12.7	9.4	17	20	2	19.48

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	arc [°]	L [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 100 cm											
619.410.22.1	12 / 20	16	3/4	15	90	12.8	9.5	87	20	2	33.36
619.411.22.1	15 / 20	20	3/4	15	90	12.7	9.4	87	20	2	35.62



- Tighten the union as far as it will go

Geberit FlowFit metal pipe connector T-piece with union connector for Euro cone

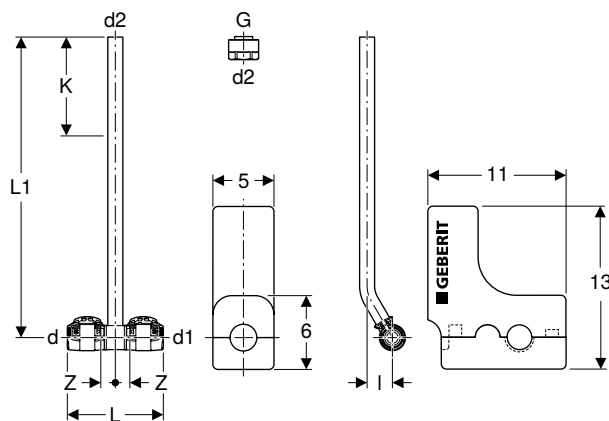

click & scan

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Leaky if unpressed
- Nickel-plated
- Copper connection pipe
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Two-piece insulation box

Scope of delivery

- Metal pipe connection T-piece
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP


Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	arc [°]	L [cm]	L1 [cm]	I [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.420.22.1	12 / 20 / 12	16	3/4	16	15	90	9	30	2.5	1.3	17	20	2	22.24
619.421.22.1	15 / 20 / 15	20	3/4	20	15	90	9	30	2.5	1.3	17	20	2	23.89



- Tighten the union as far as it will go



Geberit FlowFit set of connector T-pieces for inlet and return flow, with union connector for Euro cone

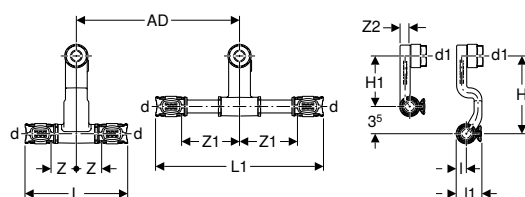

click & scan

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Installation completely in front of the wall

Scope of delivery


- 2 union connectors for Euro cone G 3/4"
- Connector T-piece with long connection
- Connector T-piece with short connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	AD [cm]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	H [cm]	H1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.440.22.2	12	16	15	90	5	12.8	21.2	1.1	2.4	10	6.5	3.1	7.3	1.3	10	1	44.48
619.441.22.2	15 / 12 / 15	20	15	90	5	12.8	21.2	1.3	2.4	10	6.5	3.1	7.3	1.3	10	1	46.77



- Tighten the union as far as it will go

Geberit FlowFit set of connector end pieces for inlet and return flow, with union connector for Euro cone

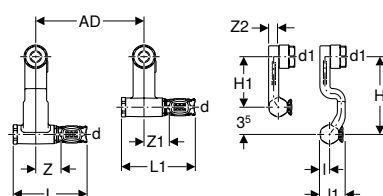

click & scan

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Installation completely in front of the wall

Scope of delivery


- 2 union connectors for Euro cone G 3/4"
- Connector T-piece with long connection
- Connector T-piece with short connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	AD [cm]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	H [cm]	H1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Connection	SU1 [pc.]	GBP/pc.
619.450.22.1	12	16	15	90	5	9.3	13.5	1.1	2.4	10	6.5	3.1	7.3	1.3	left	1	44.48
619.460.22.1	12	16	15	90	5	9.3	13.5	1.1	2.4	10	6.5	3.1	7.3	1.3	right	1	44.48



- Tighten the union as far as it will go

Geberit FlowFit union connector for Euro cone, for system pipes ML/PB


[click & scan](#)

Application purposes

- For Geberit system pipes ML
- For Geberit system pipe PB
- For Geberit single-layer system pipes
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Characteristics


- Clamping ring union
- Union nut made of brass, nickel-plated
- Lead-free
- O-ring made of EPDM

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	Colour / surface	DN	d, ø [mm]	G ["]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.055.00.1	nickel-plated	12 / 20	16	3/4	27	100	2	2.97
619.056.00.1	nickel-plated	15 / 20	20	3/4	27	100	2	2.97

Geberit FlowFit tap connector, straight, with union nut

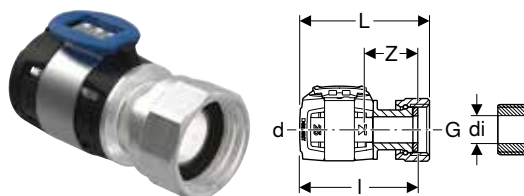
[click & scan](#)

Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of fibre composite material

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------


Art. no.	DN	d, ø [mm]	G ["]	d _i , ø [mm]	L [cm]	I [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.490.22.1	12	16	1/2	11	6.4	5.7	2.4	24	25	5	14.77
619.491.22.1	15	20	1/2	11.4	6.4	5.7	2.4	24	25	5	16.96
619.492.22.1	20	25	3/4	14.8	6.5	5.8	2.5	30	25	5	21.42

Accessories

- Geberit FlowFit cover for pressing connection → p. 289



Geberit FlowFit union connector with male thread


[click & scan](#)

Application purposes

- For Geberit system pipes ML
- For connecting to radiator valves Herz with female thread G 1/2" in accordance with EN 215, construction dimension series D
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Clamping ring union
- Threaded nipple made of lead-free brass, nickel-plated
- Lead-free
- O-ring made of EPDM

Scope of delivery

- Set of 2 pieces

Technical data


Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	G ["]	SW [mm]	SU2 [pc.]	GBP/pc.
619.267.22.1	12	16	1/2	22	2	3.90



- Tighten the union as far as it will go

Geberit FlowFit connector for Euro cone, with union nut


[click & scan](#)

Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.260.22.1	12 / 20	16	3/4	6.1	1.8	27	10	2	1	10.89
619.261.22.1	15 / 20	20	3/4	6.5	2.3	27	10	2	1	13.09

Accessories

- Geberit FlowFit cover for pressing connection → p. 289

Geberit FlowFit tap connector, straight with male thread


[click & scan](#)

Application purposes

- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 243

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.471.22.1	15	20	1/2	6.4	3.1	22	25	5	9.81
619.481.22.1	15 / 20	20	3/4	6.5	3.2	27	25	5	9.81
619.472.22.1	20 / 15	25	1/2	6.4	3.1	22	25	5	12.27
619.482.22.1	20	25	3/4	6.8	3.5	27	25	5	12.27

Accessories

Sealings for fittings

Geberit FlowFit sleeve

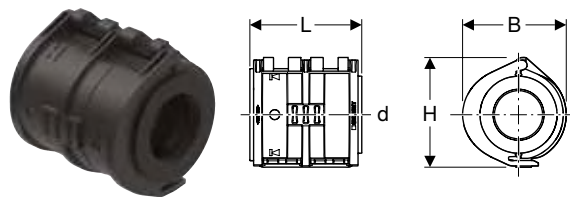

click & scan

Application purposes

- For optional protection of the Geberit FlowFit pipe cross-sections against external corrosion in permanently damp environments
- For alternative use instead of Geberit sealing tape

Characteristics

- Black


Technical data

Product material	PP-TV20 / TPS
------------------	---------------

Art. no.	d, ø [mm]	L [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.720.00.1	16	4.5	3.8	3.9	100	10	6.85
619.721.00.1	20	4.5	4.2	4.2	100	10	7.30
619.722.00.1	25	4.5	4.7	4.8	100	10	7.99

Cover for fittings

Geberit FlowFit cover for pressing connection

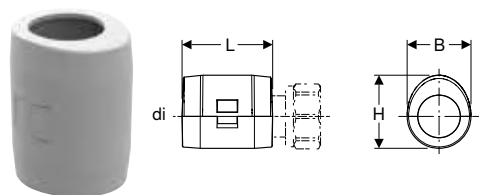

click & scan

Application purposes

- For optical covering of exposed pressing units
- For visible radiator connection with Geberit FlowFit pressing connections and threads for Euro cone

Technical data

Product material	ASA
------------------	-----


Characteristics

- Two-piece
- Elliptic

Art. no.	Colour / surface	di, ø [mm]	L [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.738.00.1	white alpine	16	4.4	2.7	3.2	10	2	2.99
619.739.00.1	white alpine	20	4.4	3.1	3.6	10	2	2.99

Pipe fastenings

Geberit anchor-point bracket

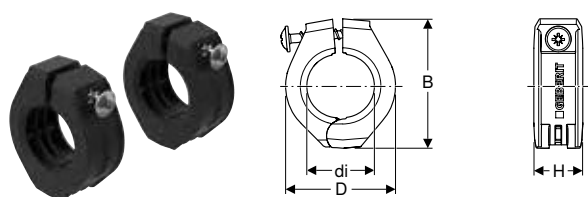

click & scan

Application purposes

- For anchor-point fastening of Geberit system pipes ML

Characteristics


- One-piece
- Black

Technical data

Product material	PA 6
------------------	------

Art. no.	di, Ø [mm]	D [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.730.00.1	16	3.1	4	1.9	50	10	7.88
619.731.00.1	20	3.5	4.4	1.9	50	10	8.92
619.732.00.1	25	4	4.9	1.9	50	10	9.94
619.733.00.1	32	4.7	5.6	1.9	50	10	11.53
619.734.00.1	40	5.6	6.5	1.9	40	10	13.66
619.735.00.1	50	6.6	7.8	2.2	20	2	16.51
619.736.00.1	63	8	9.1	2.2	20	2	20.97
619.737.00.1	75	9.2	10.3	2.2	10	2	28.31

Geberit support shell, zinc-plated and coated



click & scan

Application purposes

- For stabilising Geberit fastening systems

Characteristics


- Coated
- Steel, black coated exterior
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	di, Ø [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
360.850.00.1	coated	40	40	0.75	3	30	3	11.53
361.850.00.1	coated	50	50	0.75	3	30	3	12.90
364.850.00.1	coated	60	63	0.75	3	30	3	17.39
365.850.00.1	coated	70	75	0.75	3	30	3	17.57

Geberit double nipple M10 / G 1/2"



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.79

Geberit threaded pipe



click & scan

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	115	2	1	36.07

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.50

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



click & scan

Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	4.04

System seals

Geberit flange gasket, fibre composite material PN 10/16



[click & scan](#)

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, ø [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
600.042.00.1	20	60	25	2	10 / 16	5	1	2.30
600.043.00.1	25	70	30	2	10 / 16	5	1	2.73
600.044.00.1	32	82	38	2	10 / 16	5	1	3.24
600.045.00.1	40	92	45	2	10 / 16	5	1	3.87
600.046.00.1	50	107	57	2	10 / 16	5	1	4.59
600.047.00.1	65	127	76	2	10 / 16	5	1	5.75
600.048.00.1	80	142	89	2	10 / 16	5	1	6.91
600.049.00.1	100	162	108	2	10 / 16	5	1	8.29

Geberit flange gasket, fibre composite material PN 6



[click & scan](#)

Application purposes

- For air conditioning cold water without antifreeze agent
- For air conditioning cold water with antifreeze agent
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 243
- Application overview – Geberit Mepla
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 11
- Application overview – Geberit Mapress Therm
- Application overview – Geberit Mapress Carbon Steel → p. 111
- Application overview – Geberit Mapress Copper → p. 167
- Application overview – Geberit Mapress CuNiFe → p. 221

Characteristics

- Silicone-free (LABS-free)


Technical data

Operating temperature	-30 – +180 °C
Product material	Fibre composite material

Art. no.	DN	da, ø [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
600.051.00.1	15	44	20	2	6	1	1.81
600.052.00.1	20	54	25	2	6	1	2.03
600.053.00.1	25	64	30	2	6	1	2.42
600.054.00.1	32	76	38	2	6	1	2.87
600.055.00.1	40	86	45	2	6	1	3.43
600.056.00.1	50	96	57	2	6	1	4.06
600.057.00.1	65	116	76	2	6	1	5.10
600.058.00.1	80	132	89	2	6	1	6.12
600.059.00.1	100	152	108	2	6	1	7.32

Bolt sets for flange connections

Geberit bolt set for flange connection, made of zinc-plated steel



click & scan

Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------

Characteristics


- Zinc-plated
- Strength class 8.8, EN 20898-2

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	2.56
91065	10	11	5	3.6	4	2.56
91066	12	14	5	3	4	2.56
91067	12	14	5.5	3.5	4	2.56
91068	12	14	6	4	4	2.56
91069	16	18	5.5	3.3	4	2.56
91070	16	18	6	3.8	4	2.56
91071	16	18	6.5	4.3	4	2.56
91072	16	18	7	4.8	4	2.56
91073	16	18	8	5.8	4	2.56

Geberit bolt set for flange connection, made of CrNi steel



click & scan

Application purposes

- For flanges made of stainless steel, gunmetal and brass

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.54
91165	10	11	5	3.6	4	2.54
91166	12	14	5	3	4	3.17
91167	12	14	5.5	3.5	4	3.17
91168	12	14	6	4	4	2.42
91169	16	18	5.5	3.3	4	2.87
91170	16	18	6	3.8	4	2.87
91171	16	18	6.5	4.3	4	2.87
91172	16	18	7	4.8	4	2.87
91173	16	18	8	5.8	4	2.87



Consumables

Geberit leak detection spray



[click & scan](#)

Application purposes

- For a dry leak test

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Art. no.	Content [ml]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	16.69





Pipe Valve Fittings


Straight-seat valves	300
With Mapress pressing connections.	300
Straight-seat valves for concealed installation	300
With Mepla pressing connections	300
With Mapress pressing connections.	301
With threaded connections.	302
Angle-seat valves	302
With FlowFit pressing connections	302
With Mepla pressing connections	303
With Mapress pressing connections.	303
Emptying valves.	304
Ball valves.....	304
With FlowFit pressing connections	304
With Mepla pressing connections	306
With Mapress pressing connections.	308
With Mapress pressing connections, FKM, blue.	314
Ball valves for concealed installation	315
With FlowFit pressing connections	315
With Compact connections	316
With Mapress pressing connections.	316
Non-return valves	317
With Mapress pressing connections.	317



Straight-seat valves

With Mapress pressing connections

Geberit Mapress straight-seat stop valve



click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Operating temperature	0–95 °C
Product material	Brass CW617N

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of brass
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Ø 22 mm with connection for emptying valve G 1/4", closed
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	DNV	d, Ø [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94862	12	15	15	6	13	10.5	4.5	10	1	72.25
94863	15	15	18	6	13.2	10.5	4.6	10	1	76.27
94864	20	20	22	6	14.2	10.9	5	10	1	88.31
94865	25	25	28	7	15.8	13.7	5.6	10	1	112.40
94866	32	32	35	7	17.2	16.2	6	10	1	144.47

Geberit emptying valve



click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics


- Screw cap

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	5	1	20.48

Straight-seat valves for concealed installation

With Mepla pressing connections

Geberit turn handle set for concealed stop valve



click & scan

Characteristics

- Chrome-plated


Scope of delivery

- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	33.90

With Mapress pressing connections

Geberit Mapress concealed stop valve with cover collar

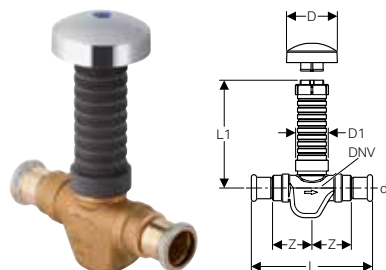

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Technical data

Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics


- Valve top fully exposed to flow
- Maintenance-free spindle seal
- Replaceable upper part
- Protection box can be cut to length
- Valve and upper part seals made of EPDM
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)

Art. no.	DN	DNV	d, ø [mm]	D [cm]	D1 [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94902	12	15	15	7	3.9	14	11	4.9	10	1	119.57
94903	15	15	18	7	3.9	14	11	5.5	10	1	131.54
94904	20	20	22	7	3.9	14.5	11	5.5	10	1	131.54
94905	25	25	28	7	4.6	18	11.5	6.8	10	1	191.93

Geberit turn handle set for concealed stop valve



click & scan

Characteristics

- Chrome-plated


Scope of delivery

- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	33.90

With threaded connections

Geberit turn handle set for concealed stop valve



click & scan

Characteristics

- Chrome-plated

Scope of delivery


- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	33.90

Angle-seat valves

With FlowFit pressing connections

Geberit FlowFit angle-seat stop valve



click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Characteristics

- Valve top fully exposed to flow
- Valve body made of lead-free gunmetal
- Upper part made of lead-free gunmetal
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve 1/4", closed
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	DNV	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.830.00.1	12	15	16	6	14	1.8	10.2	2.6	5.4	10	10	1	64.09
619.831.00.1	15	15	20	6	14	1.8	10.2	2.6	5.4	10	10	1	66.88
619.832.00.1	20	20	25	6	15.4	0.5	10.5	2.4	7	10	10	1	84.41
619.833.00.1	25	25	32	7	17.3	2.9	13.5	3.4	7.4	10	10	1	104.72
619.834.00.1	32	32	40	7	19.3	3.3	15.6	3.7	9	10	5	1	157.22
619.835.00.1	40	40	50	7	24	0.6	16.4	3.2	10.2	10	5	1	206.62

With Mepla pressing connections

Geberit Mepla angle-seat stop valve



click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of lead-free gunmetal
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve 1/4", closed
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Art. no.	DN	DNV	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
602.032.00.1	15	15	20	6	12.7	3.3	9.5	2.1	4.9	10	10	1	83.15
603.032.00.1	20	20	26	6	14.7	2.6	10.2	2.2	5.9	10	10	1	95.03
604.032.00.1	25	25	32	7	15.4	5.6	13.2	2.6	6.9	10	10	1	118.75
605.032.00.1	32	32	40	7	18.6	6.8	15	3.2	8.4	10	5	1	170.24
606.032.00.1	40	40	50	7	19.6	6.2	16	2.3	9.3	10	5	1	278.51

With Mapress pressing connections

Geberit Mapress angle-seat stop valve



click & scan

Application purposes

- For cold and hot potable water
- For cold potable water up to 16 bar / 1600 kPa operating pressure
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics


- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of lead-free gunmetal
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve 1/4", closed
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	DNV	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94882	12	15	15	6	9.4	3.7	9	1.5	3.9	10	1	80.30
94883	15	15	18	6	9.5	3.3	9	1.1	4.5	10	1	84.31
94884	20	20	22	6	10.9	3.2	10.5	2.2	4.5	10	1	96.31
94885	25	25	28	7	13	4.4	13.2	2.1	6.3	10	1	120.42
94886	32	32	35	7	15.1	5.6	15.4	2.9	7	10	1	152.54
94887	40	40	42	7	17.8	4.3	16.2	3	8.8	10	1	208.70
94888	50	50	54	9	21.4	5.5	19.3	4.4	10	10	1	252.85



Emptying valves

Geberit emptying valve



[click & scan](#)

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Characteristics

- Screw cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	5	1	20.48

Ball valves

With FlowFit pressing connections

Geberit FlowFit ball valve with actuator lever

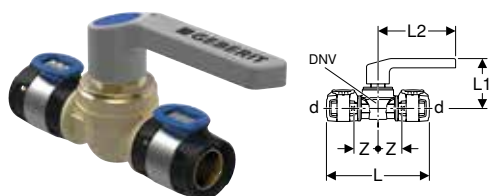

[click & scan](#)

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.850.00.1	12	8	16	11.9	5.8	9.2	2.7	10	10	1	38.18
619.851.00.1	15	15	20	12.1	5.9	9.2	2.8	10	10	1	41.74
619.852.00.1	20	15	25	12.2	5.9	9.2	2.8	10	10	1	49.08
619.853.00.1	25	20	32	13.4	6.2	9.2	3.1	10	10	1	68.17
619.854.00.1	32	25	40	14.4	7.1	12.4	3.6	10	10	1	109.07
619.855.00.1	40	32	50	20.9	7.6	12.4	4.5	10	5	1	177.26

Geberit FlowFit ball valve with male thread and actuator lever

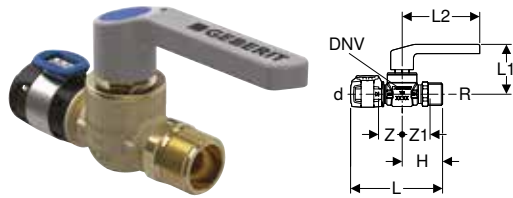

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	DN1	d, ø [mm]	R ["]	s [mm]	L [cm]	L1 [cm]	L2 [cm]	H [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.866.00.1	15	15	20	20	3/4	2	11.1	5.9	9.2	4.8	2.8	3.4	10	10	1	61.14
619.867.00.1	20	15	20	25	3/4	2.5	11	5.9	9.2	4.8	2.7	3.4	10	10	1	69.92

Geberit spindle extension set for ball valve



click & scan

Application purposes

- For lever fastening with screw

Scope of delivery


- Spindle extension
- Bolt

Art. no.	DNV	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
610.059.00.1	25 / 32	28 / 35 / 40 / 50	4	1	24.62
610.060.00.1	40 / 50	42 / 54 / 63 / 75	4	1	29.86



With Mepla pressing connections

Geberit Mepla ball valve with actuator lever, Ms

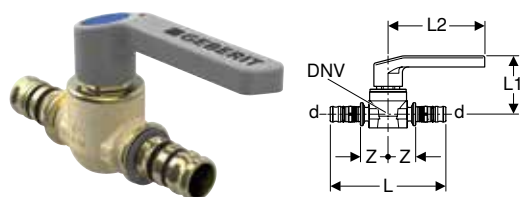

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics


- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.061.00.2	12	8	16	10.1	6	9.5	2.4	10	10	1	37.46
612.061.00.2	15	15	20	10.6	6	9.5	2.5	10	10	1	37.77
613.061.00.2	20	15	26	11.6	6	9.5	2.5	10	10	1	40.91
614.061.00.2	25	20	32	11.8	6.5	9.5	3	10	10	1	52.79
615.061.00.2	32	25	40	13.9	7.1	12.4	3.5	10	10	1	85.45
616.061.00.2	40	32	50	15.9	7.7	12.4	3.9	10	5	1	128.17

Geberit Mepla ball valve with male thread and actuator lever

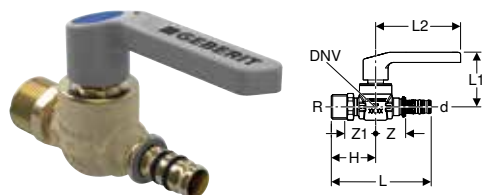

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics


- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	DN1	d, ø [mm]	R [°]	L [cm]	L1 [cm]	L2 [cm]	H [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
612.063.00.2	15	15	20	20	3/4	10.8	6	9.2	4.8	3.2	3.4	10	10	1	58.73

Geberit Mepla ball valve with actuator lever Rg/SiBr

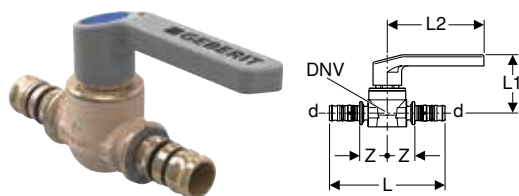

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Gunmetal / Lead-free silicon bronze
------------------	-------------------------------------

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	Product material	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.020.00.2	12	8	16	Gunmetal	10.1	6	9.5	2.4	10	10	1	63.03
602.020.00.2	P	15	15	20	Gunmetal	12	6	9.5	2.5	10	1	70.08
603.020.00.2	20	15	26	Gunmetal	12	6	9.5	2.5	10	10	1	84.11
604.020.00.2	25	20	32	Gunmetal	12	6.5	9.5	3	10	10	1	115.67
605.020.00.2	32	25	40	Gunmetal	13.9	7.1	12.4	3.5	10	5	1	168.22
606.020.00.2	40	32	50	Gunmetal	15.9	7.7	12.4	3.9	10	5	1	245.34

P: Phase out

Geberit Mepla ball valve with male thread and actuator lever

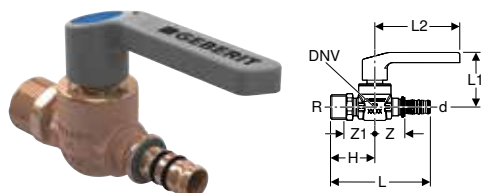

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Scope of delivery


- Colour markings (red, blue, green)

Art. no.	DN	DNV	DN1	d, ø [mm]	R [°]	L [cm]	L1 [cm]	L2 [cm]	H [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
602.023.00.2	15	15	20	20	3/4	10.8	6	9.2	4.8	3.2	3.4	10	10	1	103.01
603.023.00.2	20	15	20	26	3/4	10.8	6	9.2	4.8	2.7	3.4	10	10	1	122.20

Pipe Valve Fittings

Ball valves
With Mapress pressing connections

Geberit spindle extension set for ball valve



click & scan

Application purposes


- For lever fastening with screw

Scope of delivery

- Spindle extension
- Bolt

Art. no.	DNV	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
610.059.00.1	25 / 32	28 / 35 / 40 / 50	4	1	24.62
610.060.00.1	40 / 50	42 / 54 / 63 / 75	4	1	29.86

Geberit actuator lever set, small, for ball valve



click & scan

Application purposes

- For lever fastening with screw


Scope of delivery

- Actuator lever
- Bolt
- Colour markings (red, blue, green)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
242.807.00.1	8 / 15 / 20	10	1	13.31

With Mapress pressing connections

Geberit Mapress Stainless Steel ball valve with actuator lever

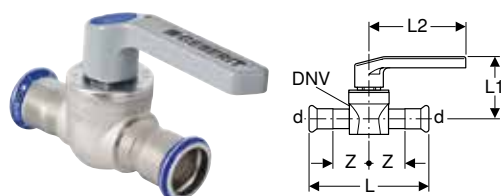

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For compressed air (oil purity class 0-3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 – +95 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94952	12	15	15	10.4	5.9	9.2	3.2	10	5	1	119.17
94953	15	15	18	10.4	5.9	9.2	3.2	10	5	1	128.48
94954	20	20	22	11.6	6.2	9.2	3.7	10	5	1	152.25
94955	25	25	28	13.4	7.1	12.4	4.4	10	5	1	180.92
94956	32	32	35	15.4	7.6	12.4	5.1	10	5	1	228.43
94957	40	40	42	17.7	8.3	14.7	5.9	10	5	1	276.06
94958	50	50	54	20.6	9	14.7	6.8	10	5	1	333.24

Geberit spindle extension set for ball valve



[click & scan](#)

Application purposes


- For lever fastening with screw

Scope of delivery

- Spindle extension
- Bolt

Art. no.	DNV	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
610.059.00.1	25 / 32	28 / 35 / 40 / 50	4	1	24.62
610.060.00.1	40 / 50	42 / 54 / 63 / 75	4	1	29.86

Geberit actuator lever set, small, for ball valve



[click & scan](#)

Application purposes

- For lever fastening with screw


Scope of delivery

- Actuator lever
- Bolt
- Colour markings (red, blue, green)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
242.807.00.1	8 / 15 / 20	10	1	13.31



Geberit Mapress ball valve, NPW, with actuator lever

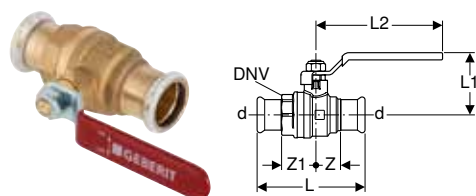

click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For installations with Geberit Mapress Carbon Steel
- For installations with Geberit Mapress Stainless Steel
- For installations with Geberit Mapress Copper
- For installations with Geberit Mapress Therm

Characteristics


- Ball made of brass, chrome-plated
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	Brass CW617N

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
94922	12	15	15	7.7	4.4	8.5	1.7	2.4	10		25		1	23.91
94923	15	15	18	8	4.4	8.5	1.7	2.4	10		25		1	25.22
94924	20	20	22	8.9	5.2	10.6	2.1	2.9	10	1200	25		1	29.83
94925	25	25	28	9.6	5.6	10.6	2.4	3.1	10	800	20	5	1	37.77
94926	32	32	35	10.9	6.1	10.6	2.7	3.4	10	640	10		1	48.67
94927	40	40	42	14.1	7.9	15.5	3.6	4.5	10		10		1	100.52
94928	50	50	54	15.7	9.4	17.5	3.9	4.8	10	250	5		1	134.71

Geberit Mapress ball valve, NPW, with spindle extension

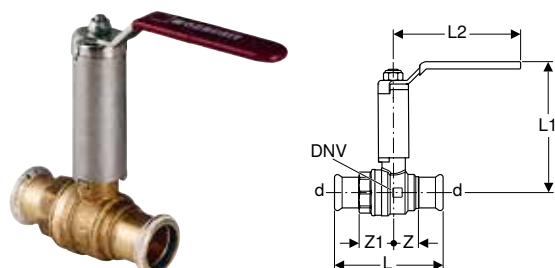

click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For installations with Geberit Mapress Carbon Steel
- For installations with Geberit Mapress Stainless Steel
- For installations with Geberit Mapress Copper
- For installations with Geberit Mapress Therm

Characteristics

- Ball made of brass, chrome-plated
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	Brass CW617N

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94962	12	15	15	7.7	10.4	8.5	1.7	2.4	10			1	64.04
94963	15	15	18	8	10.4	8.5	1.7	2.4	10			1	68.65
94964	20	20	22	8.9	11.7	10.6	2.1	2.9	10		25	1	76.96
94965	25	25	28	9.6	12.1	10.6	2.4	3.1	10	800	25	1	84.61
94966	32	32	35	10.9	12.6	10.6	2.7	3.4	10		10	1	107.99
94967	40	40	42	14.1	14	15	3.6	4.5	10		10	1	171.88
94968	50	50	54	15.7	15.5	17	3.9	4.8	10			1	215.95

Geberit spindle extension set for ball valve, NPW




click & scan

Scope of delivery

- Spindle extension
- Bolt
- Nut

Art. no.	DNV	d, ø [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
94935	15	15 / 18	6	5		1	1.46
94936	20 / 25 / 32	22 / 28 / 35	6.5	25		1	1.77
94937	40	42	6.5		5	1	2.38
94938	50	54	6.5		5	1	3.21

Geberit Mapress Stainless Steel ball valve with actuator lever, flanged

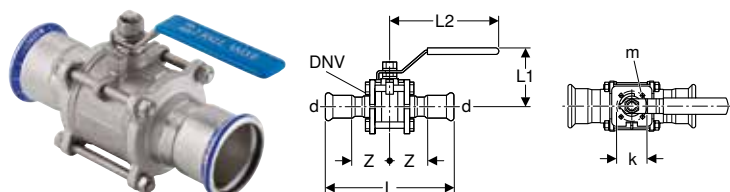

click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water and process water
- For treated water (application range according to Technical Information "Treated water")
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Technical data

Operating temperature	-20 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Characteristics


- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfills requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for d = 76.1–108 mm)
- Length-adjustable actuator lever (only for d = 108 mm)
- Lockable
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	DNV	d, ø [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
92100	12	15	15			12.2	5	9.3	4.1	40		25	1	103.15
92101	15	15	18			12.2	5	9.3	4.1	40		5	1	115.20
92102	20	20	22			13.3	5.6	10.3	4.5	40		20	1	144.43
92103	25	25	28			14.2	6.6	12.8	4.8	16		5	1	185.68
92104	32	32	35			17	7.5	12.8	5.9	16	250	5	1	226.93
92105	40	40	42			19.4	8.5	15.8	6.7	16		5	1	309.47
92106	50	50	54			22.1	9.6	15.8	7.5	16			1	412.60
92107	65	65	76.1	70	9	29.1	13.5	22.3	9.2	16	30		1	783.95
92108	80	80	88.9	70	9	33.3	14.5	35.8	10.6	16	12		1	1155.21
92109	100	100	108	102	11	41.2	17.7	50	13.1	16	12		1	1980.38

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 311

Geberit Mapress Stainless Steel ball valve with actuator lever and hose connector, flanged



click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water and process water
- For treated water (application range according to Technical Information "Treated water")
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Threaded nipple made of brass, with screw cap
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data



Operating temperature	-20 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DNV	d, ø [mm]	G ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92110	12	15	15	3/4	12.7	5	9.3	4.1	4.1	40	1	103.15
92112	20	20	22	1	13.6	5.6	10.3	4.5	4.2	40	1	144.43

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 311

Geberit Mapress CuNiFe ball valve with actuator lever, flanged



click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For grey and black water with pH value > 6.0
- For seawater
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Valve made of CrNiMo steel
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for $d = 76.1\text{--}108\text{ mm}$)
- Length-adjustable actuator lever (only for $d = 108\text{ mm}$)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 – +120 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DNV	d, ø [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92120	12	15	15			12.2	5	9.3	4.1	13	1	225.06
92122	20	20	22			13.3	5.6	10.3	4.5	13	1	315.09
92123	25	25	28			14.2	6.6	12.8	4.8	13	1	405.06
92124	32	32	35			17	7.5	12.8	5.9	13	1	441.52
92125	40	40	42			19.4	8.5	15.8	6.7	13	1	506.35
92126	50	50	54			22.1	9.6	15.8	7.5	13	1	675.13
92127	65	65	76.1	70	9	29.1	13.5	22.3	9.2	10	1	1068.98
92128	80	80	88.9	70	9	33.3	14.5	35.8	10.6	10	1	1575.30
92129	100	100	108	102	11	41.2	17.7	50	13.1	10	1	2700.47

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 311

Geberit Mapress CuNiFe ball valve with actuator lever and hose connector, flanged

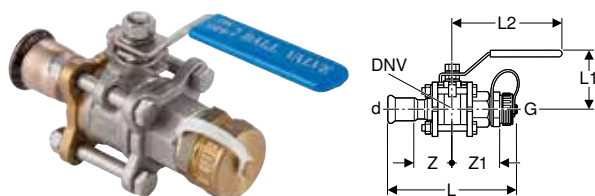

click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For grey and black water with pH value > 6.0
- For seawater
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Threaded nipple made of brass, with screw cap
- Valve made of CrNiMo steel
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DNV	d, ø [mm]	G ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92132	20	20	22	1	13.6	5.6	10.3	4.5	4.2	13	1	330.82

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 311

Actuator lever set, lockable, for Geberit Mapress ball valve, flanged



click & scan

Technical data

Product material	Stainless steel
------------------	-----------------

Scope of delivery


- Lever
- Washer
- Nut

Art. no.	DNV	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
90775	15	18	9.3	1	16.58
90776	20	22	10.3	1	22.24
90778	25 / 32	28 / 35	12.8	1	29.60
90779	40 / 50	42 / 54	15.8	1	47.99
90780	65	76.1	22.3	1	85.56
90781	80	88.9	35.8	1	85.56
90783	100	108	50	1	127.19



With Mapress pressing connections, FKM, blue

Geberit Mapress Stainless Steel ball valve with actuator lever, flanged (FKM, blue)

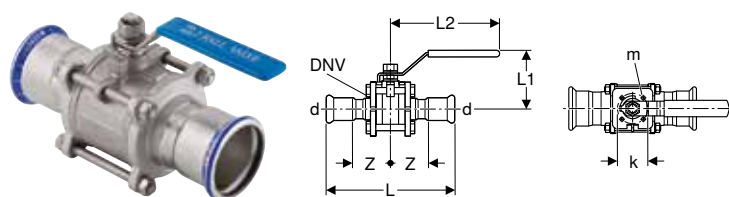

click & scan

Application purposes

- For compressed air (oil purity class 0–4)

Technical data

Operating temperature	-25 – +180 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Characteristics

- Pressing socket with black protection plug
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfills requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for d = 76.1–108 mm)
- Length-adjustable actuator lever (only for d = 108 mm)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of FKM, blue

Art. no.	DN	DNV	d, ø [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
50780	12	15	15			12.2	5	9.3	4.1	16	1	111.73
50782	20	20	22			13.3	5.6	10.3	4.5	16	1	156.19
50783	25	25	28			14.2	6.6	12.8	4.8	16	1	200.32
50784	32	32	35			17	7.5	12.8	5.9	16	1	245.10
50785	40	40	42			19.4	8.5	15.8	6.7	16	1	334.73
50786	50	50	54			22.1	9.6	15.8	7.5	16	1	449.31
50787	65	65	76.1	70	9	29.1	13.5	22.3	9.2	16	1	864.40
50788	80	80	88.9	70	9	33.3	14.5	35.8	10.6	16	1	1261.67
50789	100	100	108	102	11	41.2	17.7	50	13.1	16	1	2176.07

To order additionally

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 311

Actuator lever set, lockable, for Geberit Mapress ball valve, flanged



click & scan

Technical data

Product material	Stainless steel
------------------	-----------------

Scope of delivery


- Lever
- Washer
- Nut

Art. no.	DNV	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
90775	15	18	9.3	1	16.58
90776	20	22	10.3	1	22.24
90778	25 / 32	28 / 35	12.8	1	29.60
90779	40 / 50	42 / 54	15.8	1	47.99
90780	65	76.1	22.3	1	85.56
90781	80	88.9	35.8	1	85.56
90783	100	108	50	1	127.19

Ball valves for concealed installation

With FlowFit pressing connections

Geberit FlowFit concealed ball valve with insulation



click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For solid and drywall construction

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
Material, insulation	EPP
Insulation thickness	10 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Characteristics


- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Fastening points for circular hole ø 60 mm
- Replaceable valve top with ball and seals
- With concealed turn handle actuation
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Concealed turn handle actuation
- Spindle extension
- Round protection box, can be shortened
- Protection cover plug with marking tip

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	K [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.870.00.1	12	8	16	11.9	12.5	2.7	7.3	10	10	1	62.12

Geberit FlowFit concealed ball valve



click & scan

Application purposes

- Application overview – Geberit FlowFit → p. 243

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------


Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	Colour / surface	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.860.21.5	gloss chrome-plated	12	8	16	11.8	7.5	2.7	10	10	1	33.34
619.861.21.5	gloss chrome-plated	15	15	20	12.1	7.7	2.8	10	10	1	37.94
619.862.21.5	gloss chrome-plated	20	15	25	12.1	7.7	2.8	10	10	1	47.13

With Compact connections

Geberit Compact concealed ball valve

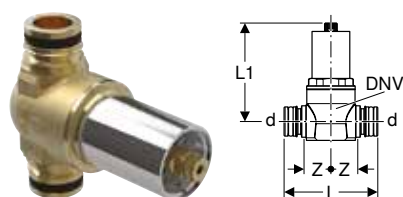

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Operating temperature	0–95 °C
Product material	Brass CW617N


Characteristics

- Approval in accordance with DVGW
- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- O-ring made of EPDM

Art. no.	Colour / surface	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
612.012.21.5	gloss chrome-plated	15	15	21	6.8	10.3	2	10	10	1	27.46

With Mapress pressing connections

Geberit Mapress concealed ball valve

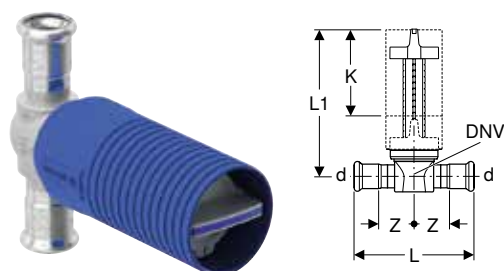

click & scan

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Operating temperature	0–95 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Replaceable valve top with ball and seals
- With concealed turn handle actuation
- Base unit made of stainless steel
- Upper part made of gunmetal
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery


- Concealed turn handle actuation
- Spindle extension
- Round protection box, can be shortened
- Protection cover plug with marking tip

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	K [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94912	12	15	15	10.4	12.6	3.2	7.3	10	1	119.17
94913	15	15	18	10.3	12.6	3.2	7.3	10	1	121.96
94914	20	20	22	11.7	12.6	3.8	7.3	10	1	152.25

Non-return valves

With Mapress pressing connections

Geberit Mapress Stainless Steel non-return valve, flanged



click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water $\leq 120^\circ\text{C}$
- For service water and process water
- For treated water (application range according to Technical Information "Treated water")
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)

Characteristics

- Valve seal made of PTFE
- Section seal of flange made of PTFE
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Operating temperature	-20 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92140	12	15	15	11.1	3.8	40	1	177.42
92142	20	20	22	12	3.9	40	1	222.78
92143	25	25	28	12.6	4	16	1	268.16
92144	32	32	35	14.7	4.8	16	1	330.08
92145	40	40	42	16.7	5.3	16	1	391.97
92146	50	50	54	18.5	5.8	16	1	606.49
92147	65	65	76.1	25.5	7.5	16	1	1072.72
92148	80	80	88.9	28.5	8.3	16	1	1588.47
92149	100	100	108	34.6	9.8	16	1	2186.71



Geberit Mapress CuNiFe non-return valve, flanged



click & scan

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For grey and black water with pH value > 6.0
- For seawater
- For extinguishing water (wet)

Technical data

Operating temperature	-20 – +120 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Characteristics

- Valve made of CrNiMo steel
- Valve seal made of PTFE
- Section seal of flange made of PTFE
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	DNV	d, ø [mm]	L [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92150	12	15	15	11.1	3.8	13	1	406.45
92152	20	20	22	12	3.9	13	1	510.43
92153	25	25	28	12.6	4	13	1	614.37
92154	32	32	35	14.7	4.8	13	1	567.09
92155	40	40	42	16.7	5.3	13	1	673.48
92156	50	50	54	18.5	5.8	13	1	1042.08
92157	65	65	76.1	25.5	7.5	10	1	1535.93
92158	80	80	88.9	28.5	8.3	10	1	2274.33
92159	100	100	108	34.6	9.8	10	1	3130.85





Tools

Preliminary Remarks.....	322
Pressing tools	324
Pressing tools compatibility [1]	324
Pressing tools compatibility [2]	325
Pressing tools compatibility [2XL]	327
Tools for Geberit Mapress.....	329
Assortment overview – Geberit Mapress compatibility [1], [2], [3], [2XL] and [HCP]	329
Assortment overview – Geberit pressing collars	331
Pressing tools compatibility [1]	332
Pressing tools compatibility [2]	334
Pressing tools compatibility [1] / [2]	337
Pressing tools compatibility [2XL]	337
Pressing tools compatibility [3]	339
Pipe processing tools	340
Pressure test plugs	342
Test equipment	343
Accessories	343
Tools for Geberit FlowFit.....	344
Assortment overview – Geberit FlowFit compatibility [1] and [2]	344
Hand-operated pressing tools	346
Pressing tools compatibility [1]	346
Pressing tools compatibility [2]	348
Pipe working tools	350
Pressure test plugs	354
Test equipment	355
Pressing tools with tools	356
Accessories	356
Universal cases.....	360
Universal cases	360



Preliminary Remarks

The base element for the pressed joint is a pressfitting designed for plastic shaping. A seal ring has been inserted in the crimp shaped ends of the pressfitting ex works.

Pressing operation

The pressfitting and system pipe are pressed on two planes:

Strength plane

The pressfitting and the system pipe are shaped. The mechanical strength of the connection is thereby achieved.

Tightness plane

The seal ring is shaped when the socket end is pressed. The elastic resilience of the seal ring ensures permanent tightness of the connection.

Simple

Simple connection technology



Pressed joint before pressing




Pressed joint after pressing

Pressing contour


The press connection is established with Geberit Mapress pressing jaws or pressing collars depending on the pipe dimension. This results in different pressing contours.

The pipe dimensions d12-35 are normally pressed with pressing jaws. If pressing jaws are used, a hexagonal pressing contour is formed.

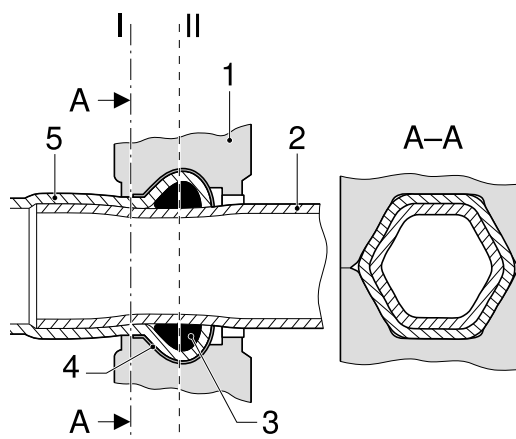

- I Strength plane
- II Tightness plane
- 1 Pressing jaw
- 2 System pipe
- 3 Seal ring
- 4 Pressing indicator
- 5 Pressfitting

The pipe dimensions d42-108 are pressed with pressing collars and the corresponding adapters for pressing collars. When using pressing collars, a pressing contour referred to as a lemon-shaped contour is formed.

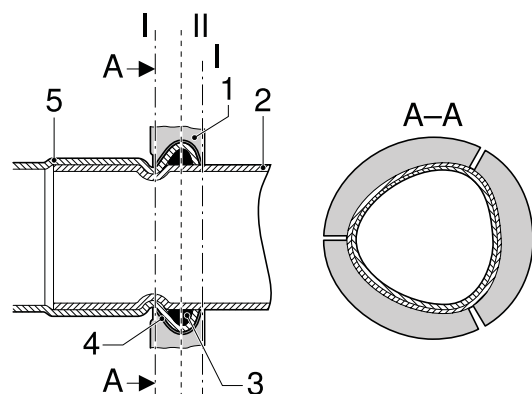

- | | |
|----|--------------------|
| I | Strength plane |
| II | Tightness plane |
| 1 | Pressing jaw |
| 2 | System pipe |
| 3 | Seal ring |
| 4 | Pressing indicator |
| 5 | Pressfitting |

The fitting beads are provided with a pressing indicator at the factory. The pressing indicator has the following functions:

- Indicates to the plumber before the pressure test that there are unpressed connections
- Displays the dimensions of the fitting in unpressed status
- Colour indicates the type of product material concerned
- Clearly identifies the fitting as a Geberit product

The pressing indicator is destroyed by the pressing sequence and is subsequently removed by the fitter.

Geberit Mapress is characterised by the following features:

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Hygienic

Meets the requirements of DVGW W 270 regarding microbiological safety

Experienced

More than 30 years of practical experience in pressing technology

Can be processed down to -20 °C

Can also be installed at low temperatures



Tools

Pressing tools
Pressing tools compatibility [1]

Pressing tools

Pressing tools compatibility [1]

Geberit ACO 103plus pressing tool [1], 230 V, in case



click & scan

Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	19 kN
Protection degree	IP20
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	12 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	75.5 dB(A)
Sound power level max.	86.5 dB(A)
Vibration emission value max.	2.5 m/s ²

Characteristics

- Geberit compatibility [1]
- LED pressing point light
- With Bluetooth® interface for the NovoCheck app
- Head rotating
- Hydraulic

Scope of delivery

- Battery-operated pressing tool [1], 12 V DC
- Battery charger
- Cleaning agents and lubricants
- 2 lithium-ion batteries, 12 V / 2 Ah
- Case

Art. no.	Compatibility	Protection class	Power consumption [W]	Plug type	Main element weight [kg]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
Valid for system: Geberit Mapress / Geberit Mepla								
691.017.P5.1	[1]	III	55	BS 1363 A	6.98	16	1	2301.06

Accessories

- Geberit carrying belt for case → p. 358

Geberit Li-ion battery 12 V



click & scan

Application purposes

- For ACO 103plus pressing tools
- For ACO 102 pressing tools

Technical data

Nominal voltage	12 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-10 – +50 °C

Art. no.	Battery capacity [Ah]	SU1 [pc.]	GBP/pc.
690.019.00.1	2	1	148.59

Geberit battery charger 12 V / 230 V



click & scan

Application purposes

- For lithium-ion batteries 12 V
- For ACO 103plus pressing tools
- For ACO 102 pressing tools

Technical data

Nominal voltage	220–240 V AC
Mains frequency	50 Hz / 60 Hz
Output voltage	12 V DC
Charging current	3 A

Art. no.	Power consumption [W]	Plug type	Battery charge time [min]	SU1 [pc.]	GBP/pc.
242.614.P5.1	55	BS 1363 A	30	1	216.26

Pressing tools compatibility [2]

Geberit MFP 2 hand-operated pressing tool [2]


[click & scan](#)

Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Operating temperature	-20 – +60 °C

Characteristics

- Geberit compatibility [2]
- Hydraulic

Scope of delivery

- Case

Art. no.	Compatibility	Main element weight [kg]	SU1 [pc.]	GBP/pc.
90523	[2]	5.26	1	1589.52

Geberit ACO 203plus pressing tool [2], 230 V, in case


[click & scan](#)

Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Protection degree	IP20
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	18 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	78 dB(A)
Sound power level max.	89 dB(A)
Vibration emission value max.	2.5 m/s ²

Characteristics

- Geberit compatibility [2]
- LED pressing point light
- With Bluetooth® interface for the NovoCheck app
- Hydraulic
- Brushless motor
- Case can be equipped with Geberit set of pressing jaws [2]

Scope of delivery

- Battery-operated pressing tool [2], 18 V DC
- Battery charger
- Cleaning agents and lubricants
- 2 lithium-ion rechargeable batteries, 18 V / 2 Ah
- Case

Art. no.	Compatibility	Protection class	Power consumption [W]	Plug type	Main element weight [kg]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
----------	---------------	------------------	--------------------------	-----------	-----------------------------	--------------	--------------	---------

Valid for system: Geberit Mapress / Geberit Mepla

691.218.P5.2	[2]	III	90	BS 1363 A	8.06	16	1	2800.44
--------------	-----	-----	----	-----------	------	----	---	---------

Accessories

- Geberit carrying belt for case → p. 358
- Geberit Li-ion battery 18 V → p. 324



Tools

Pressing tools
Pressing tools compatibility [2]

Geberit ACO 203plus pressing tool [2], 230 V, in case



click & scan

Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Protection degree	IP20
Nominal voltage	230 V AC
Operating voltage	18 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	78 dB(A)
Sound power level max.	89 dB(A)
Vibration emission value max.	2.5 m/s ²

Characteristics

- Geberit compatibility [2]
- LED pressing point light
- With Bluetooth® interface for the NovoCheck app
- Hydraulic
- Brushless motor
- Case can be equipped with Geberit set of pressing jaws [2]

Scope of delivery

- Battery-operated pressing tool [2], 18 V DC
- Battery charger
- Cleaning agents and lubricants
- 2 lithium-ion rechargeable batteries, 18 V / 5 Ah
- Case

Art. no.	Compatibility	Protection class	Power consumption [W]	Plug type	Main element weight [kg]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
Valid for system: Geberit Mapress / Geberit Mepla								
691.219.P5.2	[2]	III	90	BS 1363 A	9.739	16	1	2800.44

Accessories

- Geberit carrying belt for case → p. 358
- Geberit Li-ion battery 18 V → p. 324

Geberit Li-ion battery 18 V



click & scan

Application purposes

- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools

Technical data

Nominal voltage	18 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-10 – +50 °C

Characteristics

- State of charge display

Art. no.	Battery capacity [Ah]	SU1 [pc.]	GBP/pc.
690.589.00.1	2	1	219.44
690.600.00.1	5	1	652.43

Geberit battery charger 12 / 18 V, 230 V



click & scan

Application purposes

- For lithium-ion batteries 18 V
- For lithium-ion batteries 12 V
- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools
- For CP700G hydraulic power pack

Technical data

Nominal voltage	110–240 V AC
Mains frequency	50 Hz / 60 Hz
Output voltage	12 V DC / 18 V DC
Charging current	3 A

Art. no.	Power consumption [W]	Plug type	Battery charge time [min]	SU1 [pc.]	GBP/pc.
690.598.P5.1	90	BS 1363 A	40–75	1	255.66

Pressing tools compatibility [2XL]

Geberit ACO 203XLplus pressing tool [2], [2XL], 230 V, in case



click & scan

Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Protection degree	IP20
Nominal voltage	230 V AC
Mains frequency	50–60 Hz
Operating voltage	18 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	78 dB(A)
Sound power level max.	89 dB(A)
Vibration emission value max.	2.5 m/s ²

Characteristics

- Geberit compatibility [2]
- Geberit compatibility [2XL]
- Head rotating
- With Bluetooth® interface for the NovoCheck app
- Hydraulic
- Brushless motor

Scope of delivery

- Battery-operated pressing tool [2XL] 18 V DC
- Battery charger
- Cleaning agents and lubricants
- 2 lithium-ion rechargeable batteries, 18 V / 5 Ah
- Case

Art. no.	Compatibility	Protection class	Power consumption [W]	Plug type	Main element weight [kg]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
----------	---------------	------------------	--------------------------	-----------	-----------------------------	--------------	--------------	---------

Valid for system: Geberit Mapress / Geberit Mepla

691.229.P5.2	[2] / [2XL]	III	90	BS 1363 A	10.704	16	1	3792.34
--------------	-------------	-----	----	-----------	--------	----	---	---------

Accessories

- Geberit carrying belt for case → p. 358



Tools

Pressing tools
Pressing tools compatibility [2XL]

Geberit Li-ion battery 18 V



click & scan

Application purposes

- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools

Characteristics

- State of charge display

Technical data

Nominal voltage	18 V DC
Rechargeable battery type	lithium-ion battery
Operating temperature	-10 – +50 °C

Art. no.	Battery capacity [Ah]	SU1 [pc.]	GBP/pc.
690.589.00.1	2	1	219.44
690.600.00.1	5	1	652.43

Geberit battery charger 12 / 18 V, 230 V



click & scan

Application purposes

- For lithium-ion batteries 18 V
- For lithium-ion batteries 12 V
- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools
- For CP700G hydraulic power pack

Technical data



Nominal voltage	110–240 V AC
Mains frequency	50 Hz / 60 Hz
Output voltage	12 V DC / 18 V DC
Charging current	3 A

Art. no.	Power consumption [W]	Plug type	Battery charge time [min]	SU1 [pc.]	GBP/pc.
690.598.P5.1	90	BS 1363 A	40–75	1	255.66

Tools for Geberit Mapress

Assortment overview – Geberit Mapress compatibility [1], [2], [3], [2XL] and [HCP]

Geberit Great Britain, Version: December 2024










		Art. no.	Dimension
Compatibility [1]			
	Geberit ACO 103plus pressing tool [1], 230 V, in case	691.017.P5.1	
	Geberit Mapress set of pressing jaws [1]	690.190.00.1	12 mm 15 mm 18 mm 22 mm 28 mm 35 mm
		690.192.00.1	15 mm 18 mm 22 mm 28 mm 35 mm
		690.191.00.1	15 mm 18 mm 22 mm 28 mm
		690.193.00.1	15 mm 22 mm 28 mm 35 mm
		690.195.00.1	12 mm 15 mm 22 mm 28 mm 35 mm
	Geberit Mapress pressing jaw [1]	690.121.00.1	12 mm
		690.122.00.1	15 mm
		690.123.00.1	18 mm
		690.124.00.1	22 mm
		690.125.00.1	28 mm
		690.126.00.1	35 mm
	Geberit Mapress pressing ring, swivelling [1], in case	691.200.00.1	15 mm 18 mm 22 mm 28 mm 35 mm
	Geberit Mapress pressing ring, swivelling [1]/[2]	691.191.00.1	12 mm
		691.192.00.1	15 mm
		691.193.00.1	18 mm
		691.194.00.1	22 mm
		691.195.00.1	28 mm
		691.196.00.1	35 mm
	Geberit Mapress ZB 103S adapter jaw for pressing ring, swivelling [1]	691.198.00.1	12 mm 15 mm 18 mm 22 mm 28 mm 35 mm
Compatibility [2]			
	Geberit MFP 2 hand-operated pressing tool [2]	90523	
	Geberit ACO 203plus pressing tool [2], 230 V, in case	691.218.P5.2	









Tools

Tools for Geberit Mapress Pressing tools compatibility [2XL]

Geberit Great Britain, Version: December 2024

	Art. no.	Dimension
	690.230.00.1	12 mm
		15 mm
		18 mm
		22 mm
		28 mm
	690.231.00.1	15 mm
		18 mm
		22 mm
		28 mm
		35 mm
	690.232.00.1	15 mm
		18 mm
		22 mm
		28 mm
		35 mm
	690.233.00.1	15 mm
		22 mm
		28 mm
		35 mm
		35 mm
	690.235.00.1	12 mm
		15 mm
		22 mm
		28 mm
		35 mm
	690.221.00.1	12 mm
		15 mm
		18 mm
		22 mm
		28 mm
		35 mm
	691.197.00.1	15 mm
		18 mm
		22 mm
		28 mm
		35 mm
		35 mm
	691.191.00.1	12 mm
		15 mm
		18 mm
		22 mm
		28 mm
		35 mm
	691.296.00.2	42 mm
		54 mm
		54 mm
		54 mm
		54 mm
		54 mm
	691.297.00.3	42 mm
		54 mm
		66.7 mm
		66.7 mm
		66.7 mm
		66.7 mm
	691.181.00.1	35 mm
		42 mm
		54 mm
		54 mm
		54 mm
		54 mm
	691.185.00.3	66.7 mm
		66.7 mm
		66.7 mm
		66.7 mm
		66.7 mm
		66.7 mm
	691.203.00.1	35 mm
		42 mm
		50 mm
		54 mm
		63 mm
		66.7 mm
	691.203.00.1	75 mm
		75 mm
		75 mm
		75 mm
		75 mm
		75 mm

Geberit Great Britain, Version: December 2024



Compatibility [2XL]		Art. no.	Dimension
	Geberit ACO 203XLplus pressing tool [2], [2XL], 230 V, in case	691.229.P5.2	
	Geberit Mapress pressing collars [2XL], in case	691.188.00.1	76.1 mm 88.9 mm
	Geberit Mapress pressing collar [2XL], in case	691.189.00.1	108 mm
	Geberit Mapress pressing collar [2XL] / [3]	90797	76.1 mm
		90798	88.9 mm
		90799	108 mm
	Geberit Mapress ZB 221 adapter jaw [2XL]	691.186.00.1	76.1 mm 88.9 mm 108 mm
	Geberit Mapress ZB 222 adapter jaw [2XL]	691.187.00.1	108 mm



- For 66.7 mm Geberit Mapress copper material only, compatibility [2] can be used

Assortment overview – Geberit pressing collars

Geberit Great Britain, Version: December 2024

	Pressing collar, new - d76.1	Pressing collar, new - d88.9	Pressing collar, new - d108
			
	90797	90798	90799
Compatibility [2XL] - new			
691.186.00.1 Geberit Mapress ZB 221 adapter jaw [2XL] 	✓	✓	✓
691.187.00.1 Geberit Mapress ZB 222 adapter jaw [2XL] 			✓

✓ Compatible




Tools

Tools for Geberit Mapress
Pressing tools compatibility [1]

Pressing tools compatibility [1]

Geberit Mapress set of pressing jaws [1]



click & scan

Application purposes

- For technical building systems
- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [1]
- Pipe cutter
- Pipe deburrer
- Insertion distance template with marker pen
- PowerTest

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.190.00.1	[1]	12 / 15 / 18 / 22 / 28 / 35	1	1311.86
690.195.00.1	[1]	12 / 15 / 22 / 28 / 35	1	1150.51
690.191.00.1	[1]	15 / 18 / 22 / 28	1	995.71
690.192.00.1	[1]	15 / 18 / 22 / 28 / 35	1	1158.78
690.193.00.1	[1]	15 / 22 / 28 / 35	1	1010.90



- Fit into Geberit case with case insert from 10A-IV

Geberit Mapress pressing jaw [1]



click & scan

Application purposes

- For technical building systems
- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.121.00.1	[1]	12	1	206.99
690.122.00.1	[1]	15	1	211.14
690.123.00.1	[1]	18	1	215.27
690.124.00.1	[1]	22	1	220.77
690.125.00.1	[1]	28	1	224.94
690.126.00.1	[1]	35	1	230.46

Accessories

- Geberit PowerTest → p. 341
- Geberit ACO 103plus pressing tool [1], 230 V, in case → p. 322



- Fit into Geberit case with case insert from 10A-IV

Geberit Mapress ZB 103S adapter jaw for pressing ring, swivelling [1]



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [1]
- For pressing with Geberit Mapress swivelling pressing rings [1]/[2]
ø 12–35 mm

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.198.00.1	[1]	12 / 15 / 18 / 22 / 28 / 35	1	246.28

New

Geberit Mapress pressing ring, swivelling [1], in case



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Swivelling pressing rings [1]/[2]
- ZB 103S adaptor jaw for swivelling pressing ring [1]
- Cleaning agents and lubricants
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.200.00.1	[1]	15 / 18 / 22 / 28 / 35	1	1026.17

Available as of January 2025




Tools

Tools for Geberit Mapress
Pressing tools compatibility [2]

Pressing tools compatibility [2]

Geberit Mapress set of pressing jaws [2]



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [2]
- Pipe cutter
- Pipe deburrer
- Insertion distance template with marker pen
- PowerTest

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.230.00.1	[2]	12 / 15 / 18 / 22 / 28 / 35	1	1618.80
690.235.00.1	[2]	12 / 15 / 22 / 28 / 35	1	1376.04
690.231.00.1	[2]	15 / 18 / 22 / 28	1	1127.88
690.232.00.1	[2]	15 / 18 / 22 / 28 / 35	1	1386.82
690.233.00.1	[2]	15 / 22 / 28 / 35	1	1144.06

Accessories

- Geberit case for pressing jaws [2]/[3], with insert 10C-II, empty → p. 333



- Fit into Geberit case with case insert from 10C-II, 20A-V, 20B-IV, 20D-II
- Not suitable for Geberit pressing tools PWH 40

Geberit Mapress pressing jaw [2]



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.221.00.1	[2]	12	1	231.98
690.222.00.1	[2]	15	1	237.34
690.223.00.1	[2]	18	1	242.76
690.224.00.1	[2]	22	1	248.14
690.225.00.1	[2]	28	1	253.52
690.226.00.1	[2]	35	1	258.93

Accessories

- Geberit case for pressing jaws [2]/[3], with insert 10C-II, empty → p. 333
- Geberit PowerTest → p. 341



- Fit into Geberit case with case insert from 10C-II, 20A-V, 20B-IV, 20D-II
- Not suitable for Geberit pressing tools PWH 40

Geberit case for pressing jaws [2]/[3], with insert 10C-II, empty



[click & scan](#)

Characteristics

- Can be equipped with six Geberit Mepla pressing jaws [2]
- Can be equipped with six Geberit Mapress pressing jaws [2] or [3]
- Can be equipped with Geberit Mepla deburring and calibration tool $\varnothing$ 16–50 mm
- Can be equipped with a Geberit Mapress pipe deburrer $\varnothing$ 12–54 mm
- Can be equipped with a Geberit Mapress pipe cutter up to $\varnothing$ 50 mm or Geberit scissors
- Can be equipped with a Geberit Mapress pipe cutter up to $\varnothing$ 54 mm
- Can be equipped with a Geberit Mapress insertion distance template with marker pen
- Can be equipped with a 120 ml cleaning and lubricating agent
- Can be equipped with a Geberit grease pencil and a folding rule

Art. no.	Specification number	B [cm]	H [cm]	T [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
691.137.00.1	10C-II	52.4	38.3	17.4	24	1	132.36

Accessories

- Geberit carrying belt for case → p. 358

Geberit Mapress pressing ring, swivelling [2], in case



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Swivelling pressing rings [1]/[2]
- ZB 203S adaptor jaw for swivelling pressing ring [2]
- Cleaning agents and lubricants
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, $\varnothing$ [mm]	SU1 [pc.]	GBP/pc.
691.197.00.1	[2]	15 / 18 / 22 / 28 / 35	1	1098.00



Tools

Tools for Geberit Mapress
Pressing tools compatibility [2]

Geberit Mapress pressing collars [2], in case



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Pressing collars
- ZB 203A adaptor jaw [2]
- Cleaning agents and lubricants
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
691.296.00.2	[2]	42 / 54	24	1	2564.10
691.297.00.3	[2]	42 / 54 / 66.7		1	4062.50

Accessories

- Geberit carrying belt for case → p. 358



- Latest variant (691.297.00.3) collars suitable for pressing 66.7 mm Mapress Carbon Steel with [2] tools.
- Not suitable for Geberit pressing tools PWH 40

Geberit Mapress pressing collar [2], [3]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings
- Dimension ø 35 mm is exclusively suitable for pressing Geberit Mapress Stainless Steel and Carbon Steel for operating pressures up to 25 bar / 2500 kPa

Characteristics

- Pressable with ZB 203A adapter jaw [2]
- Pressable with ZB 203 adaptor jaw [2]
- Pressable with ZB 201 adaptor jaw [2], d35–54
- Pressable with ZB 303 adaptor jaw [3]

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.181.00.1	[2] / [3]	35	1	2076.12
691.182.00.1	[2] / [3]	42	1	1001.77
691.183.00.1	[2] / [3]	54	1	1001.77
691.185.00.3	[2] / [3]	66.7	1	1306.66

To order additionally

- Geberit ZB 203A adaptor jaw [2] → p. 334



- Latest variant 66.7 mm collar (691.185.00.3) is suitable for pressing 66.7 mm Mapress Carbon Steel with [2] tools.
- Not suitable for Geberit pressing tools PWH 40

Geberit ZB 203A adaptor jaw [2]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing with Geberit Mepla pressing collars [2] ø 63–75 mm
- For pressing with Geberit Mapress pressing collars [2] ø 35–66.7 mm

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.203.00.1	[2]	35 / 42 / 50 / 54 / 63 / 66.7 / 75	1	389.81



- Not suitable for Geberit pressing tools PWH 40

Pressing tools compatibility [1] / [2]

Geberit Mapress pressing ring, swivelling [1]/[2]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [1]/[2]
- For pressing Geberit Mapress pressfittings

Characteristics

- Can be pressed with ZB 103S adapter jaw for pressing ring, swivelling [1]
- Can be pressed with ZB 203S adapter jaw for pressing ring, swivelling [2]

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.191.00.1	[1] / [2]	12	1	164.18
691.192.00.1	[1] / [2]	15	1	164.18
691.193.00.1	[1] / [2]	18	1	184.71
691.194.00.1	[1] / [2]	22	1	184.71
691.195.00.1	[1] / [2]	28	1	215.50
691.196.00.1	[1] / [2]	35	1	215.50

Pressing tools compatibility [2XL]

Geberit Mapress pressing collars [2XL], in case



click & scan

Application purposes

- For ACO 203XL pressing tools
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Pressing collars
- ZB 221 adaptor jaw [2XL]
- Cleaning agents and lubricants
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.188.00.1	[2XL]	76.1 / 88.9	1	3559.95

Accessories

- Geberit carrying belt for case → p. 358



Tools

Tools for Geberit Mapress
Pressing tools compatibility [2XL]

Geberit Mapress pressing collar [2XL], in case



click & scan

Application purposes

- For ACO 203XL pressing tools
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Pressing collar, ø 108 mm
- ZB 222 adaptor jaw [2XL] for final pressing
- Cleaning agents and lubricants
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.189.00.1	[2XL]	108	1	2994.75

To order additionally

- Geberit Mapress ZB 221 adapter jaw [2XL] → p. 336

Accessories

- Geberit carrying belt for case → p. 358

Geberit Mapress pressing collar [2XL] / [3]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
90797	[2XL] / [3]	76.1	1	1111.12
90798	[2XL] / [3]	88.9	1	1256.32
90799	[2XL] / [3]	108	1	1811.11

To order additionally

- Geberit Mapress ZB 221 adapter jaw [2XL] → p. 336
- Geberit Mapress ZB 222 adapter jaw [2XL] → p. 337

Geberit Mapress ZB 221 adapter jaw [2XL]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For final pressing with Geberit Mapress pressing collars [2XL] / [3]
ø 76.1 und ø 88.9 mm
- For preliminary pressing of Geberit Mapress pressing collars
[2XL] / [3] ø 108 mm

Scope of delivery

- Case
- ZB 221 adaptor jaw [2XL]

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.186.00.1	[2XL]	76.1 / 88.9 / 108	1	997.73

Geberit Mapress ZB 222 adaptor jaw [2XL]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For final pressing with Geberit Mapress pressing collars [2XL] / [3]
ø 108 mm

Scope of delivery

- Case
- ZB 222 adaptor jaw [2XL] for final pressing

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.187.00.1	[2XL]	108	1	997.73

Pressing tools compatibility [3]

Geberit Mapress pressing collar [2], [3]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings
- Dimension ø 35 mm is exclusively suitable for pressing Geberit Mapress Stainless Steel and Carbon Steel for operating pressures up to 25 bar / 2500 kPa

Characteristics

- Pressable with ZB 203A adaptor jaw [2]
- Pressable with ZB 203 adaptor jaw [2]
- Pressable with ZB 201 adaptor jaw [2], d35–54
- Pressable with ZB 303 adaptor jaw [3]

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.181.00.1	[2] / [3]	35	1	2076.12
691.182.00.1	[2] / [3]	42	1	1001.77
691.183.00.1	[2] / [3]	54	1	1001.77
691.185.00.3	[2] / [3]	66.7	1	1306.66

To order additionally

- Geberit ZB 203A adaptor jaw [2] → p. 334



- Latest variant 66.7 mm collar (691.185.00.3) is suitable for pressing 66.7 mm Mapress Carbon Steel with [2] tools.
- Not suitable for Geberit pressing tools PWH 40



Tools

Tools for Geberit Mapress
Pipe processing tools

Geberit Mapress pressing collar [2XL] / [3]



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
90797	[2XL] / [3]	76.1	1	1111.12
90798	[2XL] / [3]	88.9	1	1256.32
90799	[2XL] / [3]	108	1	1811.11

To order additionally

- Geberit Mapress ZB 221 adapter jaw [2XL] → p. 336
- Geberit Mapress ZB 222 adapter jaw [2XL] → p. 337

Pipe processing tools

Geberit Mapress pipe cutter R



[click & scan](#)

Application purposes

- For cutting Geberit Mapress system pipes to length

Characteristics

- Spare cutting wheel in handle

Art. no.	d, ø [mm]	Model	SU1 [pc.]	GBP/pc.
91087	12–35	35S	1	133.69
91088	12–54	65S	1	179.50

Set of cutting wheels for Geberit Mapress pipe cutter R



[click & scan](#)

Scope of delivery

- 2 cutting wheels
- Axle

Art. no.	d, ø [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
91092	12–54	10	1	42.87

Geberit Mapress pipe deburrer



[click & scan](#)

Application purposes

- For deburring the inside and outside of Geberit Mapress system pipes
- For deburring the inside and outside of standard copper pipes

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
90357	12–35	1	35.72
90363	12–54	1	74.49

Cutter for Geberit Mapress RE 1 electric pipe deburrer



[click & scan](#)

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
90365	15–108	1	257.26

Geberit Mapress stripping tool



[click & scan](#)

Application purposes

- For removing the plastic jacketing from the insertion area on Geberit Mapress system pipes

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
90371	12	1	59.02
90372	15	1	59.02
90373	18	1	59.02
90374	22	1	59.02
90375	28	1	59.02

Geberit Mapress stripping tool



[click & scan](#)

Application purposes

- For removing the plastic jacketing from the insertion area on Geberit Mapress system pipes

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
90376	35 / 42 / 54	1	70.04


Blade for Geberit Mapress stripping tool



[click & scan](#)

Art. no.	d, ø [mm]	SU2 [pc.]	GBP/pc.
90391	12 / 15 / 18	10	5.68
90394	22 / 28	10	5.68
90396	35 / 42 / 54	10	5.68

Geberit Mapress insertion distance template with marker pen



[click & scan](#)

Application purposes

- For marking the insertion distance on Geberit Mapress system pipes

Art. no.	d, ø [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90351	12–108	10	1	8.11



Tools

Tools for Geberit Mapress
Pressure test plugs

Geberit Mapress marker pen



[click & scan](#)

Application purposes

- For Geberit Mapress insertion distance templates
- For marking the insertion distance on Geberit Mapress system pipes

Art. no.	Tip	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90358	rounded	50	5	3.23

Geberit Mapress assembly clamp MH 1



[click & scan](#)

Application purposes

- For fixing unpressed Geberit Mapress pipe/fitting joints

Art. no.	d, Ø [mm]	SU1 [pc.]	GBP/pc.
90563	54–108	1	461.80

Pressure test plugs

Geberit Mapress pressure test plug for fitting



[click & scan](#)

Application purposes

- For temporarily closing Geberit Mapress fittings during the pressure test
- For pressure tests with cold water up to 22.5 bar / 2250 kPa
- For pressure tests with air up to 3 bar / 300 kPa

Characteristics

- Reusable
- O-ring made of NBR, black
- Ø 15–22 mm without ventilation
- Ø 28–108 mm with ventilation
- Ø 42–54 mm with female thread G 1/2"
- Ø 76.1–108 mm with female thread G 3/4"

Art. no.	d, Ø [mm]	SU1 [pc.]	GBP/pc.
90922	15	1	65.78
90923	18	1	64.75
90924	22	1	69.89
90925	28	1	93.37
90926	35	1	100.89
90927	42	1	133.95
90928	54	1	171.85
90929	76.1	1	297.78
90930	88.9	1	363.90
90931	108	1	445.50

Seal for Geberit Mapress pressure test plug



[click & scan](#)

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
90341	15	1	2.13
90342	18	1	2.19
90343	22	1	2.26

Set of seals for Geberit Mapress pressure test plug



[click & scan](#)

Scope of delivery

- 2 seals

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
90344	28	1	2.83
90345	35	1	3.14
90346	42	1	3.85
90347	54	1	4.50
90348	76.1	1	24.30
90349	88.9	1	48.81
90350	108	1	69.99

Test equipment

Geberit PowerTest



[click & scan](#)

Application purposes

- For testing service-free Geberit pressing jaws
- For testing Geberit Mepla hand-operated pressing pliers and pressing jaws

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
690.493.00.1	50	10	4.90

Accessories

Kroon-Oil®



[click & scan](#)

Application purposes

- For cleaning and lubricating Geberit tools

Characteristics

- Silicone-free (LABS-free)

Art. no.	Content [ml]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
691.106.00.1	120	10	1	23.18

Geberit leak detection spray



click & scan

Application purposes

- For a dry leak test

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Art. no.	Content [ml]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	16.69





Tools for Geberit FlowFit

Assortment overview – Geberit FlowFit compatibility [1] and [2]

Geberit Great Britain, Version: December 2024

		Art. no.	Dimension
Hand-operated pressing pliers			
	Geberit FlowFit hand-operated pressing tools, in case	691.031.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
	Geberit FlowFit hand-operated pressing pliers	691.030.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
Compatibility [1]			
	ACO 103plus pressing tool with Geberit FlowFit tools [1]	655.104.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
	Geberit FlowFit pressing jaw [1], in case	655.081.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
	Geberit FlowFit case, equipped with tools [1]	655.078.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
	Geberit FlowFit set of pressing tools [1]	691.035.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
	Geberit FlowFit pressing jaw [1]	691.032.00.1	16 mm 20 mm 25 mm 32 mm 40 mm

Geberit Great Britain, Version: December 2024

		Art. no.	Dimension
Compatibility [2]			
	Geberit MFP 2 hand-operated pressing tool [2]	90523	
	Geberit ACO 203XLplus pressing tool [2], [2XL], 230 V, in case	691.229.P5.2	BS-1363A
	Geberit FlowFit pressing jaw [2], in case	655.082.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
		655.083.00.1	16 mm 20 mm 25 mm 32 mm 40 mm 50 mm 63 mm 75 mm
	Geberit FlowFit case, equipped with tools [2]	655.084.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
		655.079.00.1	16 mm 20 mm 25 mm 32 mm 40 mm 50 mm 63 mm 75 mm
	Geberit FlowFit case equipped with tools [2], with compartment for ECO 203/ACO 203 pressing tool	655.080.00.1	16 mm 20 mm 25 mm 32 mm 40 mm 50 mm 63 mm 75 mm
	Geberit FlowFit set of pressing tools [2]	691.036.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
		691.037.00.1	16 mm 20 mm 25 mm 32 mm 40 mm 50 mm 63 mm 75 mm
	Geberit FlowFit pressing jaw [2]	691.033.00.1	16 mm 20 mm 25 mm 32 mm 40 mm
		691.034.00.1	50 mm 63 mm 75 mm



Tools

Tools for Geberit FlowFit
Pressing tools compatibility [1]

Hand-operated pressing tools

Geberit FlowFit hand-operated pressing tools, in case



[click & scan](#)

Application purposes

- For pressing Geberit FlowFit pressfittings

Scope of delivery

- Hand-operated pressing pliers
- Scissors
- Pipe cutter
- PowerTest
- Calibration tool
- Cleaning agents and lubricants
- Grease pencil with retractable lead, yellow
- Case

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.031.00.1	16 / 20 / 25 / 32 / 40	1	566.82

Accessories

- Geberit FlowFit refill set for PowerTest → p. 353

Geberit FlowFit hand-operated pressing pliers



[click & scan](#)

Application purposes

- For pressing Geberit FlowFit pressfittings

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.030.00.1	16 / 20 / 25 / 32 / 40	1	317.39

Accessories

- Geberit FlowFit case for hand-operated pressing tool set → p. 354
- Geberit FlowFit PowerTest, in case → p. 353

Pressing tools compatibility [1]

Geberit FlowFit case, equipped with tools [1]



[click & scan](#)

Application purposes

- For pressing Geberit FlowFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Geberit FlowFit pressing jaws
- Scissors
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Calibration tool
- Collecting device for press indicators
- Case

Art. no.	Compatibility	d, ø [mm]	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
655.078.00.1	[1]	16 / 20 / 25 / 32 / 40	50.6	34.9	16	1	968.29

Geberit FlowFit set of pressing tools [1]



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [1]
- For pressing Geberit FlowFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [1]
- Scissors
- Pipe cutter
- PowerTest
- Calibration tool
- Grease pencil with retractable lead, yellow
- Collecting device for press indicators

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.035.00.1	[1]	16 / 20 / 25 / 32 / 40	1	725.51

Accessories

- Geberit FlowFit case for pressing tools ACO 103 [1] → p. 355
- Geberit FlowFit case for processing tools → p. 355



- Fit into Geberit case with case insert 10-O
- Art. no. 691.156.00.1, 691.153.00.1
- Fit in Geberit case with case insert 10-P
- Art. no.: 691.161.00.1

Geberit FlowFit pressing jaw [1]



[click & scan](#)

Application purposes

- For pressing tools with Geberit compatibility [1]
- For pressing Geberit FlowFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.032.00.1	[1]	16 / 20 / 25 / 32 / 40	1	453.46

Accessories

- Geberit FlowFit collecting device for pressing indicator → p. 357
- Geberit FlowFit bag for collecting device → p. 357
- Geberit FlowFit case for pressing tools ACO 103 [1] → p. 355
- Geberit FlowFit case for processing tools → p. 355
- Geberit FlowFit PowerTest, in case → p. 353



- Fit into Geberit case with case insert 10-O
- Art. no. 691.156.00.1, 691.153.00.1
- Fit in Geberit case with case insert 10-P
- Art. no.: 691.161.00.1



Tools

Tools for Geberit FlowFit
Pressing tools compatibility [2]

Geberit FlowFit pressing jaw [1], in case



[click & scan](#)

Application purposes

- For pressing Geberit FlowtFit pressfittings

Scope of delivery

- Pressing jaw
- Case

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
655.081.00.1	[1]	16 / 20 / 25 / 32 / 40	1	570.74

Pressing tools compatibility [2]

Geberit FlowFit case, equipped with tools [2]



[click & scan](#)

Application purposes

- For pressing Geberit FlowtFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaw
- Scissors
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Calibration tool
- Collecting device for press indicators
- Case

Art. no.	Compatibility	d, ø [mm]	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
655.079.00.1	[2]	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75	50.6	34.9	16	1	1931.87
655.084.00.1	[2]	16 / 20 / 25 / 32 / 40	50.6	34.9	16	1	902.00

Geberit FlowFit case equipped with tools [2], with compartment for ECO 203/ACO 203 pressing tool



click & scan

Application purposes

- For Geberit pressing tools
- For pressing Geberit FlowtFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning
- Suitable for ECO 203 or ACO 203 pressing tools [2]

Scope of delivery

- Pressing jaw
- Scissors
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Calibration tool
- Collecting device for press indicators
- Case

Art. no.	Compatibility	d, ø [mm]	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
655.080.00.1	[2]	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75	606	39.9	17.5	1	1841.01

Geberit FlowFit set of pressing tools [2]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit FlowtFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [2]
- Scissors
- Pipe cutter
- PowerTest
- Calibration tool
- Grease pencil with retractable lead, yellow
- Collecting device for press indicators

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.036.00.1	[2]	16 / 20 / 25 / 32 / 40	1	770.85
691.037.00.1	[2]	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75	1	1564.42

Accessories

- Geberit FlowFit case for processing tools → p. 355
- Geberit FlowFit case for pressing tools ECO 203 and ACO 203 [2] → p. 356
- Geberit FlowFit case for pressing tools EFP 203 [2] → p. 356



- Fit in Geberit case with case insert 10-P
- Art. no.: 691.161.00.1
- Fit into Geberit case with case insert 20-I and 20-J
- Art. no. 691.154.00.1, 691.155.00.1, 691.157.00.1, 691.158.00.1



Tools

Tools for Geberit FlowFit
Pipe working tools

Geberit FlowFit pressing jaw [2]



click & scan

Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit FlowFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.033.00.1	[2]	16 / 20 / 25 / 32 / 40	1	498.81
691.034.00.1	[2]	50 / 63 / 75	1	793.54

Accessories

- Geberit FlowFit case for processing tools → p. 355
- Geberit FlowFit case for pressing tools ECO 203 and ACO 203 [2] → p. 356
- Geberit FlowFit case for pressing tools EFP 203 [2] → p. 356



- Fit in Geberit case with case insert 10-P
- Art. no.: 691.161.00.1
- Fit into Geberit case with case insert 20-I and 20-J
- Art. no. 691.154.00.1, 691.155.00.1, 691.157.00.1, 691.158.00.1

Geberit FlowFit pressing jaw [2], in case



click & scan

Application purposes

- For pressing Geberit FlowFit pressfittings

Scope of delivery

- Pressing jaw
- Case

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
655.082.00.1	[2]	16 / 20 / 25 / 32 / 40	1	615.50
655.083.00.1	[2]	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75	1	1421.22

Pipe working tools

Geberit pliers



click & scan

Application purposes

- For cutting Geberit Mepla system pipes PB, system pipes ML and protective tubes to length
- For cutting Geberit Volex system pipes and protective tubes to length

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
650.921.00.2	14–26	1	124.92

Geberit cutting wheel set for pliers



[click & scan](#)

Scope of delivery

- Cutting wheel
- Bolt

Art. no.	d, ø [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.936.00.1	14–26	5	1	29.26

Geberit pipe cutter ML



[click & scan](#)

Application purposes

- For cutting Geberit system pipes ML
- For cutting Geberit Mepla system pipes, ML, to length
- For cutting Geberit Volex system pipes, ML, to length

Characteristics

- Spare cutting wheel in handle

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.112.00.1	16–50	1	98.78
690.115.00.1	32–75	1	186.22

Geberit set of cutting wheels for pipe cutter ML



[click & scan](#)

Scope of delivery

- 2 cutting wheels
- Axle

Art. no.	d, ø [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.111.00.1	16–75	10	1	19.61

Geberit FlowFit calibration tool



[click & scan](#)

Application purposes

- For calibrating Geberit system pipes ML

Art. no.	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
690.300.00.1	16 / 20 / 25 / 32 / 40	15.8	1	13.61
690.301.00.1	50 / 63 / 75	15.3	1	18.12



Geberit FlowFit case equipped with deburring and calibration tools

click & scan

Application purposes

- For deburring and calibrating third-party system pipes

Characteristics

- Can be equipped with Geberit FlowFit transitions to third-party systems

Scope of delivery

- Deburring and calibration tool for third-party systems, $\varnothing$ 16 mm x 2.0–2.2 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 20 mm x 2.0–2.2 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 20 mm x 2.8–2.9 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 25 mm x 2.5–2.7 mm / $\varnothing$ 26 mm x 3.0 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 25 mm x 3.5–3.7 mm
- Case

Art. no.	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
655.086.00.1	50.6	34.9	16	1	415.30

Geberit FlowFit case equipped with transitions to third-party systems

click & scan

Application purposes

- For use as an adapter from Geberit FlowFit to third-party systems
- For deburring and calibrating third-party system pipes

Scope of delivery

- 6 Geberit FlowFit adaptors to third-party system, $\varnothing$ 16 mm – $\varnothing$ 16 mm x 2.0–2.2 mm
- 6 Geberit FlowFit adaptors to third-party system, $\varnothing$ 20 mm – $\varnothing$ 20 mm x 2.0–2.25 mm
- 6 Geberit FlowFit adaptors to third-party system, $\varnothing$ 20 mm – $\varnothing$ 20 mm x 2.8–2.9 mm
- 2 Geberit FlowFit adaptors to third-party system, $\varnothing$ 25 mm – $\varnothing$ 25 mm x 2.5–2.7 mm
- 2 Geberit FlowFit adaptors to third-party system, $\varnothing$ 25 mm – $\varnothing$ 25 mm x 3.5–3.7 mm
- 2 Geberit FlowFit adaptors to third-party system, $\varnothing$ 25 mm – $\varnothing$ 26 mm x 3.0 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 16 mm x 2.0–2.2 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 20 mm x 2.0–2.2 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 20 mm x 2.8–2.9 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 25 mm x 2.5–2.7 mm / $\varnothing$ 26 mm x 3.0 mm
- Deburring and calibration tool for third-party systems, $\varnothing$ 25 mm x 3.5–3.7 mm
- Case

Art. no.	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
655.085.00.1	50.6	34.9	16	1	795.03

Geberit grease pencil with retractable lead



[click & scan](#)

Application purposes

- For marking on Geberit pipes

Characteristics

- Pressure pin with convenient one-hand operation
- Lead retractable for protection after use
- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.102.00.1	yellow	25	1	24.62

Accessories

- Geberit spare leads for grease pencil with retractable lead → p. 351

Geberit spare leads for grease pencil with retractable lead



[click & scan](#)

Characteristics

- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Scope of delivery

- Box with 12 spare leads

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.103.00.1	yellow	25	1	24.62

Geberit handheld bending tool, hydraulic, in case



[click & scan](#)

Application purposes

- For bending Geberit system pipes ML
- For bending Geberit Mepla system pipes, ML

Characteristics

- Bending die $\varnothing$ 26 mm suitable for system pipes ML $\varnothing$ 25 and 26 mm

Scope of delivery

- 4 bending cheeks, $\varnothing$ 16, 20, 26 and 32 mm
- 4 bending dies, $\varnothing$ 16, 20, 26 and 32 mm
- Grease pencil with retractable lead, yellow
- Tongs body
- Folding rule
- Case

Art. no.	d, $\varnothing$ [mm]	SU1 [pc.]	GBP/pc.
690.412.00.3	16 / 20 / 26 / 32	1	641.82

Accessories


- Geberit carrying belt for case → p. 358



Tools

Tools for Geberit FlowFit
Pressure test plugs

Geberit external bending spring ML



[click & scan](#)

Application purposes

- For bending Geberit system pipes ML
- For bending Geberit Mepla system pipes, ML
- For bending Geberit Volex system pipes, ML


Characteristics

- Zinc-plated

Art. no.	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
690.912.00.1	16	50	1	13.46
690.913.00.1	20	50	1	17.03

Pressure test plugs

Geberit pressure test plug for pipe end



[click & scan](#)

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For temporarily closing Geberit system pipe ML pipe ends during the pressure test
- For temporarily closing Geberit system pipe PB pipe ends during the pressure test
- For pressure tests with cold water up to 25 bar / 2500 kPa
- For pressure tests with air up to 3 bar / 300 kPa

Characteristics


- Reusable
- O-ring made of EPDM

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	d, ø [mm]	Rp ["]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.940.26.1	16	1/2		5	1	15.70
654.940.26.1	20	1/2	25	5	1	18.73
655.940.26.1	25	1/2	25	5	1	20.61

Geberit FlowFit pressure test plug for pipe end



[click & scan](#)

Application purposes

- For Geberit FlowFit
- For temporarily closing Geberit system pipe ML pipe ends during the pressure test
- For pressure tests with cold water up to 25 bar / 2500 kPa
- For pressure tests with air up to 3 bar / 300 kPa


Characteristics

- Reusable
- O-ring made of EPDM

Art. no.	d, ø [mm]	Rp ["]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
656.940.26.1	32	1/2	25	5	1	23.39
657.940.26.1	40	1/2			1	51.79
658.940.26.1	50	1/2			1	73.66
659.940.26.1	63	1/2			1	123.54

Test equipment

Geberit FlowFit refill set for PowerTest

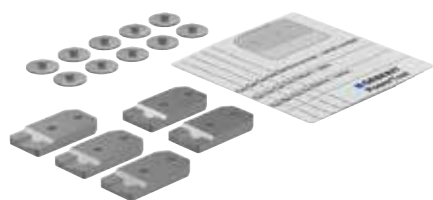

[click & scan](#)

Application purposes

- For refilling Geberit FlowFit PowerTest

Scope of delivery

- 5 test units for PowerTest
- 5 PowerTest labels for test unit
- 10 holder for test unit

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.917.00.1	16 / 20 / 25 / 32 / 40	1	15.86
690.918.00.1	50 / 63 / 75	1	18.12

Geberit FlowFit PowerTest, in case



[click & scan](#)

Application purposes

- For testing Geberit FlowFit hand-operated pressing pliers and pressing jaws

Scope of delivery

- Support for PowerTest
- 5 test units for PowerTest
- 5 PowerTest labels for test unit
- 10 holder for test unit
- Case

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.915.00.1	16 / 20 / 25 / 32 / 40	1	34.04
690.916.00.1	50 / 63 / 75	1	40.80

Accessories

- Geberit FlowFit refill set for PowerTest → p. 353
- Geberit FlowFit support for PowerTest → p. 353

Geberit FlowFit support for PowerTest



[click & scan](#)

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.937.00.1	16 / 20 / 25 / 32 / 40	1	4.55
690.938.00.1	50 / 63 / 75	1	6.81



Tools

Tools for Geberit FlowFit
Accessories

Pressing tools with tools

ACO 103plus pressing tool with Geberit FlowFit tools [1]



[click & scan](#)

Technical data

Nominal voltage	230 V AC
Mains frequency	50 Hz / 60 Hz

Art. no.	Compatibility	d, ø [mm]	Power consumption [W]	Plug type	SU1 [pc.]	GBP/pc.
655.104.00.1	[1]	16 / 20 / 25 / 32 / 40	55	CEE 7/16	1	2605.53

Accessories

Geberit FlowFit case for hand-operated pressing tool set



[click & scan](#)

Characteristics

- Can be equipped with Geberit FlowFit hand-operated pressing pliers ø 16–40 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 16–40 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 16–40 mm
- Can be equipped with Geberit pliers
- Can be equipped with Geberit pipe cutter up to ø 50 mm
- Can be equipped with a 120 ml cleaning and lubricating agent
- Can be equipped with Geberit grease pencil

Art. no.	Specification number	d, ø [mm]	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
691.152.00.1	10-N	16 / 20 / 26	50.6	34.9	16	1	118.27

Geberit FlowFit case for processing tools



click & scan

Characteristics

- Can be equipped with a Geberit FlowFit pressing jaw [1] or [2] ø 16–40 mm
- Can be equipped with a Geberit FlowFit pressing jaw [2] ø 50–75 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 16–40 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 50–75 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 16–40 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 50–75 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 16–40 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 50–75 mm
- Can be equipped with Geberit pliers
- Can be equipped with Geberit pipe cutter up to ø 50 mm
- Can be equipped with Geberit pipe cutter up to ø 75 mm
- Can be equipped with a 120 ml cleaning and lubricating agent
- Can be equipped with Geberit grease pencil

Art. no.	Specification number	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
691.161.00.1	10-P	50.6	34.9	16	1	117.42

Geberit FlowFit case for pressing tools ACO 103 [1]



click & scan

Characteristics

- Can be equipped with Geberit FlowFit pressing jaw [1]
- Can be equipped with a Geberit FlowFit calibration tool ø 16–40 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 16–40 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 16–40 mm
- Can be equipped with ACO 103plus pressing tool [1]
- Can be equipped with a Geberit 12 V battery charger or a Geberit 12/18 V battery charger
- Can be equipped with Li-ion battery 12 V
- Can be equipped with Geberit pliers
- Can be equipped with Geberit pipe cutter up to ø 50 mm
- Can be equipped with a 120 ml cleaning and lubricating agent
- Can be equipped with Geberit grease pencil

Art. no.	Specification number	Compatibility	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
691.153.00.1	10-O	[1]	50.6	34.9	16	1	118.27



Geberit FlowFit case for pressing tools ECO 203 and ACO 203 [2]

click & scan

Characteristics

- Can be equipped with a Geberit FlowFit pressing jaw [2] ø 16–40 mm
- Can be equipped with a Geberit FlowFit pressing jaw [2] ø 50–75 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 16–40 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 50–75 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 16–40 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 50–75 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 16–40 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 50–75 mm
- Can be equipped with a ACO 203plus or a ECO 203plus pressing tool [2]
- Can be equipped with a Geberit 18 V battery charger or a Geberit 12/18 V battery charger
- Can be equipped with Li-ion battery 12 V
- Can be equipped with Geberit pliers
- Can be equipped with Geberit pipe cutter up to ø 50 mm
- Can be equipped with Geberit pipe cutter up to ø 75 mm
- Can be equipped with a 120 ml cleaning and lubricating agent
- Can be equipped with Geberit grease pencil

Art. no.	Specification number	Compatibility	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
691.154.00.1	20-I	[2]	60.6	39.9	17.5	1	135.94

Geberit FlowFit case for pressing tools EFP 203 [2]

click & scan

Characteristics

- Can be equipped with a Geberit FlowFit pressing jaw [2] ø 16–40 mm
- Can be equipped with a Geberit FlowFit pressing jaw [2] ø 50–75 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 16–40 mm
- Can be equipped with a Geberit FlowFit calibration tool ø 50–75 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 16–40 mm
- Can be equipped with a Geberit FlowFit PowerTest ø 50–75 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 16–40 mm
- Can be equipped with a Geberit FlowFit collecting device for pressing indicators ø 50–75 mm
- Can be equipped with EFP 203 pressing tool [2]
- Can be equipped with Geberit pliers
- Can be equipped with Geberit pipe cutter up to ø 50 mm
- Can be equipped with Geberit pipe cutter up to ø 75 mm
- Can be equipped with a 120 ml cleaning and lubricating agent
- Can be equipped with Geberit grease pencil

Art. no.	Specification number	Compatibility	B [cm]	H [cm]	T [cm]	SU1 [pc.]	GBP/pc.
691.155.00.1	20-J	[2]	60.6	39.9	17.5	1	135.94

Geberit FlowFit collecting device for pressing indicator



[click & scan](#)

Application purposes

- For collecting pressing indicators
- For fastening Geberit FlowFit pressing jaws
- Not suitable for Geberit FlowFit hand-operated pressing pliers

Scope of delivery

- 2 brackets
- Bag
- Cover

Characteristics

- Magnet holder
- Bag capacity up to 200 pressing indicators (pressing jaw compatibility [1])
- Bag capacity up to 50 pressing indicators (pressing jaw compatibility [2])
- Collecting pressing indicators during pressing
- Bag with lateral zip for easy emptying

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.940.00.1	16 / 20 / 25 / 32 / 40	1	15.86
690.941.00.1	50 / 63 / 75	1	18.12

Geberit FlowFit bag for collecting device



[click & scan](#)

Application purposes

- For fastening collecting devices for pressing indicators

Art. no.	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.930.00.1	5	1	6.81

Kroon-Oil®



[click & scan](#)

Application purposes

- For cleaning and lubricating Geberit tools

Characteristics

- Silicone-free (LABS-free)

Art. no.	Content [ml]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
691.106.00.1	120	10	1	23.18



Tools

Universal cases
Universal cases

Geberit leak detection spray



click & scan

Application purposes

- For a dry leak test

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Art. no.	Content [ml]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	16.69

Universal cases

Universal cases

Geberit carrying belt for case



click & scan

Art. no.	SU1 [pc.]	GBP/pc.
691.129.00.1	1	21.73



Appendix

Abbreviation.....362

Sales and delivery conditions.....363

Index366



Abbreviation

Abbreviation	Designation
I1	length, partial dimension (cm)
L2	length (cm)
I2	length, partial dimension (cm)
L3	length (cm)
I3	length, partial dimension (cm)
La	linear expansion (cm)
IK	grip length, screw (cm)
M	metric thread (mm)
m	bolt hole diameter (cm)
n	number of bolts, flange connection (PC)
PN	nominal pressure (bar)
R	taper external thread (")
r	radius (cm)
DN	nominal width
R1	taper external thread (")
Rg	round thread (")
Rp	taper internal pipe thread (")
Rp1	taper internal pipe thread (")
Rp2	taper internal pipe thread (")
S	pipe series
s	wall thickness (mm)
s1	wall thickness (mm)
SW	spanner width (mm)
A	projection (cm)
s ISO	wall thickness (for labels) (mm)
a	partial dimension (cm)
A1	projection (cm)
V	measuring range, volumetric flow rate (l/min)
a1	partial dimension (cm)
AB	connection area (mm)
AB1	connection area (mm)
AB2	connection area (mm)
Acm ²	clear cross-sectional area (cm ²)
AD	connecting distance (cm)
arc	angle (°)
AD1	connecting distance (cm)
B	width (cm)
b	partial dimension (cm)
B1	width (cm)
c	flange hole diameter (mm)
d, ø	outer diameter (mm)
UNC	inch thread
D	outer diameter (cm)
d1, ø	outer diameter (mm)

Abbreviation	Designation
D1	outer diameter (cm)
d2, ø	outer diameter (mm)
d3, ø	outer diameter (mm)
da	outer pipe diameter (mm)
di, ø	inner diameter (mm)
DN/OD	nominal width
DN	nominal width
E	insertion depth (cm)
E1	insertion depth (cm)
G	pipe thread (")
G1	pipe thread (")
X	leg length / L-dimension (cm)
X1	leg length / L-dimension (cm)
G2	pipe thread (")
X2	leg length / L-dimension (cm)
H	height (cm)
X3	leg length / L-dimension (cm)
h	height, partial dimension (cm)
H1	height (cm)
X4	leg length / L-dimension (cm)
h1	height, partial dimension (cm)
X5	leg length / L-dimension (cm)
h2	height, partial dimension (cm)
h3	height, partial dimension (cm)
k	flange, diameter of bolt circle (cm)
X6	leg length / L-dimension (cm)
Z	Z-dimension (cm)
Z1	Z-dimension (cm)
Z2	Z-dimension (cm)
Z3	Z-dimension (cm)
Z4	Z-dimension (cm)
K	maximum cutting (cm)
Z5	Z-dimension (cm)
K1	maximum cutting (cm)
Z6	Z-dimension (cm)
K2	maximum cutting (cm)
K3	maximum cutting (cm)
KL	cable length (cm)
L	length (cm)
I	length, partial dimension (cm)
L	L / length (m)
L1	length (cm)

Sales and delivery conditions

GENERAL

1. In these Conditions of Sale "The Company" means Geberit Sales Ltd "the Customer" means the person, firm or company with whom The Company contracts. "The Contract" Any contract between The Company and the Customer for the sale and purchase of the Goods incorporating the Conditions (including any part or parts of them). "The Goods" Any Goods agreed in the Contract to be supplied to the Customer by The Company (including any part or parts of them).
2. These Conditions of Sale apply to and govern any contract between The Company and the Customer to the exclusion of any other conditions contained on, or in, any letter, order form, receipt of similar document emanating from the Customer. No variation of these Conditions of Sale shall be effective unless expressly agreed by The Company in writing.
3. (a) All quotations are for information only and are not to be considered as an offer by The Company. No Contract shall come into existence until an order by the Customer has been accepted by The Company.
(b) Acceptance by The Company of any order shall be on the basis that Goods will be invoiced at the prices contained in The Company's price list current at the date of despatch unless otherwise agreed in writing by The Company.
4. (a) Except where otherwise stated in the contract or in The Company's current price list all prices include the cost of packaging and delivery (but not installation). The Company reserves the right to make additional charges if the Customer requires a method of packaging or delivery different from that normally employed by The Company.
(b) The Customer shall, in addition to the net purchase price, pay to The Company the amount of any Value Added Tax or other sales tax at the rate in force at the time the Goods are invoiced.
5. **PAYMENT**
(a) All Goods will be invoiced at the time of, or soon after, despatch. Payment for the Goods must be received by The Company not later than the last day of the month following the date of the invoice. In the event of late payment, The Company reserves the right to charge interest at a rate of 2% per month.

(b) In the event of the Customer postponing delivery, or requesting that The Company suspend the manufacture of the Goods, or failing to give The Company sufficient information to enable it to process any order, the Customer shall pay any additional costs and expenses thereby incurred by The Company.

(c) Unless otherwise agreed in writing by The Company the Customer shall not be entitled to set off against any moneys due to The Company under the Contract any sums claimed by or due to the Customer from The Company under the Contract or any other Contract between The Company and the Customer.

6. ILLUSTRATION AND DIMENSIONS

- (a) All information and illustrations contained in brochures, catalogues, price lists, trade literature and advertising material produced by The Company are approximate only, intended to indicate only the general character of the Goods, and do not form any part of any contract between The Company and the Customer.
- (b) The dimensions of the Goods are subject to manufacturing tolerances customary within the trade. Dimensions contained in quotations, acknowledgements of orders, or catalogues, price lists, advertising matter and other trade literature are therefore approximate only.

7. SUBSTITUTED GOODS

The Company reserves the right to substitute Goods which are similar to the Goods ordered by the Customer provided that such substituted Goods are no less suitable for the purpose for which they are generally used than Goods ordered by the Customer.

DELIVERY

8. The Company cannot offer a timed delivery service, although we will try to meet the customer needs wherever possible. Any deliveries required outside our delivery schedule will be at the customer's expense.
9. Delivery shall be made to the Customer's premises only.
10. The Customer shall be responsible for unloading the Goods at the point of delivery.
11. The Customer will confirm the goods are received at the time of delivery by signing the Proof Of Delivery document (POD) providing a signature, date and printed name.
12. Immediately on collection or delivery, whichever is appropriate, the Customer shall examine the goods. Any shortages, damages or other delivery discrepancies must be notified directly to the Customer Support team in writing within three working days of delivery or collection. Credits will not be given if a POD has been signed and there have been no reported anomalies within 3 working days of the delivery date.
13. The Company will use its best endeavours to comply with any delivery date, however, collection or delivery dates and times indicated by the Company shall be regarded as best estimates only. The Company cannot be responsible for any loss or damage whatsoever caused by late delivery where circumstance beyond The Company's control have caused such delay.
14. The Company operates a minimum delivery value requirement for deliveries to the Customer's premises. This currently stands at £300.
15. Orders placed below the minimum order value will be subject to a £10 minimum order value charge.
16. Express orders should be placed before our cut offs for delivery the next day. These orders are subject to a carriage charge to the customer and will be priced based on weight.
17. **RETURNS**
The Company does not operate a returns policy for saleable stock or for stock that is defective or damaged upon receipt. Any agreed stock return is at the discretion of The Company and only with prior written consent. Where such consent is given, a handling charge of a minimum of 30% of invoiced value will be made.



18. RISK AND RETENTION OF OWNERSHIP

The risk in the Goods contracted to be sold by The Company shall pass to the Customer when the Goods are delivered to or collected by the Customer.

(a) Notwithstanding any passing of risk to the Customer, The Company retains ownership of the Goods the subject matter of this Contract the property in which shall not pass to the Customer and the Customer shall keep any Goods delivered to it as bailee for and on behalf of The Company until The Company has received full payment of the price of all Goods (whether or not the Goods are delivered in instalments and some have been paid for by the Customer).

(b) Until ownership of the Goods has passed to the Customer the Customer;

(i) shall insure the Goods against any loss or damage with an insurance office of repute.

(ii) shall store the Goods separately or in some other way ensure that they are readily identifiable as the property of The Company.

(iii) irrevocably authorise the representative of The Company at any time and from time to time (whether or not payment is due) to repossess the Goods and for such purpose to enter any premises occupied by the Customer or where the Goods are or are thought to be and to sever the Goods from anything to which they are attached without being responsible for any damage caused.

(iv) shall keep the Goods free from any charge, lien or other encumbrance.

(c) If, while under The Company's ownership, the Goods or any of them are processed or incorporated into other Goods ("the New Goods") then, provided the Goods remain a readily identifiable and removable part of the New Goods, the provisions of conditions (a) and (b) shall apply.

(d) The Company (acting on its own account, not as agent for the Customer) may sell or agree to sell any of the Goods or the New Goods in The Company's possession on such terms as it may in its sole discretion consider appropriate.

(e) The Company shall be entitled to a general lien over all Goods and materials of the Customer which is in The Company's possession or control from time to time for any sums due at any time whatsoever to The Company.

(f) Nothing in this condition shall confer any right upon the Customer to refuse or delay payment therefore.

19. LIMITATION OF LIABILITIES

(a) Goods may be delivered in cartons, bundles, returnable containers, loose or in other packaging. In any case where it is established to the satisfaction of The Company that the Goods have been damaged or lost (whether wholly or in part) in transit The Company will, at its own cost, repair or replace same provided that

(i) in the case of partial loss or damage, the Customer has returned to The Company's representative (or where the Goods have been delivered by a Carrier his representative) The Company's receipt note duly signed by the Customer's representative and indicating thereon as shortage of or damage to cartons, bundles, returnable containers, loose Goods or other such packages as shall make up the delivery and full particulars are notified directly to The Company in writing within three working days of delivery;

(ii) in the case of damage, the Goods and their packaging are retained by the Customer for inspection by The Company's representative. The Company will not be liable for any loss or damage in transit, except as above.

(b) Where it is established to the satisfaction of The Company

that Goods delivered by them or collected by the Customer, contain at the time of receipt by the Customer some defect in quality (not being a defect caused by some act or neglect of the Customer or a third party) and the Goods are returned to The Company at the Customer's expense within three months of despatch to the Customer, The Company will at its own cost repair or replace them (the choice being at The Company's option).

(c) Save as aforesaid and to the extent permitted by law The Company will not be liable to the Customer for any loss or damage whatsoever suffered as a result of a defect in quality or defective installation or the fact that the Goods are not fit for a particular purpose save for the conditions implied by section 12 of the Sale of Goods Act 1979 and without prejudice to the generality of the foregoing any implied term, condition or warranty statutory or otherwise as to the quality of the Goods sold or their fitness for any particular purpose or as to their correspondence with any description or sample is hereby excluded.

No warranty or representation given by or on behalf of The Company including without prejudice to the generality of the foregoing any advice as to the installation quantities use or performance of Goods supplied by The Company shall be binding upon The Company unless specifically stated in writing by The Company to be incorporated in the contract. Nothing in these Conditions excludes or limits the liability of The Company for death or personal injury caused by The Company's negligence or fraudulent misrepresentation.

20. CONSEQUENTIAL LOSS

Without prejudice to the generality of the foregoing provisions The Company shall not in any event be liable to the Customer for any indirect or consequential loss of or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise) costs, expenses or other claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the Contract.

21. INSOLVENCY AND BREACH OF CONTRACT

The Company shall have the option (without prejudice to any of its other rights against the Customer) by notice in writing to the Customer to rescind the contract or to suspend delivery in the following events:

(i) should any sum owing by the Customer to The Company be overdue.

(ii) should the Customer be in breach of any term of the contract with The Company.

(iii) should the Customer enter into any composition or arrangement with, or for the benefit of its creditors or have a receiving order in bankruptcy made against him or (if a body corporate) should it go into liquidation either voluntary or compulsory or under supervision or have a receiver and/or manager administrative receiver or administrator appointed over all or any part of its assets, or in Scotland should the Customer become notour bankrupt, or sequestrated, or a receiver, or judicial factor, or trustee is appointed, for any portion of the Customer's estate or effects or suffer any arrestment charge pending or other diligence to be issued or levied upon the Customer his estate or effects.

22. HEALTH AND SAFETY

As The Company is under a duty pursuant to S 6 of the Health and Safety at Work Act 1974 in respect of the design, manufacture and supply of any article for use at work, the Customer shall be deemed to have been afforded by The Company reasonable opportunity for the testing and examination of Goods or materials in respect of their safety and risk to health prior to delivery to the Customer, and he shall be deemed to have been afforded by The Company adequate information about the Goods and materials in respect of the use for which they are designed, and have been tested, and of any conditions necessary to ensure that when put to that use they will be safe and without risk to health, whether or not the said information has been requested by the Customer.

23. INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS

The Company is the proprietor or beneficial owners of patents, registered designs, trademarks and tradenames, copyright or other industrial or intellectual property rights relating to the Goods and The Company reserves all such rights to itself and no authorisation of licence is granted to the Customer to use the Goods or any drawing or specifications relating to the same provided to the Customer by The Company otherwise than for the purpose provided.

24. FORCE MAJEURE

The Company reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Customer (without liability to the Customer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Company including without limitation, acts of God, Governmental actions, war or national emergency, riot, civil commotion, fire, explosion, flood, epidemic, lock out, strikes or other labour disputes (whether or not relating to either party's workforce) or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate suitable materials.

25. WAIVER

Forbearance or indulgence by The Company shown or granted to the Customer whether in respect of these Conditions of Sale or otherwise, shall not affect or prejudice the rights of The Company against the Customer or be taken as a waiver of any of these Conditions of Sale.

26. GOVERNING LAW

Any contract incorporating these Conditions of Sale shall be governed by and construed in accordance with the laws of England and The Company and the Customer hereby agree to submit to the jurisdiction of the English Courts.

27. HEADNOTES

The head notes to these Conditions have been inserted for convenience and shall not affect their construction.

Geberit Sales Ltd
Geberit House, Edgehill Drive
Warwick, Warwickshire
CV34 6NH
Effective July 2018



Index

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
12412	125	20310	118	21007	120	21238	121
12413	125	20311	118	21008	120	21239	121
12414	125	20401	119	21009	120	21240	121
12415	125	20402	119	21010	120	21241	121
12416	125	20403	119	21011	120	21244	121
12417	125	20404	119	21012	120	21245	121
12418	125	20405	119	21101	121	21246	121
12419	125	20406	119	21103	121	21247	121
12420	125	20407	119	21104	121	21248	121
12421	125	20408	119	21105	121	21249	121
19201	112	20501	128	21107	121	21250	121
19202	112	20502	128	21121	123	21301	122
19203	112	20503	128	21122	123	21302	122
19204	112	20505	128	21123	123	21304	122
19205	112	20507	128	21127	123	21305	122
19206	112	20508	128	21128	123	21307	122
19207	112	20551	129	21130	123	21308	122
19208	112	20552	129	21131	123	21309	122
19402	113	20553	129	21133	123	21310	122
19404	113	20555	129	21134	123	21311	122
19405	113	20557	129	21201	121	21312	122
19406	113	20558	129	21202	121	21313	122
19407	113	20559	129	21203	121	21314	122
19408	113	20560	129	21204	121	21316	122
19409	113	20561	129	21205	121	21317	122
19410	113	20562	129	21206	121	21318	122
19411	113	20601	117	21207	121	21320	122
20101	117	20602	117	21208	121	21321	122
20102	117	20603	117	21209	121	21322	122
20103	117	20604	117	21210	121	21324	122
20104	117	20605	117	21211	121	21325	122
20105	117	20609	117	21212	121	21326	122
20109	117	20610	117	21213	121	21329	122
20110	117	20611	117	21214	121	21331	122
20111	117	20612	117	21215	121	21334	122
20112	117	20701	118	21216	121	21336	122
20211	135	20702	118	21217	121	21341	122
20212	135	20703	118	21218	121	21342	122
20213	135	20704	118	21219	121	21343	122
20214	135	20705	118	21220	121	21344	122
20215	135	20709	118	21221	121	21345	122
20216	135	20710	118	21222	121	21346	122
20217	135	20711	118	21223	121	21404	123
20218	135	20801	119	21224	121	21406	123
20219	135	20802	119	21225	121	21409	123
20220	135	20803	119	21226	121	21504	124
20221	135	20804	119	21229	121	21505	124
20222	135	20805	119	21230	121	21506	124
20301	118	21001	120	21231	121	21507	124
20302	118	21002	120	21232	121	21509	124
20303	118	21003	120	21233	121	21510	124
20304	118	21004	120	21234	121	21512	124
20305	118	21005	120	21236	121	21609	127
20309	118	21006	120	21237	121	21610	127

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
21611	127	21906	127	22111	115	23615	189
21612	127	21907	127	22112	115	23617	189
21613	127	21908	127	22301	116	23706	118
21615	127	21910	127	22302	116	23707	118
21618	127	21912	127	22303	116	23708	118
21659	128	21914	127	22304	116	23715	184
21660	128	21916	127	22305	116	23716	184
21661	128	21918	127	22306	116	23717	184
21662	128	21920	127	22307	116	23718	184
21700	125	21922	127	22308	116	23719	184
21701	125	21930	126	22309	116	23720	184
21702	125	21931	126	22310	116	23721	184
21703	125	21932	126	22311	116	23744	132
21704	125	21933	126	22312	116	23745	132
21705	125	21934	126	22313	116	23746	132
21707	125	21935	126	22315	116	23747	132
21708	125	21936	126	22316	116	23748	132
21709	125	21937	126	22317	116	23749	132
21710	125	21938	126	22318	116	23750	132
21711	125	21939	126	22320	116	23751	132
21712	125	21940	126	22321	116	23754	133
21713	125	22001	114	22322	116	23755	133
21714	125	22002	114	22323	116	23756	133
21715	125	22003	114	22324	116	23757	133
21716	125	22004	114	22327	116	23758	133
21717	125	22005	114	22330	116	23759	133
21719	125	22006	114	22331	116	23760	133
21720	125	22007	114	22332	116	23761	133
21721	125	22008	114	22338	116	23762	133
21722	125	22009	114	22339	116	23764	133
21724	125	22010	114	22345	116	23765	133
21725	125	22011	114	22346	116	23766	133
21727	125	22012	114	22348	116	23767	133
21800	126	22023	115	22349	116	23768	133
21801	126	22024	115	22421	36	23769	133
21802	126	22025	115	22422	36	23770	133
21803	126	22050	114	22423	36	23771	133
21804	126	22051	114	22431	36	23784	134
21805	126	22052	114	22432	36	23785	134
21806	126	22053	114	22433	36	23786	134
21807	126	22054	114	22444	36	23787	134
21808	126	22055	114	23106	117	23788	134
21809	126	22056	114	23107	117	23789	134
21810	126	22057	114	23108	117	23790	134
21811	126	22058	114	23306	118	23791	134
21814	126	22059	114	23307	118	23932	134
21818	126	22101	115	23308	118	23933	134
21820	126	22102	115	23509	128	23934	134
21823	126	22103	115	23510	128	23935	134
21824	126	22104	115	23511	128	23936	134
21827	126	22105	115	23602	138	23937	134
21901	127	22106	115	23603	138	23938	134
21902	127	22107	115	23604	138	23939	134
21903	127	22108	115	23606	117	23940	134
21904	127	22109	115	23607	117	23941	134
21905	127	22110	115	23608	117	24002	138



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
24003	138	29102	112	30873	18	31218	20
24004	138	29103	112	30874	18	31219	20
24005	189	29104	112	30875	18	31220	20
24006	189	29105	112	30876	18	31221	20
24007	189	29106	112	30877	18	31222	20
24045	139	29107	112	30878	18	31223	20
24046	139	29108	112	30892	18	31224	20
24047	139	29158	112	30893	18	31225	20
24055	190	29159	112	30894	18	31226	20
24056	190	29160	112	30905	18	31227	20
24057	190	29161	112	30906	18	31228	20
25032	131	30009	18	30907	18	31229	20
25033	131	30010	18	30908	18	31230	20
25034	131	30011	18	30932	18	31231	20
25035	131	30029	18	30933	18	31232	20
25036	131	30030	18	30934	18	31233	20
25037	131	30031	18	30935	18	31234	20
25038	131	30049	18	30936	18	31235	20
25040	131	30050	18	30937	18	31236	20
25042	131	30051	18	30938	18	31237	20
25044	131	30069	18	30942	18	31238	20
25045	131	30070	18	30943	18	31239	20
25046	131	30071	18	30944	18	31240	20
25048	131	30089	18	30955	18	31241	20
25049	131	30090	18	30956	18	31242	20
25050	131	30091	18	30957	18	31243	20
25051	131	30102	16	30958	18	31244	20
25052	131	30103	16	31002	20	31245	20
25053	131	30104	16	31003	20	31246	20
25054	131	30105	16	31004	20	31247	20
25055	131	30302	17	31005	20	31248	20
25300	130	30303	17	31006	20	31249	20
25302	130	30304	17	31007	20	31250	20
25304	130	30305	17	31008	20	31251	20
25305	130	30402	18	31009	20	31304	22
25306	130	30403	18	31010	20	31305	22
25307	130	30404	18	31011	20	31306	22
25308	130	30405	18	31106	16	31307	22
25309	130	30406	18	31107	16	31308	22
25319	129	30407	18	31108	16	31309	22
25320	129	30408	18	31109	16	31310	22
25321	129	30414	19	31110	16	31311	22
25322	129	30415	19	31111	16	31312	22
25323	129	30602	16	31204	20	31313	22
25324	129	30603	16	31206	20	31316	22
25325	129	30604	16	31207	20	31317	22
25326	129	30605	16	31208	20	31320	22
25329	130	30702	17	31209	20	31321	22
25330	130	30703	17	31210	20	31324	22
25332	130	30704	17	31211	20	31326	22
25335	130	30705	17	31212	20	31329	22
25337	130	30802	19	31213	20	31331	22
25338	130	30803	19	31214	20	31334	22
25339	130	30804	19	31215	20	31336	22
25340	130	30805	19	31216	20	31339	22
29101	112	30872	18	31217	20	31401	21

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
31454	21	31938	25	32339	15	33407	40
31455	21	31939	25	32345	15	33423	40
31458	21	31940	25	32346	15	33425	40
31461	21	32002	13	32348	15	33427	40
31464	21	32003	13	32412	22	33503	41
31703	24	32004	13	32413	22	33504	41
31704	24	32005	13	32414	22	33505	41
31705	24	32006	13	32415	22	33510	41
31707	24	32007	13	32416	22	33520	41
31708	24	32008	13	32417	22	33732	36
31709	24	32009	13	32418	22	33733	36
31710	24	32010	13	32419	22	33734	36
31711	24	32011	13	32420	22	33735	36
31713	24	32050	13	32421	22	33736	36
31714	24	32051	13	32606	16	33737	36
31715	24	32052	13	32607	16	33738	36
31716	24	32053	13	32608	16	33739	36
31717	24	32054	13	32609	16	33740	36
31718	24	32055	13	32610	16	33741	36
31719	24	32056	13	32611	16	33744	37
31720	24	32057	13	32706	17	33745	37
31721	24	32058	13	32707	17	33746	37
31722	24	32059	13	32708	17	33747	37
31724	24	32102	14	32709	17	33748	37
31726	24	32103	14	32710	17	33749	37
31731	25	32104	14	32711	17	33750	37
31732	25	32105	14	33001	13	33752	37
31733	25	32106	14	33002	15	33802	28
31734	25	32107	14	33003	15	33803	28
31735	25	32108	14	33004	15	33804	28
31736	25	32109	14	33005	20	33805	28
31737	25	32110	14	33006	20	33806	28
31738	25	32111	14	33007	20	33807	28
31801	26	32303	15	33008	20	33808	28
31802	26	32305	15	33009	24	33810	28
31803	26	32306	15	33010	26	33833	27
31804	26	32307	15	33013	40	33834	27
31805	26	32308	15	33203	28	33835	27
31806	26	32309	15	33212	39	33836	27
31807	26	32310	15	33213	39	33837	27
31809	26	32311	15	33214	39	33838	27
31811	26	32312	15	33215	39	33839	27
31814	26	32313	15	33216	39	33846	26
31818	26	32314	15	33217	39	33848	26
31819	26	32315	15	33218	39	33850	26
31820	26	32316	15	33219	39	33852	26
31821	26	32317	15	33220	39	33854	26
31822	26	32318	15	33221	39	33860	26
31823	26	32319	15	33306	17	33862	26
31824	26	32320	15	33307	17	33864	26
31825	26	32321	15	33308	17	33932	38
31826	26	32322	15	33309	17	33933	38
31932	25	32323	15	33310	17	33934	38
31933	25	32324	15	33311	17	33935	38
31936	25	32331	15	33403	40	33936	38
31937	25	32338	15	33405	40	33937	38



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
33938	38	34067	52	34136	60	34267	51
33939	38	34068	52	34137	60	34268	51
33940	38	34069	52	34138	60	34269	51
33941	38	34070	52	34139	60	34270	51
34000	46	34071	52	34140	50	34271	51
34001	46	34072	52	34141	50	34285	50
34002	46	34073	52	34142	52	34286	50
34003	46	34074	52	34143	52	34287	50
34007	47	34075	52	34144	54	34296	45
34008	47	34076	52	34145	54	34297	45
34009	47	34077	52	34146	54	34298	45
34010	47	34078	52	34147	54	34346	52
34014	46	34083	53	34148	54	34347	53
34015	46	34084	53	34149	54	34355	52
34016	46	34086	53	34150	54	34400	56
34017	46	34087	53	34151	54	34401	56
34021	47	34089	53	34152	54	34402	56
34022	47	34090	53	34153	54	34403	56
34023	47	34091	53	34154	54	34404	56
34024	47	34092	53	34158	56	34405	56
34028	50	34093	53	34159	56	34406	56
34029	50	34097	50	34161	56	34407	56
34030	50	34098	50	34162	44	34408	56
34031	50	34099	50	34169	53	34409	56
34032	50	34101	44	34170	53	34430	55
34033	50	34102	44	34187	46	34431	55
34034	50	34103	44	34188	46	34432	55
34035	50	34104	44	34189	46	34433	55
34036	50	34105	44	34190	47	34434	55
34037	50	34106	44	34191	47	34435	55
34038	50	34107	44	34192	47	34436	55
34039	50	34108	44	34193	46	34437	55
34040	50	34109	44	34194	46	34438	55
34041	50	34110	44	34195	46	34439	55
34042	50	34111	44	34196	47	34440	55
34043	50	34112	44	34197	47	34441	46
34044	50	34113	44	34198	47	34442	46
34045	50	34114	44	34204	57	34443	46
34046	50	34115	45	34205	57	34444	47
34047	50	34116	45	34206	57	34445	47
34048	50	34117	45	34207	57	34446	47
34049	50	34118	45	34208	57	34447	46
34050	50	34119	45	34209	57	34448	46
34051	50	34120	45	34210	57	34449	46
34052	51	34121	44	34211	57	34450	47
34053	51	34122	44	34212	58	34451	47
34054	51	34123	45	34214	57	34452	47
34055	51	34124	45	34248	44	34462	59
34056	51	34126	51	34249	44	34463	59
34057	51	34127	45	34250	44	34464	59
34058	51	34128	45	34259	45	34465	59
34059	51	34129	45	34260	45	34466	59
34060	51	34132	45	34261	45	34467	59
34061	51	34133	45	34264	51	34468	59
34063	51	34134	45	34265	51	34469	59
34066	52	34135	45	34266	51	34470	59

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
34471	59	34601	190	34729	197	35334	33
34500	192	34602	190	34730	197	35335	33
34501	192	34603	190	34731	199	35336	33
34502	192	34604	190	34732	199	35337	33
34503	192	34605	190	34733	199	35338	33
34504	192	34606	190	34735	195	35339	33
34505	192	34607	190	34736	195	35340	33
34506	192	34608	191	34737	195	35350	35
34507	192	34609	191	34738	195	35351	35
34508	192	34610	191	34739	195	35352	35
34509	192	34611	191	34740	195	35353	35
34510	192	34612	191	34752	198	35354	35
34511	192	34613	191	34753	198	35355	35
34512	192	34614	191	34754	198	35356	35
34513	192	34615	191	34755	198	35357	35
34514	192	34616	191	34756	198	35358	35
34515	192	34617	191	34757	198	35359	35
34516	192	34618	191	34758	198	35360	33
34517	192	34619	191	35032	32	35361	33
34518	192	34620	191	35033	32	35362	33
34519	192	34623	191	35034	32	35363	33
34520	192	34624	191	35035	32	35364	33
34521	192	34625	191	35036	32	35365	33
34522	192	34626	191	35037	32	35366	33
34523	192	34627	191	35038	32	35367	33
34524	192	34628	191	35039	32	35368	33
34525	192	34629	191	35040	32	35369	33
34526	192	34666	195	35042	32	35370	33
34527	192	34667	195	35044	32	35380	35
34528	194	34669	195	35045	32	35382	35
34529	194	34670	195	35046	32	35384	35
34530	194	34671	195	35047	32	35386	35
34531	194	34672	195	35075	32	35387	35
34532	194	34673	195	35132	32	35388	35
34533	194	34674	195	35134	32	35389	35
34534	194	34675	195	35300	34	35390	31
34535	194	34676	195	35301	34	35391	31
34536	194	34677	195	35302	34	35392	31
34537	194	34678	195	35303	34	35393	31
34543	194	34679	195	35304	34	35394	31
34544	194	34683	196	35305	34	35395	31
34545	194	34684	196	35306	34	35396	31
34546	194	34685	196	35307	34	35400	34
34547	194	34686	196	35308	34	35402	34
34548	194	34687	196	35309	34	35405	34
34549	194	34688	196	35320	31	35407	34
34550	194	34689	196	35321	31	35408	34
34551	194	34690	196	35322	31	35409	34
34552	197	34691	196	35323	31	35410	34
34553	194	34692	196	35324	31	36101	16
34554	194	34693	196	35325	31	36103	16
34556	197	34715	198	35326	31	36104	16
34557	197	34725	197	35330	33	36105	16
34588	194	34726	197	35331	33	36106	16
34589	194	34727	197	35332	33	36107	16
34590	194	34728	197	35333	33	36108	16



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
36109	16	36175	17	50136	82	50322	84
36110	16	36176	17	50137	82	50323	84
36111	17	36177	17	50138	82	50332	86
36113	17	36178	17	50141	82	50333	86
36114	17	36179	17	50142	82	50334	86
36115	17	36180	17	50145	82	50335	86
36116	17	39002	12	50146	82	50336	86
36117	17	39003	12	50147	82	50337	86
36118	17	39004	12	50150	82	50338	86
36119	17	39005	12	50151	82	50341	86
36120	17	39006	12	50152	82	50342	86
36121	16	39007	12	50153	82	50343	86
36123	16	39008	12	50164	82	50356	87
36124	16	39009	12	50167	82	50357	87
36125	16	39010	12	50168	82	50359	87
36126	16	39011	12	50169	82	50362	87
36127	16	39031	12	50171	82	50364	87
36128	16	39032	12	50172	82	50366	87
36129	16	39033	12	50222	83	50367	87
36130	16	39034	12	50223	83	50368	87
36131	17	39035	12	50224	83	50369	87
36133	17	39036	12	50225	83	50370	87
36134	17	39037	12	50226	83	50371	87
36135	17	39038	12	50227	83	50372	87
36136	17	39039	12	50228	83	50373	87
36137	17	39040	12	50231	83	50374	87
36138	17	39112	42	50232	83	50375	87
36139	17	39113	42	50233	83	50376	87
36140	17	39114	42	50242	84	50377	87
36141	38	39115	42	50243	84	50378	87
36142	38	39116	42	50244	84	50379	87
36143	38	39117	42	50245	84	50380	87
36144	38	39118	42	50246	84	50381	87
36145	38	50062	81	50247	84	50389	87
36146	38	50063	81	50248	84	50390	87
36147	38	50064	81	50251	84	50391	87
36148	38	50065	81	50252	84	50392	87
36150	37	50066	81	50253	84	50393	87
36151	37	50067	81	50282	83	50395	87
36152	37	50068	81	50283	83	50396	87
36153	37	50071	81	50284	83	50397	87
36154	37	50072	81	50285	83	50398	87
36155	37	50073	81	50286	83	50399	87
36156	37	50082	82	50287	83	50401	87
36161	16	50083	82	50288	83	50402	87
36163	16	50084	82	50291	83	50403	87
36164	16	50085	82	50292	83	50404	87
36165	16	50086	82	50293	83	50405	87
36166	16	50087	82	50312	84	50407	87
36167	16	50088	82	50313	84	50408	87
36168	16	50091	82	50314	84	50413	88
36169	16	50092	82	50315	84	50414	88
36170	16	50093	82	50316	84	50415	88
36171	17	50133	82	50317	84	50416	88
36173	17	50134	82	50318	84	50417	88
36174	17	50135	82	50321	84	50418	88

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
50419	88	50544	91	50678	95	51141	143
50420	88	50546	91	50679	95	51142	143
50421	88	50549	91	50680	95	51145	143
50422	88	50552	91	50681	95	51146	143
50424	88	50553	91	50752	97	51147	143
50425	88	50562	92	50753	97	51150	143
50427	88	50564	92	50754	97	51151	143
50428	88	50565	92	50755	97	51152	143
50429	88	50566	92	50756	97	51153	143
50437	88	50567	92	50757	97	51164	143
50438	88	50568	92	50758	97	51167	143
50440	88	50570	92	50761	97	51168	143
50441	88	50571	92	50762	97	51169	143
50443	88	50572	92	50763	97	51171	143
50444	88	50573	92	50772	92	51172	143
50453	89	50581	93	50773	92	51222	144
50454	89	50582	93	50774	92	51223	144
50455	89	50583	93	50775	92	51224	144
50456	89	50584	93	50776	92	51225	144
50457	89	50585	93	50777	92	51226	144
50458	89	50586	93	50778	92	51227	144
50459	89	50587	93	50780	312	51228	144
50460	89	50588	93	50782	312	51231	144
50461	89	50589	93	50783	312	51232	144
50462	89	50590	93	50784	312	51233	144
50463	89	50591	93	50785	312	51242	144
50464	89	50611	93	50786	312	51243	144
50465	89	50612	93	50787	312	51244	144
50466	89	50613	93	50788	312	51245	144
50467	89	50615	93	50789	312	51246	144
50468	89	50616	93	51062	142	51247	144
50471	89	50617	93	51063	142	51248	144
50472	89	50618	93	51064	142	51251	144
50474	89	50619	93	51065	142	51252	144
50480	90	50620	93	51066	142	51253	144
50484	90	50631	94	51067	142	51282	144
50485	90	50632	94	51068	142	51283	144
50486	90	50633	94	51071	142	51284	144
50487	90	50634	94	51072	142	51285	144
50488	90	50635	94	51073	142	51286	144
50489	90	50636	94	51082	142	51287	144
50490	90	50637	94	51083	142	51288	144
50491	90	50638	94	51084	142	51291	144
50492	90	50639	94	51085	142	51292	144
50493	90	50640	94	51086	142	51293	144
50494	90	50653	94	51087	142	51312	144
50495	90	50656	94	51088	142	51313	144
50498	90	50661	94	51091	142	51314	144
50500	90	50664	94	51092	142	51315	144
50524	91	50665	94	51093	142	51316	144
50526	91	50667	94	51133	143	51317	144
50529	91	50673	95	51134	143	51318	144
50532	91	50674	95	51135	143	51321	144
50533	91	50675	95	51136	143	51322	144
50534	91	50676	95	51137	143	51323	144
50535	91	50677	95	51138	143	51332	146



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
51333	146	51454	149	51772	151	52313	202
51334	146	51455	149	51773	151	52314	202
51335	146	51458	149	51774	151	52315	202
51336	146	51461	149	51775	151	52316	202
51337	146	51464	149	51776	151	52317	202
51338	146	51466	149	51777	151	52318	202
51341	146	51468	149	51778	151	52332	204
51342	146	51484	149	52062	200	52333	204
51343	146	51486	149	52063	200	52334	204
51356	146	51488	149	52064	200	52335	204
51357	146	51489	149	52065	200	52336	204
51359	146	51490	149	52066	200	52337	204
51362	146	51491	149	52067	200	52338	204
51364	146	51492	149	52068	200	52356	204
51366	146	51493	149	52082	201	52359	204
51367	146	51495	149	52083	201	52366	204
51368	146	51498	149	52084	201	52369	204
51369	146	51500	149	52085	201	52370	204
51370	146	51532	150	52086	201	52373	204
51373	146	51552	150	52087	201	52374	204
51374	146	51562	151	52088	201	52375	204
51375	146	51564	151	52133	201	52378	204
51378	146	51567	151	52134	201	52379	204
51379	146	51570	151	52135	201	52380	204
51380	146	51571	151	52136	201	52413	205
51381	146	51572	151	52137	201	52414	205
51390	146	51573	151	52138	201	52416	205
51391	146	51611	152	52141	201	52418	205
51392	146	51613	152	52142	201	52421	205
51393	146	51615	152	52145	201	52424	205
51396	146	51617	152	52146	201	52427	205
51397	146	51618	152	52147	201	52453	205
51398	146	51619	152	52152	201	52454	205
51399	146	51620	152	52153	201	52455	205
51405	146	51653	152	52222	202	52456	205
51407	146	51656	152	52223	202	52457	205
51408	146	51661	152	52224	202	52458	205
51413	147	51665	152	52225	202	52460	205
51414	147	51667	152	52226	202	52461	205
51416	147	51675	153	52227	202	52464	205
51417	147	51676	153	52228	202	52465	205
51418	147	51677	153	52242	202	52466	205
51419	147	51678	153	52243	202	52468	205
51421	147	51679	153	52244	202	52484	206
51422	147	51680	153	52245	202	52486	206
51424	147	51681	153	52246	202	52488	206
51425	147	51752	154	52247	202	52489	206
51427	147	51753	154	52248	202	52493	206
51428	147	51754	154	52282	202	52495	206
51429	147	51755	154	52283	202	52498	206
51437	147	51756	154	52284	202	52500	206
51438	147	51757	154	52285	202	52524	207
51440	147	51758	154	52286	202	52526	207
51441	147	51761	154	52287	202	52529	207
51443	147	51762	154	52288	202	52532	207
51453	149	51763	154	52312	202	52544	207

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
52546	207	60106	170	60802	172	61235	173
52549	207	60107	170	60803	172	61236	173
52552	207	60108	170	60804	172	61240	173
52562	207	60110	170	60875	171	61242	173
52564	207	60111	170	60876	171	61243	173
52566	207	60112	170	60877	171	61244	173
52567	207	60113	170	60878	171	61252	173
52568	207	60231	184	60905	171	61253	173
52570	207	60232	184	60906	171	61254	173
52571	207	60233	184	60907	171	61256	173
52572	207	60234	184	60908	171	61257	173
52573	207	60235	184	60935	171	61259	173
52611	208	60236	184	60936	171	61260	173
52612	208	60237	184	60937	171	61261	173
52613	208	60238	184	60938	171	61280	173
52615	208	60239	184	60955	171	61281	173
52616	208	60240	184	60956	171	61282	173
52617	208	60241	184	60957	171	61283	173
52618	208	60242	184	60958	171	61284	173
52619	208	60301	170	61000	172	61285	173
52620	208	60302	170	61002	172	61286	173
52653	208	60303	170	61003	172	61287	173
52656	208	60304	170	61004	172	61288	173
52661	208	60305	170	61005	172	61289	173
52664	208	60306	170	61006	172	61290	173
52665	208	60307	170	61007	172	61292	173
52667	208	60308	170	61008	172	61293	173
52752	209	60310	170	61010	172	61294	173
52753	209	60311	170	61011	172	61295	173
52754	209	60312	170	61012	172	61296	173
52755	209	60313	170	61013	172	61297	173
52756	209	60601	170	61104	173	61352	174
52757	209	60602	170	61110	29	61354	174
52758	209	60603	170	61112	29	61355	174
56319	222	60604	170	61120	30	61357	174
56321	222	60605	170	61121	30	61359	174
56322	222	60606	170	61191	120	61360	174
56323	222	60607	170	61192	120	61362	174
56324	222	60608	170	61193	120	61366	174
56325	222	60610	170	61194	120	61370	174
56326	222	60611	170	61195	120	61395	174
56327	222	60612	170	61196	120	61404	174
56328	222	60613	170	61197	120	61406	174
56329	222	60701	170	61212	173	61409	174
60082	171	60702	170	61213	173	61504	175
60083	171	60703	170	61214	173	61505	175
60084	171	60704	170	61215	173	61506	175
60085	171	60705	170	61217	173	61701	176
60086	171	60706	170	61218	173	61702	176
60087	171	60707	170	61219	173	61703	176
60088	171	60708	170	61220	173	61704	176
60101	170	60710	170	61225	173	61705	176
60102	170	60711	170	61226	173	61707	176
60103	170	60712	170	61227	173	61708	176
60104	170	60713	170	61228	173	61709	176
60105	170	60801	172	61229	173	61710	176



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
61711	176	62106	168	63463	185	65087	182
61714	176	62107	168	63464	185	65088	182
61715	176	62108	168	63473	186	65090	182
61716	176	62110	168	63558	177	65091	182
61717	176	62111	168	63559	177	65182	182
61718	176	62112	168	63560	177	65382	182
61719	176	62113	168	63561	177	65384	182
61721	176	62301	169	63562	177	65385	182
61730	176	62302	169	63564	177	65386	182
61732	176	62303	169	63565	177	65387	182
61733	176	62305	169	63706	183	65388	182
61734	176	62306	169	63707	183	65392	182
61745	176	62307	169	63708	183	65481	181
61801	177	62308	169	63709	183	65482	181
61802	177	62309	169	63710	183	65483	181
61803	177	62312	169	63711	183	65484	181
61804	177	62313	169	63712	183	65485	181
61805	177	62316	169	63713	183	65486	181
61806	177	62317	169	63853	178	65487	181
61809	177	62318	169	63854	178	65488	181
61811	177	62322	169	63855	178	65490	181
61814	177	62323	169	63856	178	65491	181
61818	177	62324	169	63857	178	65492	181
61819	177	62325	169	63860	178	65531	181
61820	177	62326	169	63861	178	65532	181
61821	177	62327	169	63862	178	65533	181
61823	177	62328	169	63863	178	65534	181
61824	177	62329	169	63864	178	65535	181
61825	177	62330	169	63865	178	65536	181
61845	177	62331	169	63866	178	65537	181
61846	177	62332	169	63873	178	65538	181
61932	176	62333	169	63884	178	65540	181
61933	176	62334	169	63885	178	65541	181
61935	176	62336	169	63886	178	65542	181
61936	176	62337	169	63887	178	65543	181
62001	168	62338	169	63888	178	65544	181
62002	168	62339	169	63889	178	67002	222
62003	168	62340	169	63892	178	67004	222
62004	168	62341	169	63893	178	67005	222
62005	168	63108	137	63894	178	67006	222
62006	168	63109	137	63895	178	67007	222
62007	168	63113	135	65040	182	67008	222
62008	168	63115	135	65044	182	67009	222
62010	168	63117	135	65045	182	67010	222
62011	168	63118	135	65046	182	67011	222
62012	168	63126	136	65050	182	67102	223
62013	168	63127	136	65051	182	67104	223
62020	175	63128	136	65052	182	67105	223
62022	175	63452	185	65053	182	67106	223
62024	175	63453	185	65054	182	67107	223
62050	168	63455	185	65081	182	67108	223
62055	168	63457	185	65082	182	67109	223
62102	168	63458	185	65083	182	67110	223
62103	168	63459	185	65084	182	67111	223
62104	168	63460	185	65085	182	67206	227
62105	168	63462	185	65086	182	67209	227

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
67211	227	67352	227	68005	226	68723	224
67212	227	67353	227	68006	226	68724	224
67214	227	67356	227	68007	226	68725	224
67215	227	67357	227	68008	226	68726	225
67218	227	67360	227	68009	226	68728	225
67219	227	67361	227	68010	226	68729	225
67220	227	67366	227	68011	226	68730	225
67225	227	67369	227	68102	224	68731	225
67226	227	67373	227	68104	224	68732	225
67227	227	67402	226	68105	224	68733	225
67228	227	67404	226	68106	224	68734	225
67229	227	67405	226	68107	224	68735	225
67230	227	67406	226	68108	224	68736	224
67231	227	67407	226	68109	224	68738	224
67232	230	67408	226	68110	224	68739	224
67233	227	67503	229	68111	224	68740	224
67234	230	67506	229	68302	225	68741	224
67235	230	67507	229	68304	225	68742	224
67236	230	67508	229	68305	225	68743	224
67237	230	67509	229	68306	225	68744	224
67238	230	67510	229	68307	225	68745	224
67239	227	67511	229	68308	225	68746	225
67243	230	67515	229	68309	225	68748	225
67244	227	67516	229	68310	225	68749	225
67245	227	67517	229	68311	225	68750	225
67246	227	67518	229	68682	230	68751	225
67247	227	67519	229	68684	230	68752	225
67248	227	67520	229	68685	230	68753	225
67250	227	67521	229	68686	230	68754	225
67251	227	67602	224	68687	230	68755	225
67252	227	67604	224	68688	230	68756	231
67253	227	67605	224	68689	230	68757	231
67260	227	67606	224	68690	230	68758	231
67261	227	67607	224	68691	230	68759	231
67269	227	67608	224	68692	231	68760	231
67270	227	67609	224	68694	231	68761	231
67305	223	67610	224	68695	231	68762	231
67307	223	67611	224	68696	231	68763	231
67309	223	67702	225	68697	231	68791	232
67312	223	67704	225	68698	231	68793	232
67313	223	67705	225	68699	231	68794	232
67317	223	67706	225	68700	231	68795	232
67318	223	67707	225	68701	231	68796	232
67323	223	67708	225	68703	228	68797	232
67324	223	67709	225	68707	228	68798	232
67325	223	67710	225	68708	228	68799	232
67327	223	67711	225	68709	228	68804	224
67330	223	67802	228	68710	228	68806	224
67337	223	67805	228	68711	228	68807	224
67338	223	67806	228	68715	228	68808	224
67344	227	67809	228	68716	224	68809	224
67346	223	67811	228	68718	224	68810	224
67347	227	67814	228	68719	224	68811	224
67348	227	67818	228	68720	224	68812	224
67349	227	68002	226	68721	224	68813	224
67350	227	68004	226	68722	224	68814	225



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
68816	225	81216	66	81707	68	82305	64
68817	225	81217	66	81708	68	82306	64
68818	225	81218	66	81709	68	82307	64
68819	225	81219	66	81710	68	82308	64
68820	225	81220	66	81711	68	82309	64
68821	225	81221	66	81713	68	82310	64
68822	225	81222	66	81714	68	82311	64
68823	225	81223	66	81715	68	82312	64
68833	228	81224	66	81716	68	82313	64
68837	228	81225	66	81717	68	82314	64
68838	228	81226	66	81718	68	82315	64
68839	228	81229	66	81719	68	82316	64
68840	228	81230	66	81720	68	82317	64
68841	228	81231	66	81721	68	82318	64
80102	65	81232	66	81722	68	82319	64
80103	65	81233	66	81724	68	82320	64
80104	65	81236	66	81726	68	82321	64
80105	65	81237	66	81802	69	82322	64
80302	65	81238	66	81803	69	82323	64
80303	65	81239	66	81804	69	82324	64
80304	65	81240	66	81805	69	82331	64
80305	65	81241	66	81806	69	82338	64
80602	65	81244	66	81807	69	82339	64
80603	65	81245	66	81809	69	82345	64
80604	65	81246	66	81811	69	82346	64
80605	65	81247	66	81814	69	82348	64
80702	65	81248	66	81818	69	82606	65
80703	65	81249	66	81819	69	82607	65
80704	65	81250	66	81820	69	82608	65
80705	65	81304	68	81821	69	82609	65
81002	66	81305	68	81822	69	82610	65
81003	66	81306	68	81823	69	82611	65
81004	66	81307	68	81824	69	82706	65
81005	66	81308	68	81825	69	82707	65
81006	66	81309	68	81826	69	82708	65
81007	66	81310	68	82002	63	82709	65
81008	66	81311	68	82003	63	82710	65
81009	66	81312	68	82004	63	82711	65
81010	66	81313	68	82005	63	83212	77
81011	66	81316	68	82006	63	83213	77
81106	65	81317	68	82007	63	83214	77
81107	65	81320	68	82008	63	83215	77
81108	65	81321	68	82009	63	83216	77
81109	65	81324	68	82010	63	83217	77
81110	65	81326	68	82011	63	83218	77
81111	65	81331	68	82102	63	83306	65
81204	66	81334	68	82103	63	83307	65
81206	66	81336	68	82104	63	83308	65
81207	66	81339	68	82105	63	83309	65
81209	66	81454	67	82106	63	83310	65
81210	66	81455	67	82107	63	83311	65
81211	66	81458	67	82108	63	83403	78
81212	66	81461	67	82109	63	83405	78
81213	66	81703	68	82110	63	83407	78
81214	66	81704	68	82111	63	83423	78
81215	66	81705	68	82303	64	83425	78

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
83427	78	85330	71	90351	339	90925	340
83712	75	85332	71	90357	338	90926	340
83713	75	85333	71	90358	340	90927	340
83714	75	85334	71	90363	338	90928	340
83715	75	85335	71	90365	339	90929	340
83716	75	85337	71	90371	339	90930	340
83717	75	85338	71	90372	339	90931	340
83718	75	85339	71	90373	339	90932	27
83719	75	85340	71	90374	339	90933	27
83720	75	85350	73	90375	339	90934	27
83721	75	85351	73	90376	339	90935	27
83803	70	85352	73	90391	339	90936	27
83804	70	85353	73	90394	339	90980	39
83805	70	85354	73	90396	339	90981	39
83806	70	85355	73	90401	100	90982	39
83807	70	85356	73	90402	100	90983	39
83833	70	85358	73	90403	100	90984	39
83834	70	85359	73	90404	100	90985	39
83835	70	85360	72	90405	100	90986	39
83836	70	85362	72	90406	100	90987	39
83837	70	85365	72	90407	100	90988	39
83838	70	85367	72	90408	100	90989	39
83839	70	85368	72	90409	100	91064	161
85032	74	85369	72	90410	100	91065	161
85033	74	85370	72	90411	100	91066	161
85034	74	90079	102	90412	157	91067	161
85035	74	90080	102	90465	211	91068	161
85036	74	90081	102	90466	211	91069	161
85037	74	90082	102	90467	211	91070	161
85038	74	90083	102	90468	211	91071	161
85042	74	90084	102	90523	323	91072	161
85044	74	90085	102	90563	340	91073	161
85045	74	90086	102	90775	311	91087	338
85046	74	90088	102	90776	311	91088	338
85047	74	90089	102	90778	311	91092	338
85072	74	90092	102	90779	311	91096	61
85075	75	90094	102	90780	311	91097	60
85132	75	90095	102	90781	311	91098	60
85134	75	90096	102	90783	311	91099	60
85300	73	90097	102	90797	336	91100	60
85301	73	90098	102	90798	336	91103	199
85302	73	90220	102	90799	336	91104	199
85303	73	90253	140	90881	101	91105	199
85304	73	90254	140	90882	101	91106	199
85305	73	90255	140	90883	101	91152	101
85306	73	90282	100	90884	101	91153	101
85307	73	90341	341	90885	101	91154	101
85308	73	90342	341	90886	101	91155	101
85309	73	90343	341	90887	101	91156	101
85320	71	90344	341	90888	101	91157	101
85321	71	90345	341	90891	101	91158	101
85322	71	90346	341	90892	101	91159	101
85323	71	90347	341	90893	101	91160	101
85324	71	90348	341	90922	340	91161	101
85325	71	90349	341	90923	340	91164	105
85326	71	90350	341	90924	340	91165	105



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
91166	105	92159	316	365.850.00.1	290	615.061.00.2	304
91167	105	94862	298	461.082.00.1	299	616.061.00.2	304
91168	105	94863	298	600.041.00.1	104	619.010.00.1	244
91169	105	94864	298	600.042.00.1	160	619.011.00.1	244
91170	105	94865	298	600.043.00.1	160	619.012.00.1	244
91171	105	94866	298	600.044.00.1	104	619.013.00.1	244
91172	105	94882	301	600.045.00.1	104	619.014.00.1	244
91173	105	94883	301	600.046.00.1	104	619.015.00.1	244
92080	232	94884	301	600.047.00.1	104	619.016.00.1	244
92082	232	94885	301	600.048.00.1	104	619.020.00.1	244
92083	232	94886	301	600.049.00.1	104	619.021.00.1	244
92084	232	94887	301	600.051.00.1	104	619.022.00.1	244
92085	232	94888	301	600.052.00.1	104	619.023.00.1	244
92086	232	94902	299	600.053.00.1	104	619.024.00.1	244
92087	232	94903	299	600.054.00.1	104	619.025.00.1	244
92088	232	94904	299	600.055.00.1	104	619.026.00.1	244
92089	232	94905	299	600.056.00.1	104	619.027.00.1	244
92100	309	94912	314	600.057.00.1	104	619.050.00.1	245
92101	309	94913	314	600.058.00.1	104	619.051.00.1	245
92102	309	94914	314	600.059.00.1	104	619.052.00.1	245
92103	309	94922	308	600.079.00.1	103	619.054.00.1	245
92104	309	94923	308	600.080.00.1	103	619.055.00.1	281
92105	309	94924	308	600.081.00.1	103	619.056.00.1	281
92106	309	94925	308	600.082.00.1	103	619.060.00.1	245
92107	309	94926	308	600.083.00.1	103	619.061.00.1	245
92108	309	94927	308	600.084.00.1	103	619.070.00.1	245
92109	309	94928	308	600.085.00.1	103	619.100.00.2	246
92110	310	94935	309	600.087.00.1	103	619.101.00.2	246
92112	310	94936	309	600.088.00.1	103	619.102.00.2	246
92120	310	94937	309	600.089.00.1	103	619.103.00.2	246
92122	310	94938	309	600.090.00.1	103	619.110.00.1	247
92123	310	94952	306	600.091.00.1	103	619.110.00.2	247
92124	310	94953	306	600.092.00.1	103	619.111.00.1	247
92125	310	94954	306	600.093.00.1	103	619.111.00.2	247
92126	310	94955	306	600.094.00.1	103	619.112.00.1	247
92127	310	94956	306	601.020.00.2	305	619.112.00.2	247
92128	310	94957	306	602.020.00.2	305	619.120.00.2	246
92129	310	94958	306	602.023.00.2	305	619.121.00.2	246
92132	311	94962	308	602.032.00.1	301	619.122.00.2	246
92140	315	94963	308	603.020.00.2	305	619.123.00.2	246
92142	315	94964	308	603.023.00.2	305	619.130.00.1	248
92143	315	94965	308	603.032.00.1	301	619.131.00.1	248
92144	315	94966	308	604.020.00.2	305	619.133.00.1	248
92145	315	94967	308	604.032.00.1	301	619.135.00.2	248
92146	315	94968	308	605.020.00.2	305	619.140.00.2	246
92147	315	241.576.00.1	298	605.032.00.1	301	619.141.00.2	246
92148	315	242.614.P5.1	322	606.020.00.2	305	619.142.00.2	246
92149	315	242.807.00.1	306	606.032.00.1	301	619.143.00.2	246
92150	316	360.850.00.1	290	610.059.00.1	303	619.145.00.2	246
92152	316	361.850.00.1	290	610.060.00.1	303	619.146.00.2	246
92153	316	362.834.26.1	98	611.061.00.2	304	619.147.00.2	246
92154	316	362.848.26.1	99	612.012.21.5	314	619.148.00.2	246
92155	316	362.851.26.1	99	612.061.00.2	304	619.150.00.1	248
92156	316	362.856.26.1	98	612.063.00.2	304	619.150.00.2	248
92157	316	362.857.26.1	99	613.061.00.2	304	619.151.00.1	248
92158	316	364.850.00.1	290	614.061.00.2	304	619.151.00.2	248

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
619.152.00.1	248	619.660.00.1	275	620.022.00.1	250	620.106.00.1	253
619.152.00.2	248	619.661.00.1	275	620.023.00.1	250	620.107.00.1	253
619.160.00.2	246	619.670.00.1	275	620.024.00.1	250	620.108.00.1	253
619.161.00.2	246	619.671.00.1	275	620.025.00.1	250	620.111.00.1	253
619.162.00.2	246	619.680.00.1	276	620.031.00.1	251	620.112.00.1	253
619.170.00.1	248	619.681.00.1	276	620.032.00.1	251	620.113.00.1	253
619.170.00.2	248	619.690.00.1	276	620.033.00.1	251	620.114.00.1	253
619.171.00.1	248	619.700.00.1	257	620.034.00.1	251	620.115.00.1	253
619.171.00.2	248	619.701.00.1	257	620.035.00.1	251	620.116.00.1	253
619.172.00.1	248	619.702.00.1	257	620.036.00.1	251	620.117.00.1	253
619.172.00.2	248	619.703.00.1	257	620.037.00.1	251	620.121.00.1	253
619.180.00.2	249	619.704.00.1	257	620.042.00.1	251	620.122.00.1	253
619.181.00.2	249	619.705.00.1	257	620.043.00.1	251	620.123.00.1	253
619.182.00.2	249	619.706.00.1	257	620.044.00.1	251	620.124.00.1	253
619.220.00.1	245	619.720.00.1	289	620.045.00.1	251	620.125.00.1	253
619.221.00.1	245	619.721.00.1	289	620.046.00.1	251	620.126.00.1	253
619.260.22.1	288	619.722.00.1	289	620.047.00.1	251	620.127.00.1	253
619.261.22.1	288	619.730.00.1	290	620.054.00.1	251	620.131.00.1	253
619.267.22.1	288	619.731.00.1	290	620.057.00.1	251	620.132.00.1	253
619.300.00.1	282	619.732.00.1	290	620.061.00.1	252	620.133.00.1	253
619.302.00.1	282	619.733.00.1	290	620.062.00.1	252	620.135.00.1	253
619.311.00.1	282	619.734.00.1	290	620.063.00.1	252	620.136.00.1	253
619.312.00.1	282	619.735.00.1	290	620.064.00.1	252	620.137.00.1	253
619.321.00.1	282	619.736.00.1	290	620.065.00.1	252	620.142.00.1	253
619.322.00.1	282	619.737.00.1	290	620.066.00.1	252	620.143.00.1	253
619.331.00.1	282	619.738.00.1	289	620.067.00.1	252	620.147.00.1	253
619.371.00.1	283	619.739.00.1	289	620.070.00.1	252	620.150.00.1	254
619.380.22.1	284	619.830.00.1	300	620.071.00.1	252	620.151.00.1	254
619.391.22.1	284	619.831.00.1	300	620.072.00.1	252	620.152.00.1	254
619.400.22.1	284	619.832.00.1	300	620.073.00.1	252	620.153.00.1	254
619.401.22.1	284	619.833.00.1	300	620.074.00.1	252	620.154.00.1	254
619.410.22.1	284	619.834.00.1	300	620.075.00.1	252	620.155.00.1	254
619.411.22.1	284	619.835.00.1	300	620.076.00.1	252	620.156.00.1	254
619.420.22.1	285	619.850.00.1	302	620.077.00.1	252	620.157.00.1	254
619.421.22.1	285	619.851.00.1	302	620.080.00.1	252	620.162.00.1	254
619.440.22.2	286	619.852.00.1	302	620.081.00.1	252	620.163.00.1	254
619.441.22.2	286	619.853.00.1	302	620.082.00.1	252	620.164.00.1	254
619.450.22.1	286	619.854.00.1	302	620.083.00.1	252	620.165.00.1	254
619.460.22.1	286	619.855.00.1	302	620.084.00.1	252	620.166.00.1	254
619.471.22.1	288	619.860.21.5	313	620.085.00.1	252	620.173.00.1	254
619.472.22.1	288	619.861.21.5	313	620.086.00.1	252	620.174.00.1	254
619.481.22.1	288	619.862.21.5	313	620.087.00.1	252	620.175.00.1	254
619.482.22.1	288	619.866.00.1	303	620.090.00.1	255	620.176.00.1	254
619.490.22.1	287	619.867.00.1	303	620.091.00.1	255	620.177.00.1	254
619.491.22.1	287	619.870.00.1	313	620.092.00.1	255	620.184.00.1	254
619.492.22.1	287	620.003.00.1	251	620.093.00.1	255	620.185.00.1	254
619.616.00.1	267	620.010.00.1	250	620.094.00.1	255	620.230.00.1	23
619.617.00.1	267	620.011.00.1	250	620.095.00.1	255	620.231.00.1	23
619.620.00.1	273	620.012.00.1	250	620.096.00.1	255	620.232.00.1	23
619.621.00.1	273	620.013.00.1	250	620.097.00.1	255	620.233.00.1	23
619.630.00.1	274	620.014.00.1	250	620.100.00.1	253	620.234.00.1	23
619.631.00.1	274	620.015.00.1	250	620.101.00.1	253	620.235.00.1	23
619.639.00.1	274	620.016.00.1	250	620.102.00.1	253	620.236.00.1	23
619.640.00.1	274	620.017.00.1	250	620.103.00.1	253	620.240.00.1	23
619.641.00.1	274	620.020.00.1	250	620.104.00.1	253	620.241.00.1	23
619.651.00.1	274	620.021.00.1	250	620.105.00.1	253	620.242.00.1	23



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
620.250.00.1	23	620.405.00.1	258	620.584.00.1	263	620.680.00.1	265
620.251.00.1	23	620.406.00.1	258	620.585.00.1	263	620.681.00.1	265
620.252.00.1	23	620.407.00.1	258	620.586.00.1	263	620.683.00.1	265
620.253.00.1	23	620.410.00.1	258	620.591.00.1	263	620.684.00.1	265
620.254.00.1	23	620.411.00.1	258	620.593.00.1	263	620.685.00.1	265
620.255.00.1	23	620.412.00.1	258	620.594.00.1	263	620.686.00.1	265
620.256.00.1	23	620.413.00.1	258	620.595.00.1	263	620.688.00.1	265
620.257.00.1	23	620.414.00.1	258	620.596.00.1	263	620.689.00.1	265
620.290.00.1	260	620.415.00.1	258	620.600.00.1	263	620.690.00.1	265
620.291.00.1	260	620.416.00.1	258	620.601.00.1	263	620.691.00.1	265
620.300.00.1	257	620.420.00.1	258	620.602.00.1	263	620.693.00.1	265
620.301.00.1	257	620.421.00.1	258	620.603.00.1	263	620.694.00.1	265
620.302.00.1	257	620.424.00.1	258	620.604.00.1	263	620.695.00.1	264
620.303.00.1	257	620.490.00.1	260	620.605.00.1	263	620.700.00.1	266
620.304.00.1	257	620.491.00.1	260	620.606.00.1	263	620.701.00.1	266
620.305.00.1	257	620.502.00.1	258	620.613.00.1	263	620.710.00.1	266
620.306.00.1	257	620.503.00.1	258	620.614.00.1	263	620.720.00.1	266
620.307.00.1	257	620.504.00.1	258	620.615.00.1	263	620.721.00.1	266
620.308.00.1	257	620.505.00.1	258	620.620.00.1	264	620.722.00.1	266
620.309.00.1	257	620.506.00.1	258	620.621.00.1	264	620.730.00.1	267
620.310.00.1	257	620.510.00.1	258	620.622.00.1	264	620.731.00.1	267
620.311.00.1	257	620.511.00.1	258	620.623.00.1	264	620.732.00.1	267
620.312.00.1	257	620.512.00.1	258	620.624.00.1	264	620.740.00.1	268
620.313.00.1	257	620.520.00.1	258	620.625.00.1	264	620.741.00.1	268
620.314.00.1	257	620.521.00.1	258	620.626.00.1	264	620.742.00.1	268
620.315.00.1	257	620.522.00.1	259	620.630.00.1	264	620.750.00.1	271
620.316.00.1	257	620.523.00.1	259	620.631.00.1	264	620.751.00.1	271
620.320.00.1	257	620.524.00.1	259	620.632.00.1	264	620.760.00.1	271
620.321.00.1	257	620.525.00.1	259	620.633.00.1	264	620.761.00.1	271
620.322.00.1	257	620.526.00.1	259	620.634.00.1	264	620.770.00.1	271
620.324.00.1	257	620.527.00.1	259	620.635.00.1	264	620.771.00.1	271
620.329.00.1	24	620.528.00.1	259	620.636.00.1	264	620.780.00.1	261
620.330.00.1	281	620.532.00.1	259	620.640.00.1	264	620.781.00.1	261
620.331.00.1	281	620.533.00.1	259	620.641.00.1	264	620.790.00.1	277
620.332.00.1	24	620.534.00.1	259	620.642.00.1	264	620.791.00.1	277
620.333.00.1	24	620.535.00.1	259	620.643.00.1	264	620.800.00.1	271
620.334.00.1	24	620.536.00.1	259	620.644.00.1	264	620.801.00.1	271
620.335.00.1	24	620.540.00.1	259	620.645.00.1	264	620.802.00.1	271
620.336.00.1	24	620.541.00.1	259	620.646.00.1	264	620.803.00.1	278
620.337.00.1	24	620.542.00.1	259	620.650.00.1	264	620.804.00.1	278
620.338.00.1	24	620.550.00.1	259	620.651.00.1	264	620.810.00.1	271
620.339.00.1	24	620.551.00.1	259	620.652.00.1	264	620.811.00.1	271
620.347.00.1	24	620.560.00.1	262	620.653.00.1	264	620.812.00.1	278
620.353.00.1	254	620.561.00.1	262	620.654.00.1	264	620.813.00.1	278
620.354.00.1	254	620.562.00.1	262	620.655.00.1	264	620.821.00.1	271
620.355.00.1	254	620.570.00.1	262	620.656.00.1	264	620.822.00.1	279
620.380.00.1	261	620.571.00.1	262	620.661.00.1	264	620.823.00.1	279
620.381.00.1	261	620.572.00.1	262	620.662.00.1	264	620.830.00.1	272
620.382.00.1	261	620.573.00.1	262	620.663.00.1	264	620.831.00.1	272
620.391.00.1	261	620.574.00.1	262	620.664.00.1	264	620.832.00.1	272
620.392.00.1	261	620.575.00.1	262	620.665.00.1	264	620.841.00.1	272
620.400.00.1	258	620.576.00.1	262	620.671.00.1	264	620.842.00.1	272
620.401.00.1	258	620.580.00.1	263	620.672.00.1	264	620.851.00.1	272
620.402.00.1	258	620.581.00.1	263	620.673.00.1	264	620.852.00.1	272
620.403.00.1	258	620.582.00.1	263	620.674.00.1	264	620.881.00.1	273
620.404.00.1	258	620.583.00.1	263	620.675.00.1	264	620.890.00.1	277

Art. no.	Page
620.891.00.1	277
620.921.00.1	273
620.951.00.1	272
620.981.00.1	272
620.990.00.1	277
620.991.00.1	277
650.681.00.3	268
650.683.00.3	269
650.687.00.3	269
650.688.00.3	269
650.689.00.3	270
650.791.00.3	270
650.792.00.3	271
650.921.00.2	348
651.681.00.3	268
651.791.00.3	270
652.682.00.3	268
652.685.00.3	269
653.420.00.1	280
653.428.00.1	279
653.429.00.1	279
653.434.00.1	282
653.435.00.1	282
653.478.00.1	280
653.940.26.1	352
654.940.26.1	352
655.078.00.1	345
655.079.00.1	346
655.080.00.1	347
655.081.00.1	346
655.082.00.1	348
655.083.00.1	348
655.084.00.1	346
655.085.00.1	350
655.086.00.1	350
655.104.00.1	354
655.940.26.1	352
656.940.26.1	352
657.940.26.1	352
658.940.26.1	352
659.940.26.1	352
690.019.00.1	322
690.102.00.1	351
690.103.00.1	351
690.111.00.1	349
690.112.00.1	349
690.115.00.1	349
690.121.00.1	330
690.122.00.1	330
690.123.00.1	330
690.124.00.1	330
690.125.00.1	330
690.126.00.1	330
690.190.00.1	330
690.191.00.1	330
690.192.00.1	330

Art. no.	Page
690.193.00.1	330
690.195.00.1	330
690.221.00.1	332
690.222.00.1	332
690.223.00.1	332
690.224.00.1	332
690.225.00.1	332
690.226.00.1	332
690.230.00.1	332
690.231.00.1	332
690.232.00.1	332
690.233.00.1	332
690.235.00.1	332
690.300.00.1	349
690.301.00.1	349
690.412.00.3	351
690.493.00.1	341
690.589.00.1	324
690.598.P5.1	325
690.600.00.1	324
690.912.00.1	352
690.913.00.1	352
690.915.00.1	353
690.916.00.1	353
690.917.00.1	353
690.918.00.1	353
690.930.00.1	357
690.936.00.1	349
690.937.00.1	353
690.938.00.1	353
690.940.00.1	357
690.941.00.1	357
690.942.00.1	294
691.017.P5.1	322
691.030.00.1	344
691.031.00.1	344
691.032.00.1	345
691.033.00.1	348
691.034.00.1	348
691.035.00.1	345
691.036.00.1	347
691.037.00.1	347
691.106.00.1	341
691.129.00.1	358
691.137.00.1	333
691.152.00.1	354
691.153.00.1	355
691.154.00.1	356
691.155.00.1	356
691.161.00.1	355
691.181.00.1	334
691.182.00.1	334
691.183.00.1	334
691.185.00.3	334
691.186.00.1	336
691.187.00.1	337

Art. no.	Page
691.188.00.1	335
691.189.00.1	336
691.191.00.1	335
691.192.00.1	335
691.193.00.1	335
691.194.00.1	335
691.195.00.1	335
691.196.00.1	335
691.197.00.1	333
691.198.00.1	331
691.200.00.1	331
691.203.00.1	334
691.218.P5.2	323
691.219.P5.2	324
691.229.P5.2	325
691.296.00.2	334
691.297.00.3	334



Geberit Sales Ltd

Geberit House
Edgehill Drive
Warwick
CV34 6NH

T 01926 516 800

F 01926 400 101

In Eire +44 (0)1926 516 800

Literature 0800 007 5133

enquiries@geberit.co.uk

www.geberit.co.uk